

1.543 [39.20]

1.311 [33.30]

0.994 [25.25]

A2

A3

即

0.492 [12.50]

### SPECIFICATIONS:

 ELECTRICAL:

 INSULATOR RESISTANCE:
 5 GΩ MIN.

 WORKING VOLTAGE:
 250V

 OPERATING TEMPERATURE:
 -55°C TO +125°C

 POWER CONTACT RESISTANCE:
 2.0 mΩ MAX.

 POWER CONTACT AMPERAGE:
 SEE P/N KEY

#### MECHANICAL:

CONTACT INSERTION FORCE:4.5 Kg MAX.CONTACT SEPARATION FORCE:0.3 Kg MIN.

#### MATERIALS: CONTACTS:

INSULATOR:

SHELL:

SEAL:

BRACKET:

BOARD LOCK:

COPPER ALLOY, GOLD FLASH PBT UL94V-0 RATED 230°C PROCESS TEMP. NICKEL PLATED STEEL NICKEL PLATED STEEL NICKEL PLATED BRASS F08 FLEXIBLE ADHESIVE


## MEETS IP67 STANDARDS

(SEE PAGE 3 FOR SEALING DETAILS)



00 = 40 AMP POWER // NO BRACKET // STANDARD PCB TAILS – 46 = 40 AMP POWER // #4-40 BRACKET // STANDARD PCB TAILS 62 = 40 AMP POWER // #4-40 BRACKET // 2.22mm PCB TAILS

1 = GOLD FLASH -

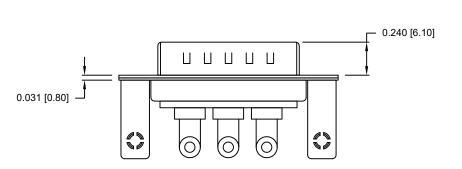

SEE SHEET 2 FOR CONTACT & BRACKET DIMENSION DETAILS

|  |                     | UNITS = inches [mm] | DO | NOT SC/       | ALE F      | RON | 1 DRAW | ING      |
|--|---------------------|---------------------|----|---------------|------------|-----|--------|----------|
| ONS ARE<br>ALL NOT<br>AS THE<br>ALE OF<br>MISSION. | DRAWN:<br>M. SIGMON | NorCom              | np | SCALE:<br>NTS | sheet<br>1 | OF  | 3      | REV<br>4 |
|  | DATE:<br>04/22/2013 | NorCom              |    | DWG NO.       | 584S3      | W31 | 03L461 |          |

# Rohs Compliant

THESE DRAWINGS AND SPECIFICATION THE PROPERTY OF NOrComp AND SHUBE BE REPRODUCED, COPIED OR USED J BASIS FOR THE MANUFACTURE OR S APPARATUS WITHOUT WRITTEN PER

0.327 [8.30]

몝

10°

К М

