



Data sheet | Item number: 787-6716

Switched-mode power supply; 1-phase; 24 VDC output voltage; 4 A output current; PowerBoost

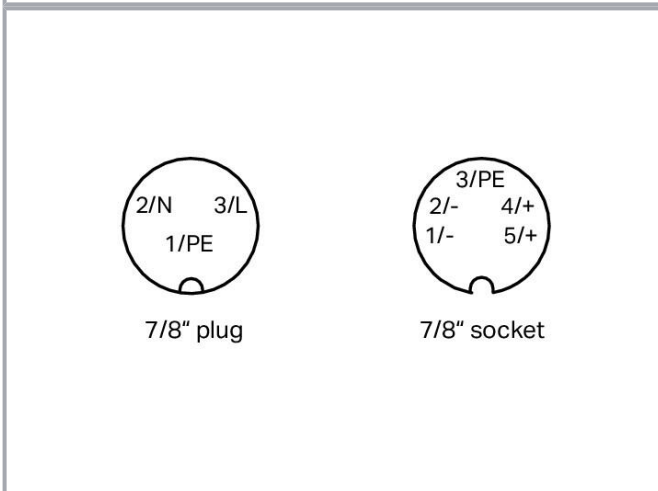

www.wago.com/787-6716

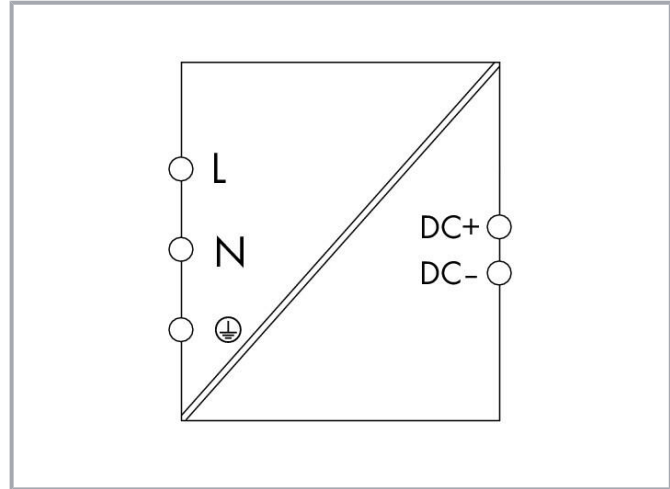

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Item description

Features:

- Switched-mode power supply with PowerBoost
- Low-profile, compact design
- Extremely robust, fully encapsulated housing (IP67)
- Active power factor correction
- High efficiency up to 92.3%
- Surrounding air temperature up to 85°C
- Suitable for both parallel and series operation

Data

Technical data

Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	AC/DC 100 ... 240 V
Input voltage range	AC/DC 90 ... 265 V
Nominal mains frequency range	47 ... 63.6 Hz; 0 Hz
Input current I_i	$\leq 0.5\text{ A}$ (250 VAC); $\leq 1.1\text{ A}$ (100 VAC)
Inrush current	$\leq 9\text{ A}$
Power factor	≥ 0.98
Power factor correction (PFC)	Active
Mains failure hold-up time	$\geq 45\text{ ms}$

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V
Output voltage range	$\pm 2\%$
Nominal output current $I_{o\text{ nom}}$	4 A
Nominal output power	96 W
Residual ripple	$\leq 100\text{ mV}$ (peak-to-peak); $\leq 20\text{ mV}$ (rms)
Overload behavior	Constant current
PowerBoost	DC 6 A (5 s; without voltage drop)

Subject to changes. Please also observe the further product documentation!

Signaling and Communication

Signaling	1 x LED DC OK (green) 1 x Overload LED (red)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)

Efficiency/power losses

Power loss P_l	$\leq 1 \text{ W}; \leq 7.9 \text{ W}$ (nominal load)
Efficiency (typ.)	92.3 % (230 VAC)

Circuit protection

Internal fuse	T 6.3 A
Backup fusing (recommended)	Circuit breaker: 4 ... 20 A; Characteristic: C T 20 A in building installations

Safety and protection

Protection class	I
Protection type	IP67
Overvoltage protection; secondary	$\leq 30 \text{ VDC}$ (per IEC 61131)
Short-circuit-protected	Yes
Parallel operation	3 devices (max.)
Series operation	2 devices (max.)
MTBF	> 960,000 h

Connection data

Connection type 1	Input
Connection technology	7/8"; 3-pole plug
Connection type 2	Output
Connection technology 2	7/8"; 5-pole socket

Physical data

Width	111 mm / 4.37 inches
Height	141 mm / 5.55 inches
Depth	54 mm / 2.123 inches

Subject to changes. Please also observe the further product documentation!



Mechanical Data

Mounting type	Screw mount
---------------	-------------

Material Data

Weight	1100 g
--------	--------

Environmental requirements

Ambient temperature (operation)	-40 ... +85 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	4 ... 100 %
Derating	-3.84 W/K (> 60 °C)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204 UL 508

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	box
Country of origin	CZ
GTIN	4055143644877
Customs tariff number	85044083900

Environmental Product Compliance



RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates


General approvals

Certificate

Subject to changes. Please also observe the further product documentation!

Logo	Approval	Additional Approval Text	name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02.B. 00089_19
	UL Underwriters Laboratories Inc.	UL 508	E255817







Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Cables and pluggable connectors

Power supply cable

	Item no.: 787-6716/9310-030 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 3-pole; Socket, straight; Length: 3 m	www.wago.com/787-6716/9310-030
	Item no.: 787-6716/9310-050 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 3-pole; Socket, straight; Length: 5 m	www.wago.com/787-6716/9310-050
	Item no.: 787-6716/9310-100 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 3-pole; Socket, straight; Length: 10 m	www.wago.com/787-6716/9310-100
	Item no.: 787-6716/9510-015 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 5-pole; Plug, straight; Length: 1.5 m	www.wago.com/787-6716/9510-015
	Item no.: 787-6716/9510-030 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 5-pole; Plug, straight; Length: 3 m	www.wago.com/787-6716/9510-030
	Item no.: 787-6716/9510-050 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 5-pole; Plug, straight; Length: 5 m	www.wago.com/787-6716/9510-050

Pluggable connectors

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item no.: 787-6716/9000-1000
Pluggable connector, 7/8 inch; 7/8 inch; 3-pole

www.wago.com/787-6716/9000-1000



Item no.: 787-6716/9100-000
Pluggable connector, 7/8 inch; 7/8 inch; 3-pole; Plug, straight

www.wago.com/787-6716/9100-000



Item no.: 787-6716/9300-000
Pluggable connector, 7/8 inch; 7/8 inch; 3-pole; Socket, straight

www.wago.com/787-6716/9300-000



Item no.: 787-6716/9500-000
Pluggable connector, 7/8 inch; 7/8 inch; 5-pole; Plug, straight

www.wago.com/787-6716/9500-000



Item no.: 787-6716/9400-000
Pluggable connector, 7/8 inch; 7/8 inch; 3-pole; Socket, angled

www.wago.com/787-6716/9400-000



Item no.: 787-6716/9600-000
Pluggable connector, 7/8 inch; 7/8 inch; 5-pole; Plug, angled

www.wago.com/787-6716/9600-000



Item no.: 787-6716/9700-000
Pluggable connector, 7/8 inch; 7/8 inch; 5-pole; Socket, straight

www.wago.com/787-6716/9700-000



Item no.: 787-6716/9800-000
Pluggable connector, 7/8 inch; 7/8 inch; 5-pole; Socket, angled

www.wago.com/787-6716/9800-000

Downloads

Documentation

Bid Text

787-6716 X81 - Datei	2019 Jul 4	xml 6.2 kB	Download
-------------------------	------------	---------------	----------

787-6716 docx - Datei	2019 Jun 12	docx 19.3 kB	Download
--------------------------	-------------	-----------------	----------

Instruction Leaflet

Primär getaktete Stromversorgung IP67 DC 24 V, 4 A	2021 May 18	pdf 457.9 kB	Download
---	-------------	-----------------	----------

Subject to changes. Please also observe the further product documentation!



Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

CAD/CAE-Data

CAE data

EPLAN Data Portal 787-6716	URL	Download
----------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-6716	URL	Download
Switched-mode power supply; 1-phase; 24 VDC output voltage; 4 A output current; PowerBoost		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.