
т	۵	п –	m	0





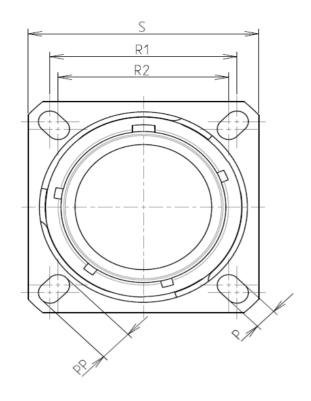

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

1	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	-65°C to +200°C			
	-Salt Spray	: 2000 hours			

8D 0

G

17

Μ

22

S

F

A L

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
V THREAD	M25x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 17-22

CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : A** 



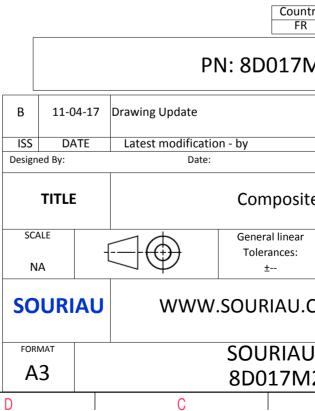

	σ		A			
					4	
AS EXA	MPLE				3	
whic er of t idatio untry R	non-conformit h does not co he Parties or b n, technical no Jurisd	mply with by a third part			2	
				MOD N°		
site	customer drawing te Receptacle 8D series					
ar	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N° 2SAL-C			SHEET 1/2		
	B		А		J	

F	Ŧ	۵	г П	m		0	
4		Contact Layout 22				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cut
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for receptacle:	n A A
	F					SOURIAU shall not be due to a use of the the Specifications issued (professional re	liable for a Products v d by either ecommend
N					B 1 ISS	PN: 8	
					Designed E	TLE Co	Omposi neral linear olerances: ±
	Н	G	F	E			

