## PRODUCT DATASHEET CS17642\_STRADELLA-IP-64-T4-B

## STRADELLA-IP-64-T4-B

Wide IESNA Type IV forward-throw beam for wide area lighting like car parks.

## **SPECIFICATION:**

Dimensions	x mm
Height	0 mm
Fastening	pin, screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes 🕕



## **MATERIALS:**


Component	Туре	Material	Colour	Finish
STRADELLA-IP-64-T4-B	Multi-lens	PMMA	clear	
STRADELLA-IP-64-SEAL	Seal	Silicone	milky	

## **ORDERING INFORMATION:**

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CS17642_STRADELLA-IP-64-T4-B	Multi-lens	108	108	36	9.2
» Box size: 476 x 273 x 247 mm					



## PRODUCT DATASHEET CS17642\_STRADELLA-IP-64-T4-B

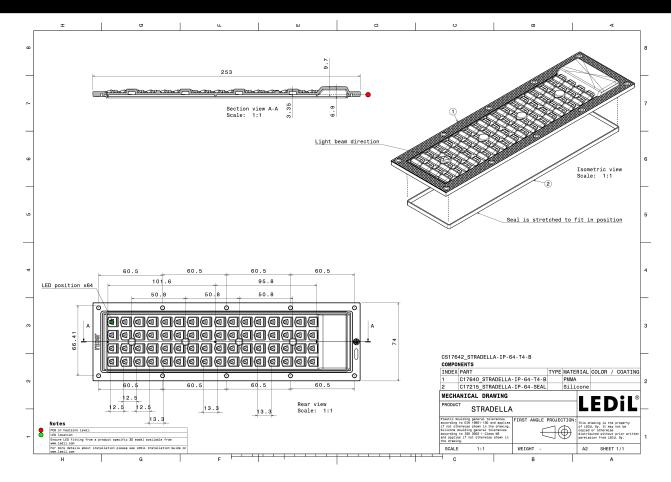

See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>


# PRODUCT DATASHEET CS17642\_STRADELLA-IP-64-T4-B

## **OPTICAL RESULTS (MEASURED):**

## OSRAM

LED PrevaLED Brick MP 4x16

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White




## **TRIDONIC**

Required components:

LED RLE 4x16 4000lm MP ADV2 OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:




## **OPTICAL RESULTS (SIMULATED):**

## **PHILIPS**

LED Fortimo FastFlex LED 4x16 DHE G4

FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:




## **SAMSUNG**

LED HiLOM RM64 (LM301B)

FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:



4/5



## **PRODUCT** DATASHEET CS17642 STRADELLA-IP-64-T4-B

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

## **Ledil Optics Technology** (Shenzhen) Co., Ltd.

# 405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

## Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy