



Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
01.2	Design Release		SEE ECN# 014145	EJF	11/16/17	EJH	11/16/17

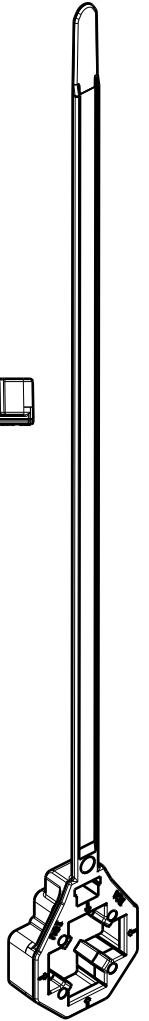


ISOMETRIC VIEW

- PERFORMANCE REQUIREMENTS:
1. STUD MOUNT PUSH ON FORCE: 45 NEWTONS (10 LBS) MAX ON EACH APPLICABLE STUD SIZE AT DRY AS MOLDED
 2. STUD MOUNT PULL OFF FORCE: 222 NEWTONS (50 LBS) MIN ON EACH APPLICABLE STUD SIZE AT 2.5% MOISTURE
 3. APPLICABLE STUD SIZE:
 - A. M12 x 1.75
 4. CABLE TIE MIN LOOP TENSILE STRENGTH: 355 NEWTONS (80LBS)
 5. BUNDLE RANGE: 3.5MM TO 50MM
 6. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
 7. MAX ALLOWABLE FLASH OR MISMATCH TO BE 0.50MM

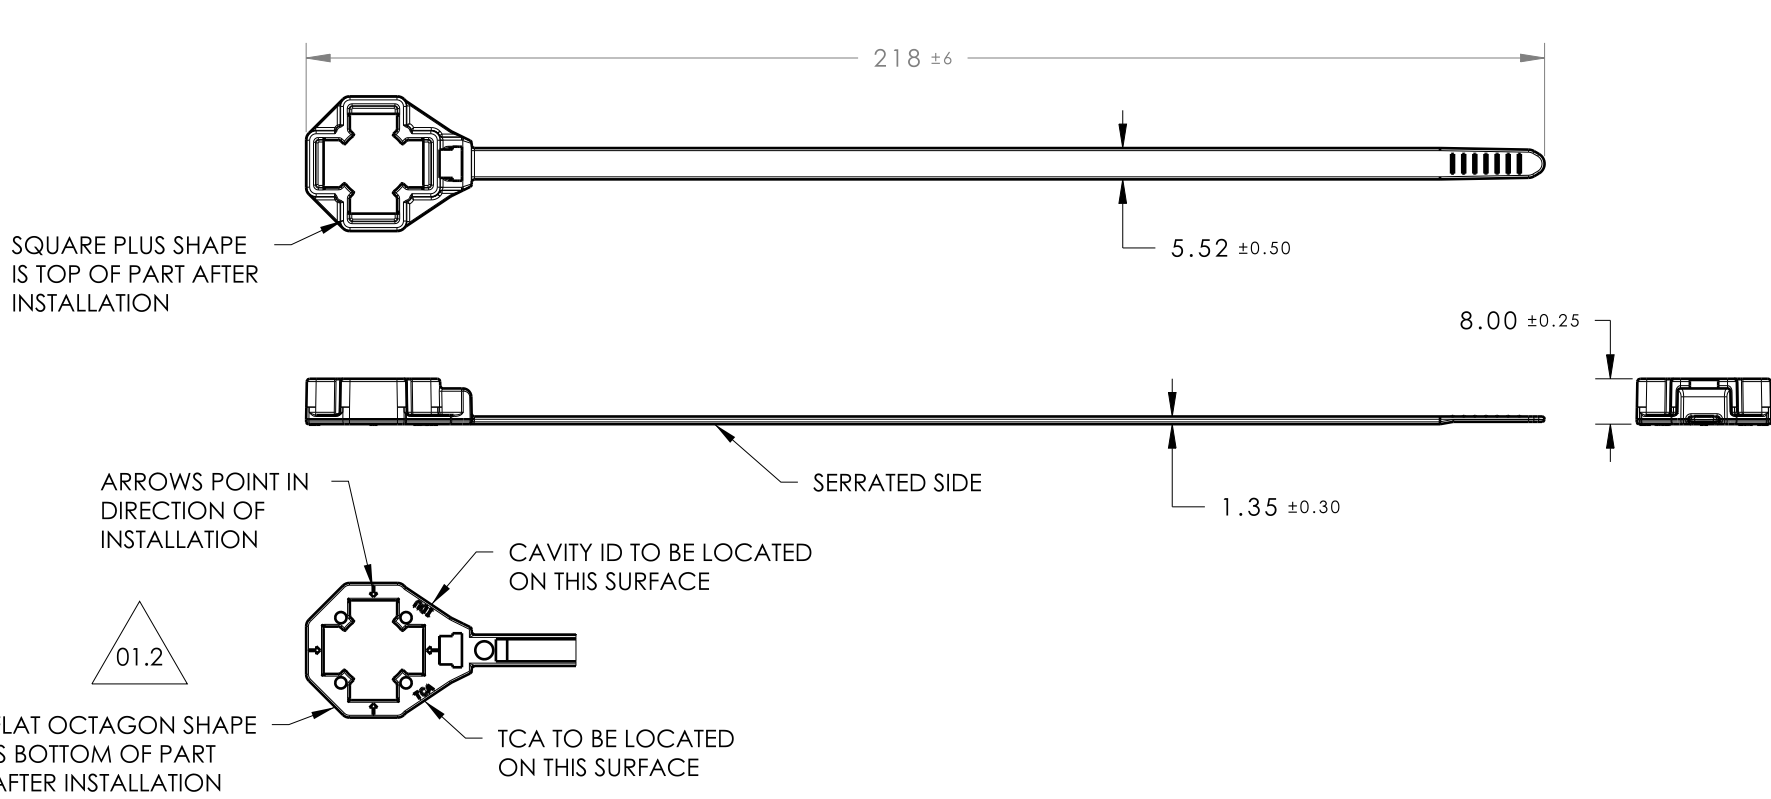

MATERIAL	COLOR
PA66HIRHS	BLACK
PA46	BROWN

Material SEE CHART COLOR: SEE CHART	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	EJF	10/11/17	Article/Type-No T80ROSLPSB12U Title LOW PROFILE M12 STUD MOUNT WITH 80LB CABLE TIE	Scale	3:4	
	Tolerance defined on each dimension				Approved	KVH		10/11/17	Project Number 16-0336	
		North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No 16-0336-011-CSU		Production : Phase	Format AH		
								Sheet		1/1