

FTR.00.250.CTA

SUMMARY

Wires

Low High	0 0	
Coax Triax	1	
Quad	0 0	Download Request a quote
Fiber Fluidic	0 0	Catalog
Series	00	
Termination type IP rating	Male solder 50	
Cable Ø Status	0.00 - 0.00 mm active	
Alternative part		

Image is for illustrative purpose only

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FTR*: Elbow plug with receptacle
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Variant	
Weight	5.56 g

Performance

Configuration	00.250 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated Current	4 Amps

Specifications

Contact Type: Coaxial 50 Ohm (Solder) Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.6 mm (0.024in) Test voltage: 2.1 kV (rms) R (max): 6.1 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest: 2100 V (AC), 3000 V (DC)


Impedance: 50 Ohm VSWR: 1.09 + 0.11 * f/GHz

Others

Endurance (Shell): 5000 mating cycles F ret (min): 100 N Salt Spray Corrosion: >1000 hr IP Rating: 50

DRAWINGS

Draws

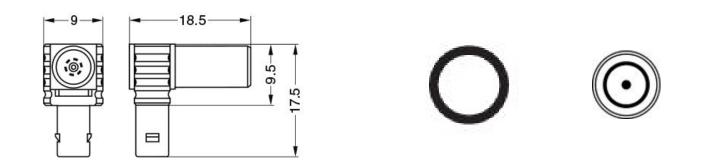

Dimensions

	А	L
mm.	9	18.5
in.	0,35	0,73

RECOMMENDED BY LEMO

Tools

None

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.