


T351F335M050AS7301

Aliases (T351F335M050ASTR)

T351, Tantalum, MnO2 Tantalum, Commercial Grade, 3.3 uF, 20%, 50 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 2.54mm

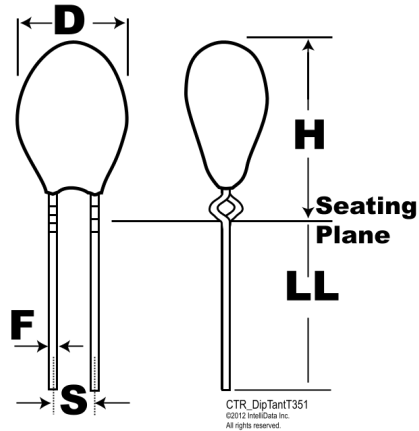

Click [here](#) for the 3D model.

Dimensions

D	6mm
H	12.2mm
S	2.54mm +/-0.38mm
LL	4.75mm +/-0.81mm
F	0.5mm +/-0.05mm

Packaging Specifications

Packaging	T&R, 305mm
Packaging Quantity	1000

General Information

Series	T351
Dielectric	MnO2 Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage
RoHS	No
Prop 65	⚠ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov .
SCIP Number	Oc1392c3-c7b9-4178-827c-fa26617a3178
Termination	Lead (SnPb)
AEC-Q200	No
Notes	Longest Lead Is Positive.

Specifications

Capacitance	3.3 uF
Capacitance Tolerance	20%
Voltage DC	50 VDC (85C), 33 VDC (125C), 0.5 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	5%
Leakage Current	1.3 uA