


Tool Specification

1. Part Number: YRS-692

2. Terminal: SXA/SXM/SXAM-001T-P0.6

3. Application

Crimp Position	Wire Size	Tensile Strength N (kgf)	Strip Length mm
28-26	UL1007 AWG 28	10(1.0) min.	2.0
28-26	(UL1007 AWG 26)	(20(2.0) min.)	2.0
24-22	UL1007 AWG 24	30(3.1) min.	2.0
24-22	(UL1007 AWG 22)	(40(4.1) min.)	2.0

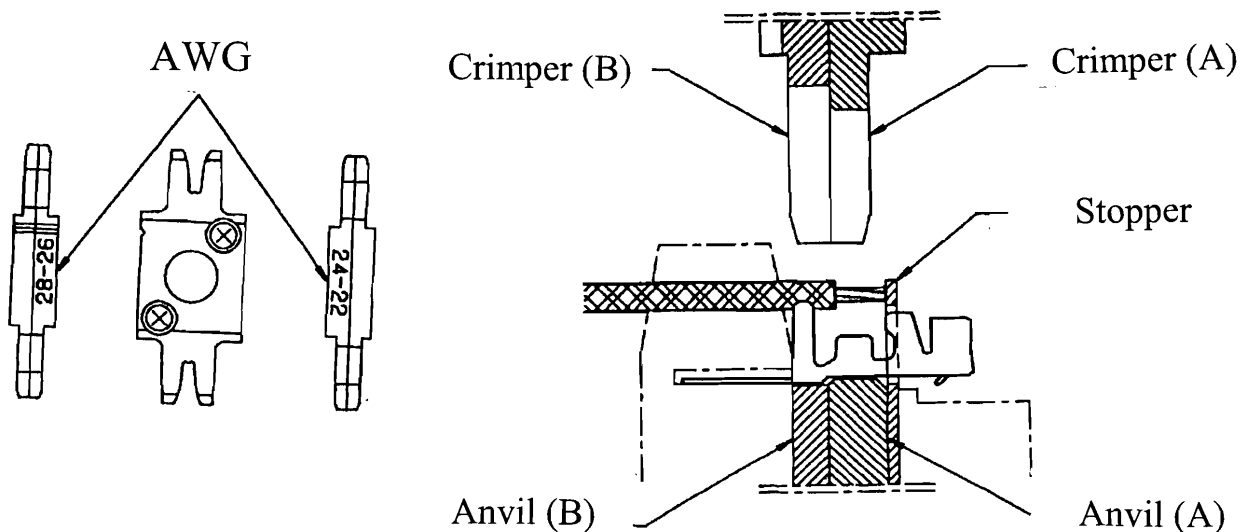

- Check the crimp appearance and tensile strength prior to use.
- Select the appropriate crimp position based on the wire size that will be used.
- The wire size in () above could cause excessive crimping. Check the tensile strength and crimp appearance to confirm an acceptable crimp.
- The insulation barrel is set for type of wire listed and is not adjustable.