


т	G		. m		
 			-	_	

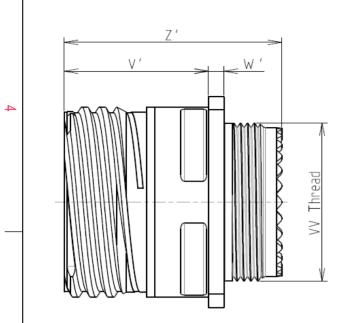

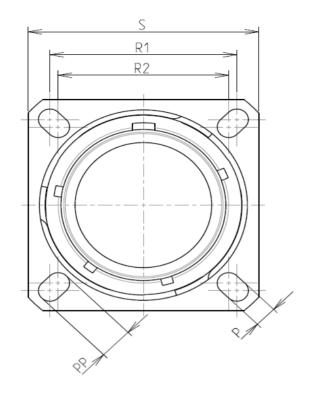



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +200°C				

: 2000 hours

8D 0

G

13

Μ

98

Н


F

Е

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
۷'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M18x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

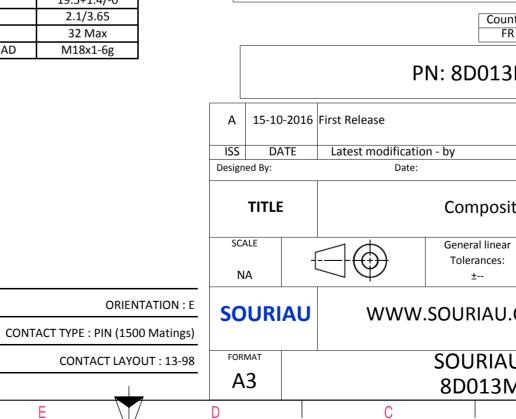

σ		>	_		
			4		
IS EXAMPLE			3		
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)					
R Not Listed					
		MOD N°			
ite Receptacl	CUSTOMER DRAWING e Receptacle 8D series				
ar	NPRDS / PROJECT 859				
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° SHEET M98HE-C 1/2					
B	A	\ \	J		

		۵	г	m			0	
		Contact Layout						Panel Cutou
4		$X \begin{pmatrix} \bullet & \bullet \\ $					RE FLANGE RECEPTACLE REAR MOUNTING	(TYPE 0)
	Cont positio A B C C D E F G G H J J K	n ID (mm) (mm) + 000 (0.00) + .195 (4.95) + .125 (3.18) + .150 (3.81) + .123 (4.90) + .030 (0.76) + .104 (4.17) 105 (2.67) + .000 (0.00) 135 (3.43) 164 (4.17) 105 (2.67) 193 (4.90) + .030 (0.76) 193 (4.90) + .030 (0.76) 193 (4.91) + .030 (0.76) 193 (4.91) + .030 (0.76) 193 (4.17) 105 (2.67) 193 (4.91) + .030 (0.76) 193 (4.91) 015 (0.381) + .065 (1.65) 015 (0.38)						
ω	Shell Arrangement N size no. cr	Number of contacts Size contacts Service rating Contact location Supersedes 10 20 I All MS20051-98						Dim ØA ØAA R1 ØT
							due to a use the Specification	not be liable for any of the Products whi s issued by either of ional recommendati
N					F			Country FR
							F	N: 8D013N
					A	15-10-2016 DATE	Latest modificati	
					Design		Date:	
					SCA	TITLE		Composite General linear
<u> </u>					N		\square	Tolerances:
					SO	URIAU	WWW	SOURIAU.C
					FORM			SOURIAU
	H	G	F	E	D		С	8D013M9
					V			

