

т	۵	<b>п</b>	m	0



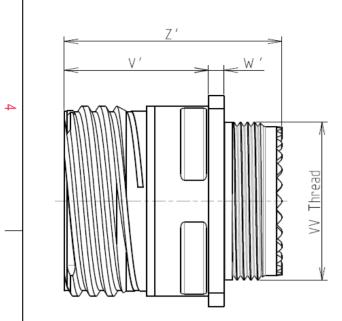



Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65℃ to +175℃		
-Salt Spray	: 2000 hours		

: 21.9 g ± 10%

8D 0

G

15

J

05


S

F

Е

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M22x1-6g		

Е

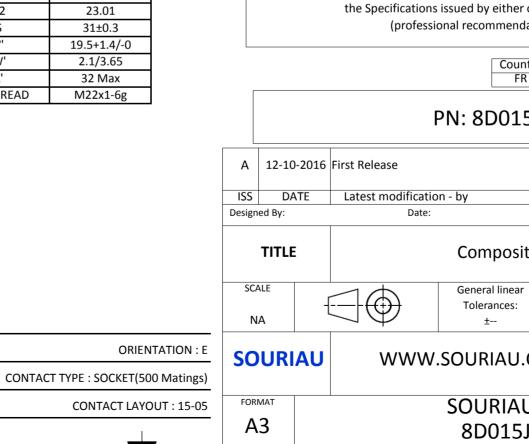

D

0		σ		А		
						4
LAY	YOUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						
PN: 8D015J05SE						
Latest modificatio	n - by				MOD N°	
Date:	,		CUSTON	IER DRAWING		
Composite Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±	NPRDS / PROJECT 859			1	
WWW.SOURIAU.CO		This document is the prop SOURIAU it must not be reproduc communicated without pe		ed or		
	SOURIAU I 8D015J0				SHEET	
С	0001010	B		A		J

ſ	т	G	н <b>г</b>	m	D	0	
		Contact Layout				Par	nel Cutou
4	د. 	$ \begin{array}{c}  & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & &$			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
		X-axis         Y-axis           (mm)         (mm)           +.000 (0.00)         +.100 (2.54)           +.174 (4.42)         +.024 (0.61)           +.094 (2.39)        148 (3.76)          094 (2.39)        148 (3.76)          174 (4.42)         +.024 (0.61)			1 2 2		<u></u>
ယ						Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recon	ducts wh either of
N							Countr FR
					A 12-10-2	PN: 8	0015.
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Com	posite
<u> </u>					SCALE NA	Genera Tolera ±	ances:
					SOURIA	U WWW.SOUR	IAU.C
					FORMAT A3	SOU 8D	RIAU 015J(
	Н	G	F	E	D	C	

