



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1611-001/B MODULAR CABLE

| | |
|------------------------------------|--|
| CHANGE NOTIFICATION: | PCN 20220425_DK-1611-001/B |
| DESCRIPTION OF CHANGES: | CHANGE OF DATA SHEET CHANGE OF DATA SHEET New Draw.-No. ASS_7510_CAreV01 |
| REASON FOR CHANGE: | CHANGE OF PRODUCT LOCATION CHANGE OF PRODUCT LOCATION |
| KEY CHARACTERISTICS OF CHANGE: | Details see page 3 |
| PRODUCTS AFFECTED: | DK-1611-001/B |
| DATE OF CHANGE AND IMPLEMENTATION: | CHANGE: WEEK 18 / YEAR 2022 IMPLEMENTATION: 25/4/2022 |
| RESPONSE: | NO RESPONSE TO THIS NOTIFICATION IS REQUIRED |

PCN REVISION HISTORY:

DATE OF REVISION: 25/4/2022

REVISION NUMBER: 00

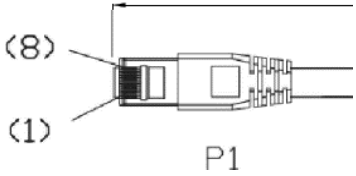
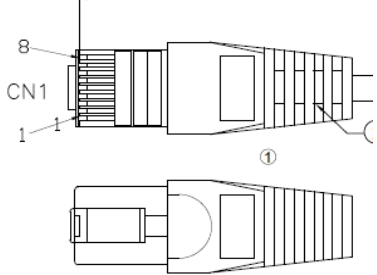
page 1/



Auf dem Schüffel 1
 D-58513 Lüdenscheid
 Tel.: +49-2351 - 554-200
 Fax: +49 (2351) 554-861
 info@assmann-wsw.com
 www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
 MODIFICATION / REVISION DATE: 25/4/2022

| DK-1611-001/B OLD VERSION | DK-1611-001/B NEW VERSION | | | | | | | | | | | | | | | | | | | | |
|--|---|-------------|-----|--|---|-----------------|---|---|-----------|---|--|---|---|-------|---|---|-----|--|-------|-----|---------------|
| <p>Appearance</p>  <p style="text-align: center;">P1</p> <p>BOM</p> <p>Material:</p> <ul style="list-style-type: none"> Conductor: 24AWG 7*0.19±0.015mm Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown Cable jacket printing: DIGITUS Cat6 U-UTP PATCH CORD ISO/IEC 11801 & TIA/EIA 568-B.2-1 24AWGx4p CM(UL) C(UL) Wiring T568B Color P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2 | <p>Appearance</p>  <p>BOM</p> <table border="1"> <tbody> <tr> <td>①</td> <td>△</td> <td>Molding PVC</td> <td>2</td> <td>Molding PVC 65P</td> </tr> <tr> <td>①</td> <td>△</td> <td>RJ45 CONN</td> <td>2</td> <td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td> </tr> <tr> <td>①</td> <td>△</td> <td>CABLE</td> <td>1</td> <td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm</td> </tr> <tr> <td>NO.</td> <td></td> <td>NAME.</td> <td>QTY</td> <td>SPECIFICATION</td> </tr> </tbody> </table> | ① | △ | Molding PVC | 2 | Molding PVC 65P | ① | △ | RJ45 CONN | 2 | RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2 | ① | △ | CABLE | 1 | CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm | NO. | | NAME. | QTY | SPECIFICATION |
| ① | △ | Molding PVC | 2 | Molding PVC 65P | | | | | | | | | | | | | | | | | |
| ① | △ | RJ45 CONN | 2 | RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2 | | | | | | | | | | | | | | | | | |
| ① | △ | CABLE | 1 | CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm | | | | | | | | | | | | | | | | | |
| NO. | | NAME. | QTY | SPECIFICATION | | | | | | | | | | | | | | | | | |
| FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE | | | | | | | | | | | | | | | | | | | | | |

