



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-008759	10JUN2014	DM	DM
	A1	REVISED PER PCN E-19-014559	17SEP2019	JA	IG



SCALE 3:4

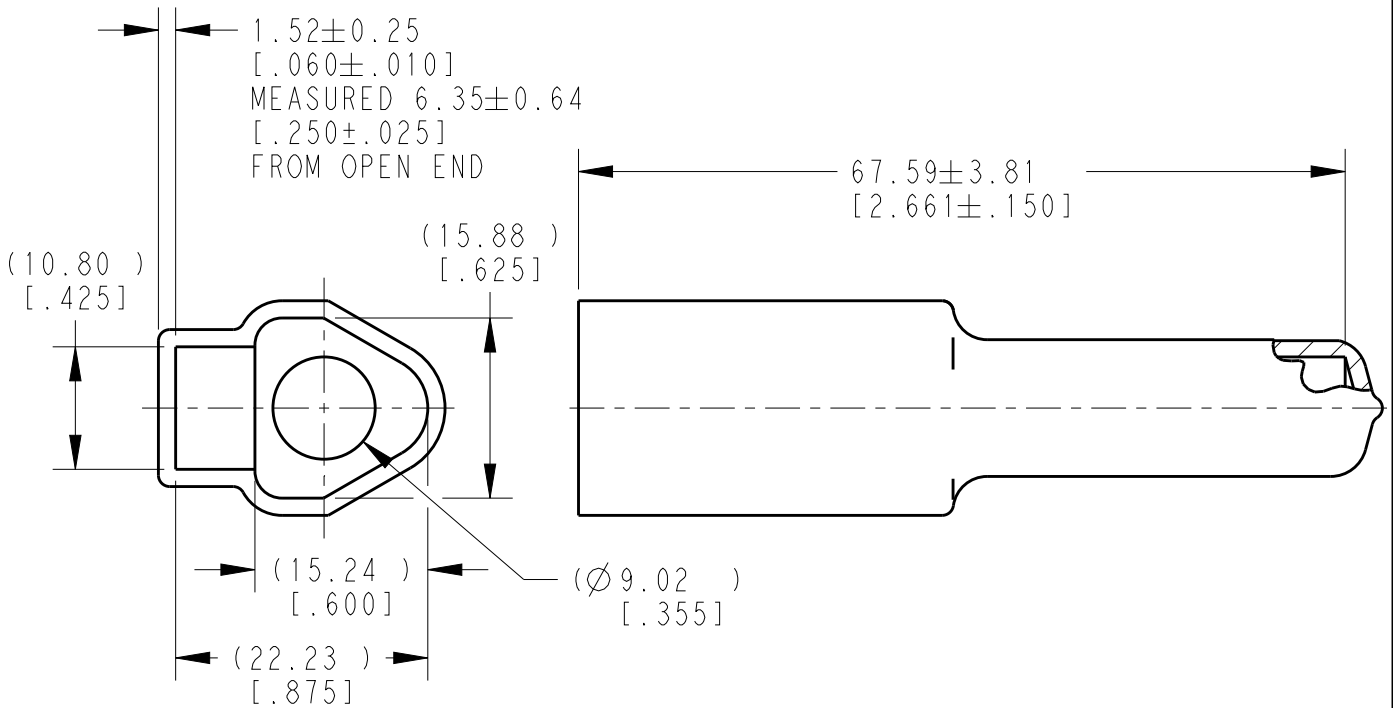

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F].

1. THIS PART IS USED ON DT06-3S PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT3S-BT-BK	DT3S-BT-BK

202019 RELEASED FOR PUBLICATION ALL RIGHTS RESERVED. THIS DRAWING IS UNPUBLISHED. BY TE CONNECTIVITY COPYRIGHT 2014

DIMENSIONS:	
mm	[INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±0.063 [.025]
4 PLC	±
ANGLES	±5° 30' 0"

DWN	D.MEYER	10JUN2014
CHK	R.MESSENGER	10JUN2014
APVD	D.MEYER	10JUN2014
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	5.47g	

MATERIAL	PVC	FINISH	BLACK
<b>TE</b> TE Connectivity			
NAME: BOOT, PLUG, 3 PIN DT SERIES			
SIZE	A 4	CAGE CODE	4AFU8
DRAWING NO	C=DT3S-BT-BK		RESTRICTED TO
CUSTOMER DRAWING		SCALE	3:2
		SHEET	1 OF 1
		REV	A1