



- LC fibre optic mating according to IEC 61754-20
- Connector pitch on panel:
Axis X = 27mm
Axis Y = 21mm
- Receptacle housing mating face according to IEC 61076-3-106-variant 04
- Screwing x2 M2.5 screws with 0.3N.m-0.5N.m

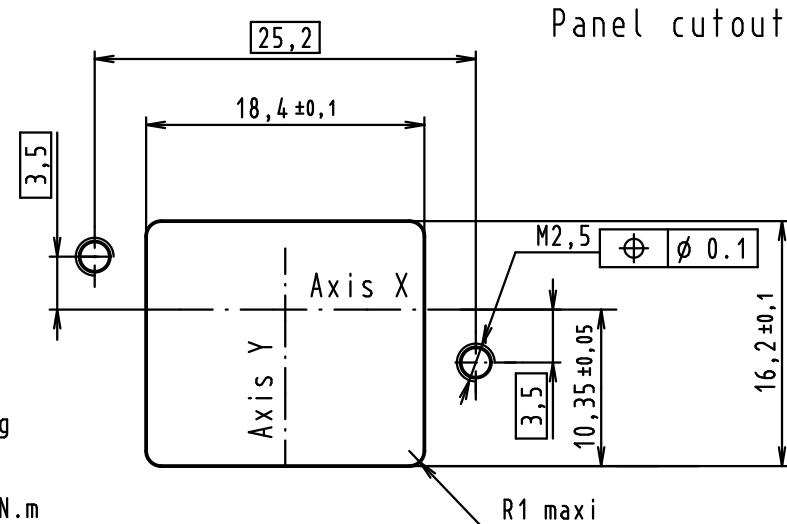

			Dot.	Name	 Push Pull LC IP67 receptacle with 2x M2,5 hole Multimode GOF and with 1.1mm thick flat seal	Maßstab/ Scale	
			Detail.	11-MAY-10		GB	2:1
			Insp.				
			Stand.				
36079	11-MAY-10	GB	HARTING EURL F-95972 Paris			TB09 57 442 0502 001	Blatt/ Page 1 / 1
Mod.	Dot.	Name				Sub.	

M2.5 washer
acc. to
EN ISO 7092

M2.5 screw
acc to DIN 912
or ISO 4762