



ISSUE NUMBER	
ORIGINAL	(1)

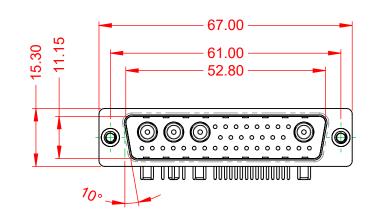




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:	20A (CURRENT
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTA
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

.XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

IT)

-55°C ~ 125°C

ACT

1000V AC rms



SW RI		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19
		CHECKED:	DATE:	
	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
CONTORIO CANADA		DRAWING NUMBER: 629-36W	4240-2T2	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-36W	4240-2T2	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

