

т	۵	П	m	0



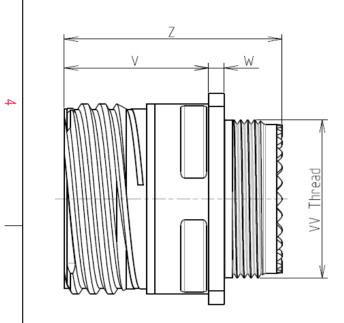

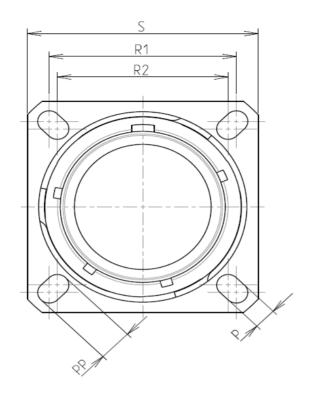

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
2	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8 $\mu m$ minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 48 hours			
	-Mass	: 30.91 g ± 10%			

8D 0

G

17

F

75

S

F

D L

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : D



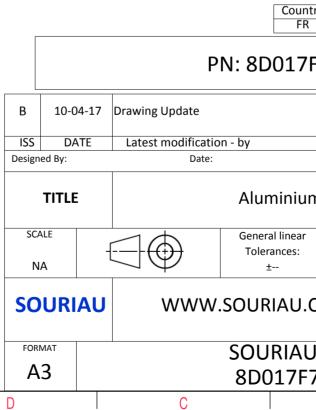

σ	₿   >				
				4	
AS EXAMPLE				3	
any non-conformin s which does not co er of the Parties or I ndation, technical n untry Jurisc FR 7F75SDL	mply with by a third part			2	
			MOD N°		
	CUSTOMER	DRAWING			
um Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1	
U DRG N°			SHEET		
F75SDL-C B		A	1/2	J	

ŗ	<b>工</b>	G	г П	m	D	0	
		Contact Layout					Panel Cuto
4		75 () ()			λ Σ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			<u> </u>	Max. thickness panel for receptacle: Ty	Ø⊺ Type 0: front m
ى						Dim ØA ØAA R1 ØT	A
	$\vdash$					SOURIAU shall not be li due to a use of the F	
27						the Specifications issued (professional red	l by either
					B 10-04-	PN: 8	3D017
					ISS DAT Designed By: TITLE	Date:	uminiu
<u> </u>					SCALE NA		neral linear blerances: ±
					FORMAT A3	SO	URIAU. URIAU 2017F
l	Н	G	F	E	D	C	

