



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

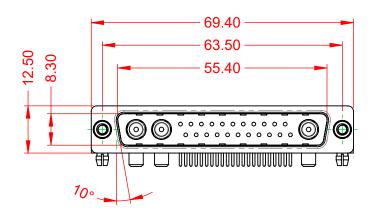



NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 40A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE: 10mΩ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



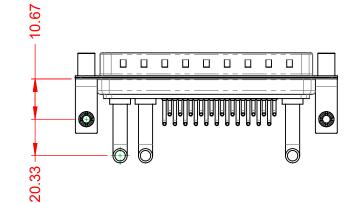

COMBINATION D-SUB




EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 COMBO ASSEMBLY				
	DRAWN: C.B	DATE: JAN. 01/2019			
	CHECKED:	DATE:			
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2			
ĺ	DRAWING NUMBER: 629-25W3250-4T5				

DRAWING NUMBER: 029-20113250-415 PART NUMBER: 629-25W3250-4T5



TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) **ORIGINAL**

00 2W2

2WK2

o€: 5W1

00000

3W3







00000 5W5





13W3










17W5






13W6







21W4









COMBINATION D-SUB



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	DRAWN: C.B		DATE:	JAN.	01/20	19
	CHECKED:		DATE:			
	SCALE: N.T.S		SHEET	2	OF	2
)	DRAWING NUMBER:	629-25W3250-4T5		ISSUE		

629-25W3250-4T5

629 COMBO ASSEMBLY

SW REFERENCE NO .:

PART NUMBER:

