

Specification Sheet


Part Number: 596-00831

Placards made with UV stable inks and materials tested to last up to 25 years, even in direct sun exposure.

Aggressive adhesive ensures strong bond, even on powder coated surfaces.

Meets or exceeds NEC & IFC standards for printed text, character height, color and outdoor UV stability.

Optional Paint Shields provide additional protection for pre-printed and variable data placards.

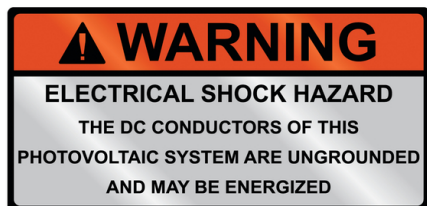

Metal Solar Placard, WARNING ELECTRICAL SHOCK..., 3.75" x 2.0", AA, Orange/Silver, 5/pkg

| | |
|----------------|-------------|
| Article Number | 596-00831 |
| Type | WDCCUM5 |
| Color | Orange (OG) |
| Quantity Per | pack |

| | |
|----------------------|--|
| Product Description | Metal Solar Placards offer maximum durability and ease in code compliance. Perfect for solar applications, a special process seals metallic particles under a clear anodized layer, which results in markings that have been tested and rated to last up to 25 years in outdoor use, even in direct sunlight. Markers are designed to meet the latest National Electrical Code (NEC 2014), with pre-printed warning or caution messaging that conforms to Article 690, as well as ANSI guidelines. Pre-printed placards may be more acceptable to some local Authorities Having Jurisdiction (AHJs), who may have a preference for placard-style identification. |
| Short Description | Metal Solar Placard, WARNING ELECTRICAL SHOCK..., 3.75" x 2.0", AA, Orange/Silver, 5/pkg |
| Global Part Name | WDCCUM5-AA-OG |
| Local Order Number 2 | Cross Reference = Paint Shield: 596-00793 |
| Length L (Imperial) | 3.75 |
| Length L (Metric) | 95.25 |
| Width W (Imperial) | 3.75 |
| Width W (Metric) | 95.25 |
| Height H (Imperial) | 2.0 |
| Height H (Metric) | 50.80 |
| Material | Anodized Aluminum (AA) |

| | |
|--------------------------------|--|
| Material Shortcut | AA |
| Adhesive | Ultra High Bond Permanent Acrylic Adhesive |
| Halogen Free | No |
| UV Resistant (Yes/No) | No |
| Adhesive Operating Temperature | from +50°F (from +10°C) |
| Operating Temperature | -40°F to +203°F (-40°C to +95°C) |
| Reach Compliant (Article 33) | Yes |
| ROHS Compliant | Yes |
| Certification/Specification | NEC2014 |
| Warranty (US) | Yes |
| Package Quantity (Imperial) | 5 |
| Package Quantity (Metric) | 5 |
| Customs Number | 8310000000 |
| Labels per Column | 1 |
| Labels per Row | 1 |

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)