



N-channel 650 V, 128 mΩ typ., 20 A MDmesh M9 Power MOSFET in a TO-220 package



TO-220



AM01476v1_tab



Features

| Order code | V_{DS} | $R_{DS(on)}$ max. | I_D |
|-------------|----------|-------------------|-------|
| STP65N150M9 | 650 V | 150 mΩ | 20 A |

- Worldwide best FOM $R_{DS(on)} * Q_g$ among silicon-based devices
- Higher V_{DSS} rating
- Higher dv/dt capability
- Excellent switching performance
- Easy to drive
- 100% avalanche tested
- Zener-protected

Applications

- High efficiency switching applications

Description

This N-channel Power MOSFET is based on the most innovative super-junction MDmesh M9 technology, suitable for medium/high voltage MOSFETs featuring very low $R_{DS(on)}$ per area. The silicon based M9 technology benefits from a multi-drain manufacturing process which allows an enhanced device structure. The resulting product has one of the lower on-resistance and reduced gate charge values, among all silicon based fast switching super-junction Power MOSFETs, making it particularly suitable for applications that require superior power density and outstanding efficiency.

Product status link

[STP65N150M9](#)

Product summary

| | |
|-------------------|-------------|
| Order code | STP65N150M9 |
| Marking | 65N150M9 |
| Package | TO-220 |
| Packing | Tube |

1 Electrical ratings

Table 1. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|----------------|---|------------|------|
| V_{GS} | Gate-source voltage | ±30 | V |
| I_D | Drain current (continuous) at $T_C = 25\text{ °C}$ | 20 | A |
| | Drain current (continuous) at $T_C = 100\text{ °C}$ | 12.5 | |
| $I_{DM}^{(1)}$ | Drain current (pulsed) | 60 | A |
| P_{TOT} | Total power dissipation at $T_C = 25\text{ °C}$ | 140 | W |
| $dv/dt^{(2)}$ | Peak diode recovery voltage slope | 50 | V/ns |
| $di/dt^{(2)}$ | Peak diode recovery current slope | 900 | A/μs |
| $dv/dt^{(3)}$ | MOSFET dv/dt ruggedness | 120 | V/ns |
| T_{stg} | Storage temperature range | -55 to 150 | °C |
| T_J | Operating junction temperature range | | °C |

1. Pulse width is limited by safe operating area.
2. $I_{SD} \leq 10\text{ A}$, $V_{DS} (\text{peak}) < V_{(BR)DSS}$, $V_{DD} = 400\text{ V}$.
3. $V_{DS} (\text{peak}) < V_{(BR)DSS}$, $V_{DD} \leq 400\text{ V}$.

Table 2. Thermal data

| Symbol | Parameter | Value | Unit |
|------------|---|-------|------|
| R_{thJC} | Thermal resistance, junction-to-case | 0.89 | °C/W |
| R_{thJA} | Thermal resistance, junction-to-ambient | 62.5 | °C/W |

Table 3. Avalanche characteristics

| Symbol | Parameter | Value | Unit |
|----------|--|-------|------|
| I_{AR} | Avalanche current, repetitive or non-repetitive (pulse width limited by T_J max.) | 4 | A |
| E_{AS} | Single pulse avalanche energy (starting $T_J = 25\text{ °C}$, $I_D = I_{AR}$, $V_{DD} = 50\text{ V}$) | 200 | mJ |

2 Electrical characteristics

$T_C = 25\text{ °C}$ unless otherwise specified.

Table 4. On/off states

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|---------------|-----------------------------------|---|------|------|---------|---------------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage | $V_{GS} = 0\text{ V}$, $I_D = 1\text{ mA}$ | 650 | | | V |
| I_{DSS} | Zero gate voltage drain current | $V_{GS} = 0\text{ V}$, $V_{DS} = 650\text{ V}$ | | | 1 | μA |
| | | $V_{GS} = 0\text{ V}$, $V_{DS} = 650\text{ V}$, $T_C = 125\text{ °C}^{(1)}$ | | | 200 | |
| I_{GSS} | Gate-body leakage current | $V_{DS} = 0\text{ V}$, $V_{GS} = \pm 25\text{ V}$ | | | ± 5 | μA |
| $V_{GS(th)}$ | Gate threshold voltage | $V_{DS} = V_{GS}$, $I_D = 250\text{ }\mu\text{A}$ | 3.2 | 3.7 | 4.2 | V |
| $R_{DS(on)}$ | Static drain-source on-resistance | $V_{GS} = 10\text{ V}$, $I_D = 10\text{ A}$ | | 128 | 150 | m Ω |

1. Specified by design, not tested in production.

Table 5. Dynamic

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|----------------------------|-------------------------------|--|------|------|------|----------|
| C_{iss} | Input capacitance | $V_{DS} = 400\text{ V}$, $f = 1\text{ MHz}$, $V_{GS} = 0\text{ V}$ | - | 1240 | - | pF |
| C_{oss} | Output capacitance | | - | 25 | - | pF |
| $C_{oss\text{ eq.}}^{(1)}$ | Equivalent output capacitance | $V_{DS} = 0\text{ to }400\text{ V}$, $V_{GS} = 0\text{ V}$ | - | 290 | - | pF |
| R_G | Intrinsic gate resistance | $f = 1\text{ MHz}$, $I_D = 0\text{ A}$ | - | 2 | - | Ω |
| Q_g | Total gate charge | $V_{DD} = 400\text{ V}$, $I_D = 10\text{ A}$, $V_{GS} = 0\text{ to }10\text{ V}$ (see Figure 15. Test circuit for gate charge behavior) | - | 32 | - | nC |
| Q_{gs} | Gate-source charge | | - | 7 | - | nC |
| Q_{gd} | Gate-drain charge | | - | 15 | - | nC |

1. $C_{oss\text{ eq.}}$ is defined as a constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to stated value.

Table 6. Switching times

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|--------------------|---|------|------|------|------|
| $t_{d(v)}$ | Voltage delay time | $V_{DD} = 400\text{ V}$, $I_D = 10\text{ A}$, $R_G = 4.7\text{ }\Omega$, $V_{GS} = 10\text{ V}$ | - | 8 | - | ns |
| $t_{r(v)}$ | Voltage rise time | | - | 5 | - | ns |
| $t_{f(i)}$ | Current fall time | (see Figure 16. Test circuit for inductive load switching and diode recovery times and Figure 17. Turn-off switching time waveform on inductive load) | - | 7 | - | ns |
| $t_{c(off)}$ | Crossing time off | | - | 40 | - | ns |
| $t_{d(i)}$ | Current delay time | $V_{DD} = 400\text{ V}$, $I_D = 10\text{ A}$, $R_G = 4.7\text{ }\Omega$, $V_{GS} = 10\text{ V}$ | - | 14 | - | ns |
| $t_{r(i)}$ | Current rise time | | - | 4 | - | ns |
| $t_{f(v)}$ | Voltage fall time | (see Figure 16. Test circuit for inductive load switching and diode recovery times and Figure 18. Turn-on switching time waveform on inductive load) | - | 10 | - | ns |
| $t_{c(on)}$ | Crossing time on | | - | 12 | - | ns |

Table 7. Source-drain diode

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------|-------------------------------|---|------|------|------|---------------|
| I_{SD} | Source-drain current | | - | | 20 | A |
| $I_{SDM}^{(1)}$ | Source-drain current (pulsed) | | - | | 60 | A |
| $V_{SD}^{(2)}$ | Forward on voltage | $I_{SD} = 20\text{ A}$, $V_{GS} = 0\text{ V}$ | - | | 1.6 | V |
| t_{rr} | Reverse recovery time | $I_{SD} = 20\text{ A}$, $di/dt = 100\text{ A}/\mu\text{s}$, | - | 192 | | ns |
| Q_{rr} | Reverse recovery charge | $V_{DD} = 100\text{ V}$ | - | 1.8 | | μC |
| I_{RRM} | Reverse recovery current | (see Figure 16. Test circuit for inductive load switching and diode recovery times) | - | 17.5 | | A |
| t_{rr} | Reverse recovery time | $I_{SD} = 20\text{ A}$, $di/dt = 100\text{ A}/\mu\text{s}$, | - | 280 | | ns |
| Q_{rr} | Reverse recovery charge | $V_{DD} = 100\text{ V}$, $T_J = 150\text{ }^\circ\text{C}$ | - | 3.6 | | μC |
| I_{RRM} | Reverse recovery current | (see Figure 16. Test circuit for inductive load switching and diode recovery times) | - | 20.5 | | A |

1. Pulse width is limited by safe operating area.
2. Pulsed: pulse duration = 300 μs , duty cycle 1.5%.

2.1 Electrical characteristics (curves)

Figure 1. Safe operating area

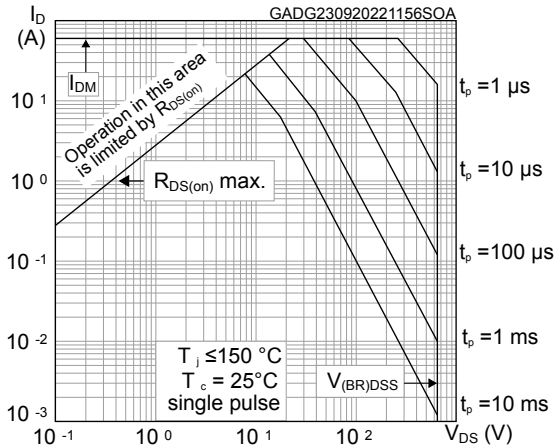


Figure 2. Maximum transient thermal impedance

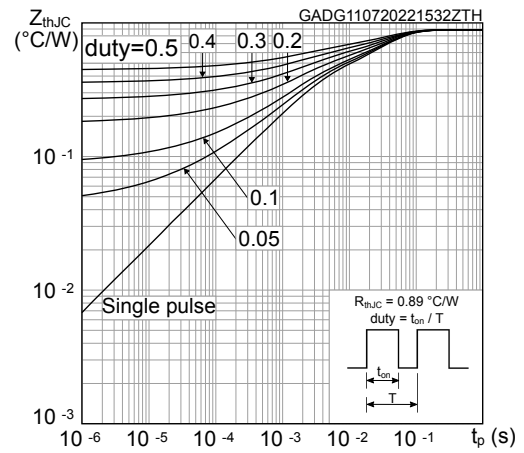


Figure 3. Typical output characteristics

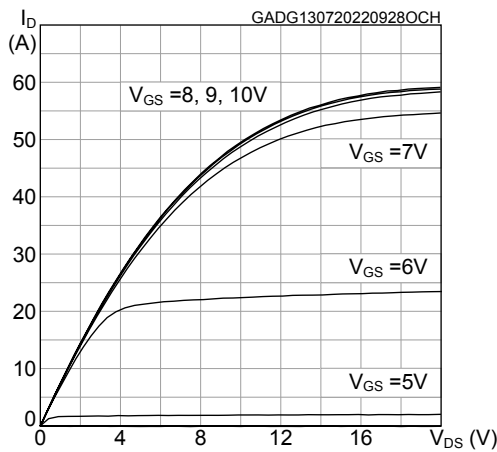


Figure 4. Typical transfer characteristics

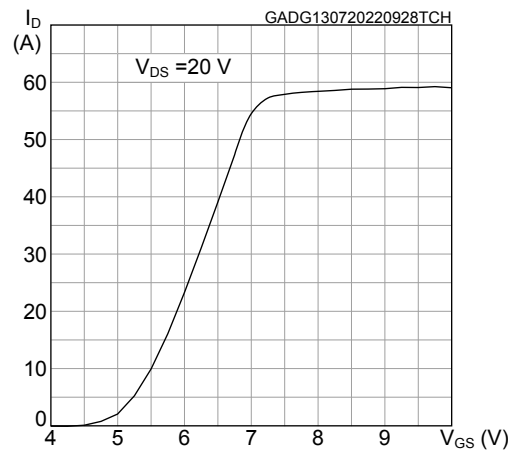


Figure 5. Typical gate charge characteristics

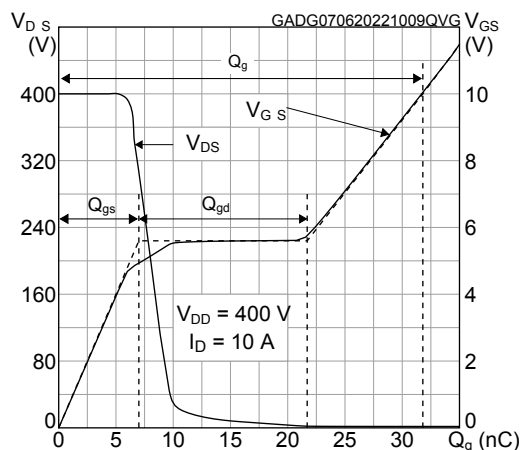


Figure 6. Typical capacitance characteristics

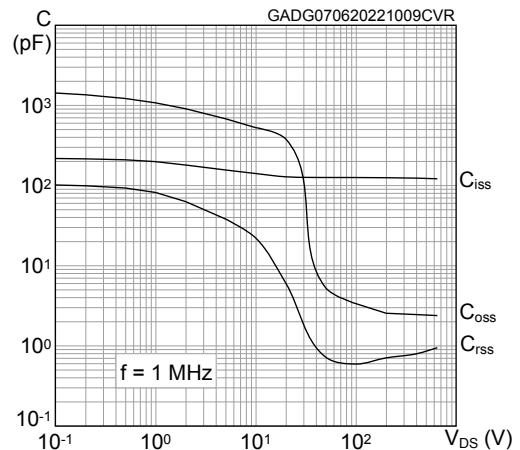


Figure 7. Typical drain-source on-resistance

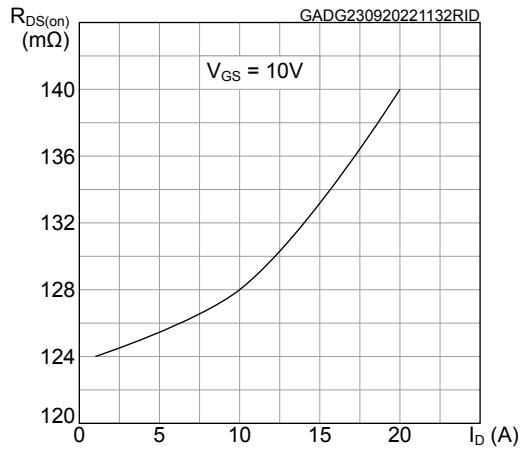


Figure 8. Normalized on-resistance vs temperature

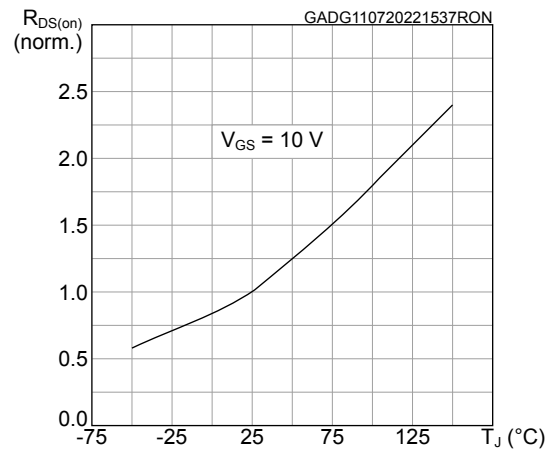


Figure 9. Normalized gate threshold vs temperature

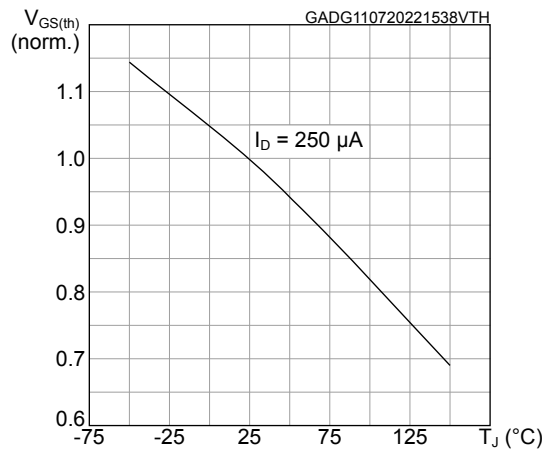


Figure 10. Normalized breakdown voltage vs temperature

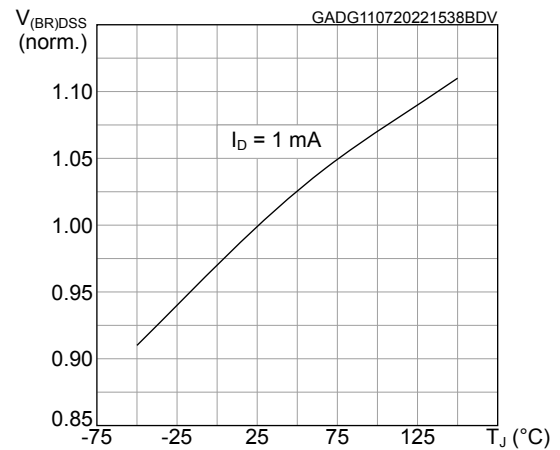


Figure 11. Typical reverse diode forward characteristics



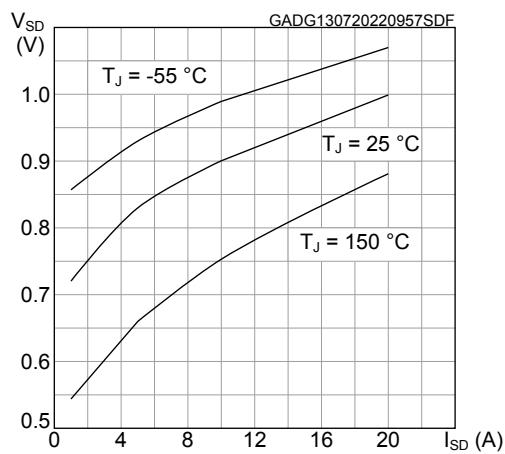



Figure 12. Typical output capacitance stored energy

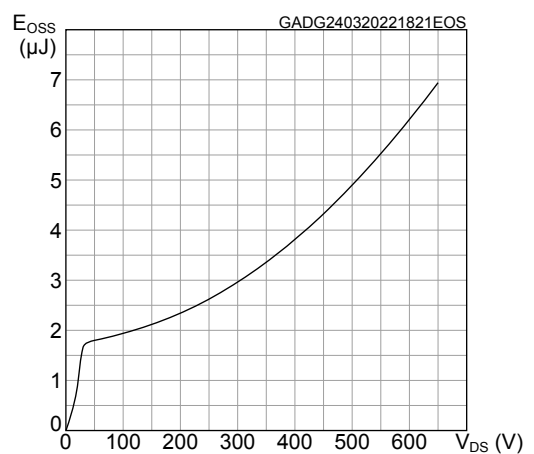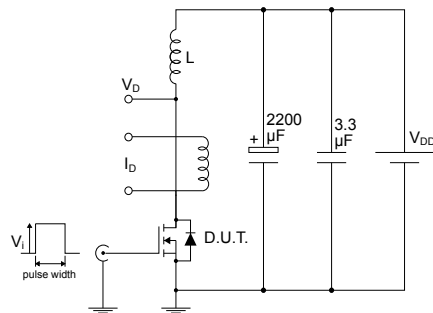


3 Test circuits

Figure 13. Unclamped inductive load test circuit


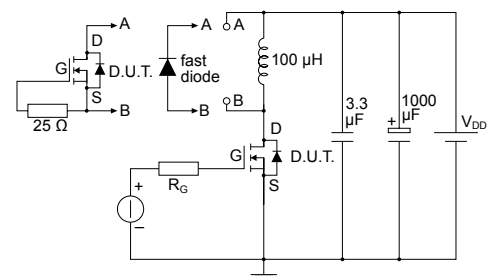
AM01471v1

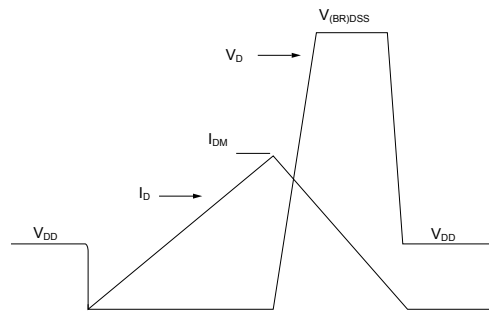Figure 14. Unclamped inductive waveform


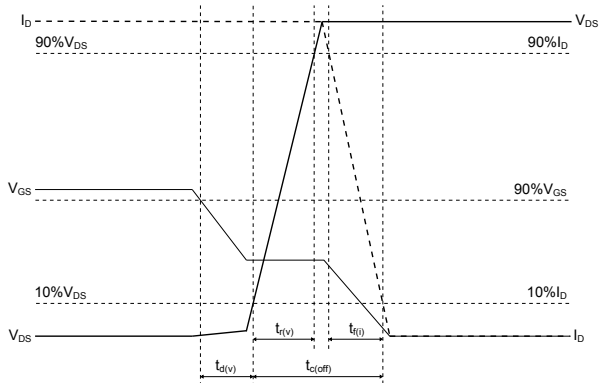
AM01472v1

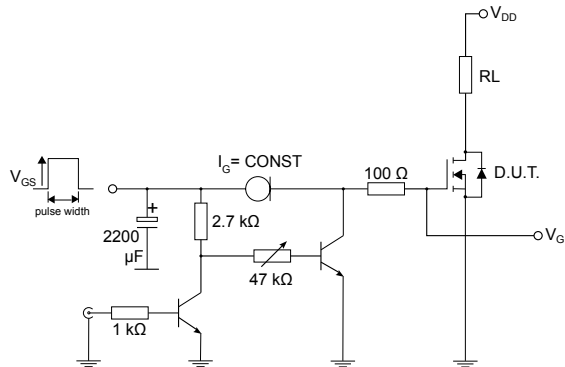Figure 15. Test circuit for gate charge behavior


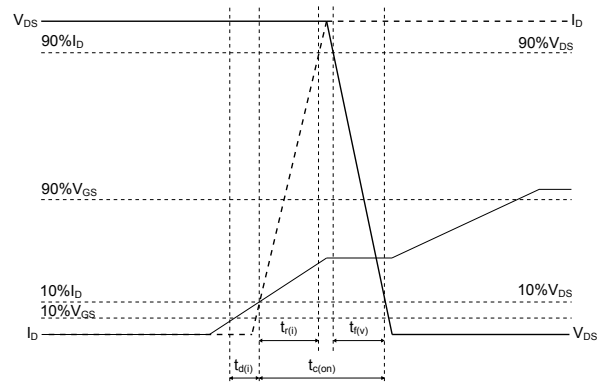
AM01469v10

Figure 16. Test circuit for inductive load switching and diode recovery times


AM01470v1

Figure 17. Turn-off switching time waveform on inductive load


AM05540v3

Figure 18. Turn-on switching time waveform on inductive load


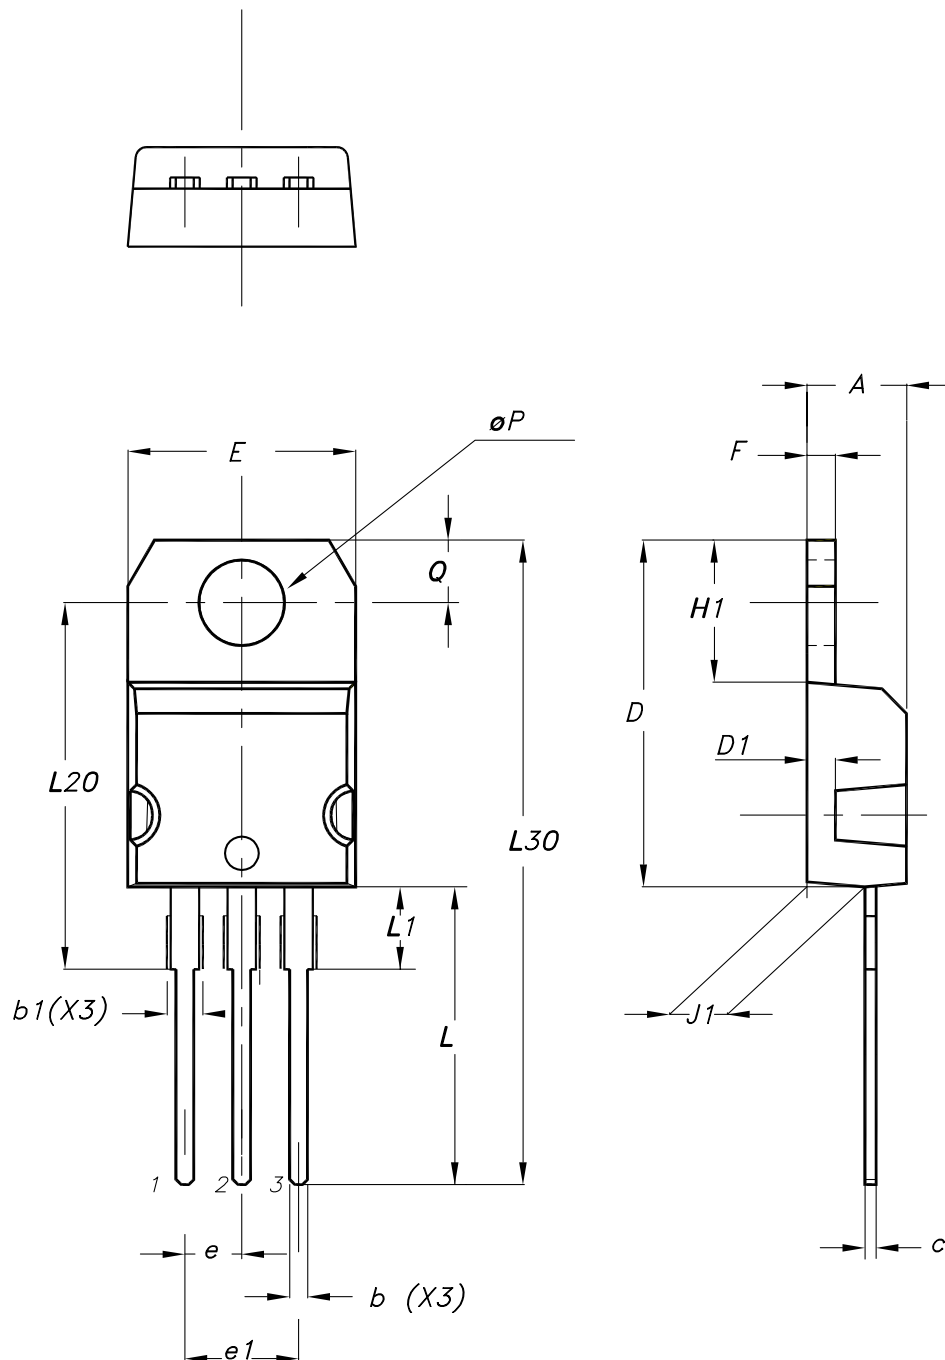
GADG241120211046SWTW

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

4.1 TO-220 type A package information

Figure 19. TO-220 type A package outline



0015988_typeA_Rev_23

Table 8. TO-220 type A package mechanical data

| Dim. | mm | | |
|---------------|-------|-------|-------|
| | Min. | Typ. | Max. |
| A | 4.40 | | 4.60 |
| b | 0.61 | | 0.88 |
| b1 | 1.14 | | 1.55 |
| c | 0.48 | | 0.70 |
| D | 15.25 | | 15.75 |
| D1 | | 1.27 | |
| E | 10.00 | | 10.40 |
| e | 2.40 | | 2.70 |
| e1 | 4.95 | | 5.15 |
| F | 1.23 | | 1.32 |
| H1 | 6.20 | | 6.60 |
| J1 | 2.40 | | 2.72 |
| L | 13.00 | | 14.00 |
| L1 | 3.50 | | 3.93 |
| L20 | | 16.40 | |
| L30 | | 28.90 | |
| øP | 3.75 | | 3.85 |
| Q | 2.65 | | 2.95 |
| Slug flatness | | 0.03 | 0.10 |

Revision history

Table 9. Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 19-Jul-2022 | 1 | First release. |
| 01-Dec-2022 | 2 | Updated <i>Table 1. Absolute maximum ratings.</i> Updated <i>Table 5. Dynamic.</i> Updated <i>Table 7. Source-drain diode.</i> Updated <i>Figure 1. Safe operating area.</i> Updated <i>Figure 3. Typical output characteristics.</i> Updated <i>Figure 4. Typical transfer characteristics.</i> Updated <i>Figure 5. Typical gate charge characteristics.</i> Updated <i>Figure 6. Typical capacitance characteristics.</i> Updated <i>Figure 7. Typical drain-source on-resistance.</i> Updated <i>Figure 11. Typical reverse diode forward characteristics.</i> |
| 22-Feb-2023 | 3 | Updated <i>Table 1. Absolute maximum ratings.</i> Updated <i>Table 4. On/off states.</i> |

Contents

| | | |
|------------|--|-----------|
| 1 | Electrical ratings | 2 |
| 2 | Electrical characteristics | 3 |
| 2.1 | Electrical characteristics (curves) | 5 |
| 3 | Test circuits | 7 |
| 4 | Package information | 8 |
| 4.1 | TO-220 type A package information | 8 |
| | Revision history | 10 |

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2023 STMicroelectronics – All rights reserved