

Fiber optic - HS LC-H-D3/ R2XC1-5,08 - 2202315

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)

Your advantages

- ☑ Resistance to ESD



Key Commercial Data

Packing unit	100 pc
Minimum order quantity	100 pc
GTIN	4 055626 049960
GTIN	4055626049960

Technical data

Product properties

Brief article description	Fiber optic	
Туре	HS LC-H-D3/ R2XC1-5,08	
Order No.	2202315	
Туре	passive, rigid	
Alignment	Horizontal	
Head form	Round, spherical emission surface	

Dimensions

Caption	Details on positioning inside the electronics housing can be found in the download area under "Design-In"
Pitch	5.08 mm
Diameter	3 mm



Fiber optic - HS LC-H-D3/ R2XC1-5,08 - 2202315

Technical data

Di	m	eı	ารi	ıo	ทร


Hole diameter	1.5 mm			
Material specifications				
Material	PC			
Color (RAL)	transparent			
Ambient conditions				
Ambient temperature (operation)	-40 °C 85 °C			
General information				
Type of note	Assembly instruction:			
Note	Refer to the data sheet for the range in the download area.			
Packaging details				
Pieces per package	100			
Denomination packing units	Pcs.			
Standards and Regulations				
Flammability rating according to UL 94	НВ			
Environmental Product Compliance				
China RoHS	Environmentally friendly use period: unlimited = EFUP-e			
	No hazardous substances above threshold values			

Drawings



Fiber optic - HS LC-H-D3/ R2XC1-5,08 - 2202315

Dimensional drawing

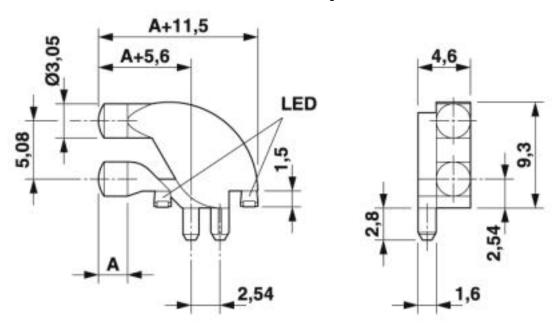

Details on positioning inside the electronics housing can be found in the download area under "Design-In"

Approvals Approvals Approvals EAC Ex Approvals Approval details EAC EAC B.01742



Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com