



R	\square
$/ \mathcal{A}_{\mathbf{r}}$	ЦЦ

ISSUE NUMBER	
ORIGINAL	1

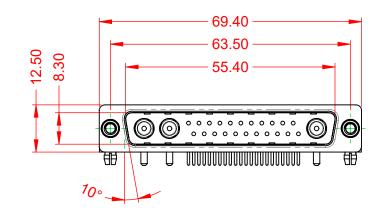




.XX ±0.13 .XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

WITHSTANDING VOLTAGE:

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20 ⁻	19
			CHECKED:	DATE:	
	EDAC INC	ARE THE PROPERTY OF EDAC INC.,AND ITO, ONTARIO SHALL NOT BE REPRODUCED,OR COPIED CANADA OR USED AS THE BASIS FOR THE	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-25W	3640-1TD	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-25W	3640-1TD	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

