


Steward

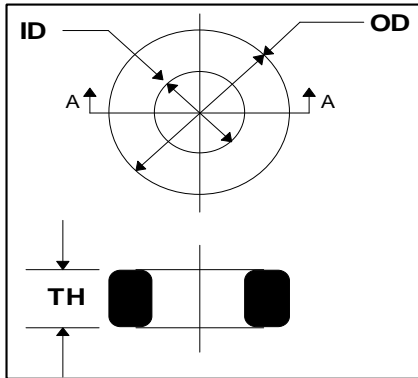

CORE DIMENSIONS		35T0394-000			
UNCOATED CORE					
		MM	INCHES	MM	INCHES
OD	10.00	(.394)	±	.25	(.010)
ID	5.00	(.197)	±	.25	(.010)
TH	5.00	(.197)	±	.13	(.005)
EPOXY COATING		35T0394-00H			
OD	10.15	(.400)	±	.41	(.016)
ID	4.85	(.191)	±	.41	(.016)
TH	5.15	(.203)	±	.28	(.011)

WEIGHT / K 1.4358 KGS 3.1654 LBS
 INITIAL PERMEABILITY 5000

ROOM TEMPERATURE ELECTRICAL SPECIFICATION									
	MIN. TOL.	MIN. (μH)	NOM. (μH)	MAX. (μH)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	URNS
L1-1T	-20.0%	2.77	3.47	4.16	20.0%	100	5.33	10	1
L1-10T	-20.0%	277.3	346.6	415.9	20.0%	100	53.3	10	10
Q		10							

COATING SPECIFICATIONS			
TYPE	Max. Coating (mm / mils.)	Min. DLB VAC	TEST FORCE (LB)
Epoxy	(0.1524 / 6.0)	1000	.91

NOTES:



Rev	Description	Date	INT
A	Original Draft	1/5/1998	IS
B	BROCHURE 58 REV 2 12/2004, Revised Template	5/15/2006	WMM

Date:5/15/2006	DWG # 35T0394-00H-B	Rev:
Drawn By: WMM	Title # 35T0394-00H	B

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT