

т	۵ D	н <b>т</b>		0



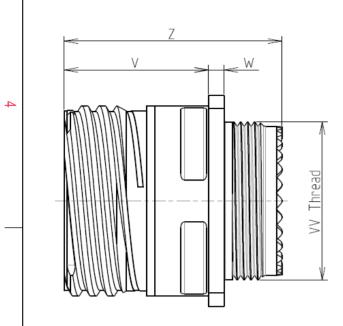

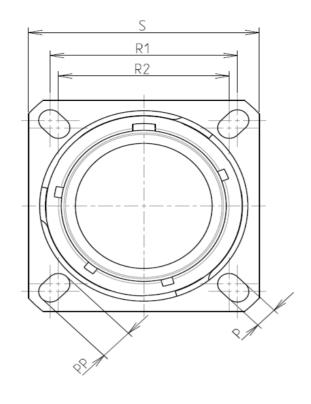

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	<ul> <li>-65°C to +200°C</li> </ul>			
	-Salt Spray	: 48 hours			
	-Mass	: 13.35 g ± 10%			

8D 0

G

11

F

01

S

F

B L

Dim Nominal		
Р	3.25±0.2	
РР	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	


Delivered W/O Contacts


CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : B** 



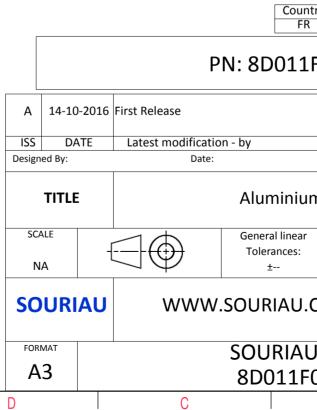

σ		A			
R				4	
AS EXAMPLE				3	
r any non-conformit s which does not co er of the Parties or I ndation, technical n	mply with by a third party	y			
Intry Jurisc	liction & Contr Not Listed	rol List		2	
			MOD N°		
um Receptac	customer drawing n Receptacle 8D series				
ar	NPRDS / PROJECT 859				
J.COM	This document is the property of				
U DRG N° F01SBL-C	I		SHEET 1/2		
В		А		J	

	Ξ	۵	<u>п</u>	m		0
		Contact Layout				Panel Cuto
4		01			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y	]		α ₩	Ø
ى ى	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D011
					ISS DATE Designed By: TITLE	Latest modification - by Date: Aluminiur
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT	U WWW.SOURIAU. SOURIAU
					A3	8D011F
	Н	G	F	E	D	C

