


ם ד <u>ה</u>	IT	m	0

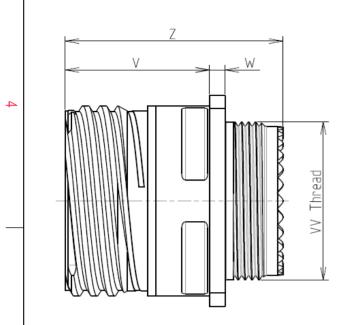

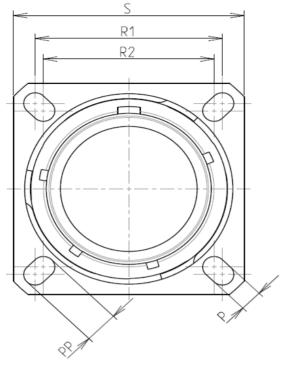



Keying Shown as example

S A

11

F

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 19

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	u contacts and Accessories
-Temperature Range	: -65°C to +175°C
-Salt Spray	: 500 hours

: 44.66 g ± 10%

8D 0

G

19

-

W

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	29.36	
R2	26.97	
S	36.5±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M28x1-6g	

LAYOUT SHOWN AS EXAMPLE	
Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 29.36 R2 26.97 S 36.5±0.3 V 20.83+0/-1.25 W 2.1/2.5	not comply with es or by a third party
Z 31.5 Max FR	Not Listed
HREAD M28x1-6g PN: 8D019W11SA	A
A 02-11-2016 First Release	
ISS DATE Latest modification - by Designed By: Date:	CUSTOMER DRAWING
TITLE Aluminium Recept	
SCALE NA General linear Tolerances: ±	NPRDS / PROJECT 859
ORIENTATION : A CONTACT TYPE : SOCKET(500 Matings)	This document is the property of SOURIAU it must not be reproduced or communicated without permission
CONTACT LAYOUT : 19-11 FORMAT A3 SOURIAU DRG N 8D019W11SA-0	
E D C B	

