


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.





ISSUE NUMBER ORIGINAL



TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13



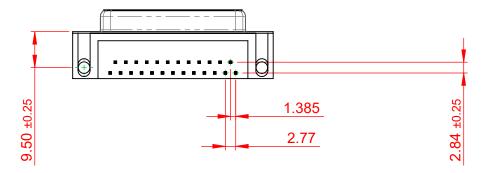

## NOTES:

MATERIAL:

**HOUSING:** THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

**3A PER CONTACT CURRENT RATING:** 

**CONTACT RESISTANCE:** 25mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

## 622 SERIES D-SUB CONNECTOR



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 622 ASSEMBLY	
DRAWN: C.B	DATE: AUG. 01/2018
CHECKED:	DATE:
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 1
DDAWING NUMBER: 622 025 660 511	

DRAWING NUMBER: 622-025-660-511 ISSUE PART NUMBER: 622-025-660-511

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.