





Data sheet | Item number: 756-5111/030-100

Sensor/Actuator cable; M8 plug; straight; 3-pole; Length: 10 m

www.wago.com/756-5111/030-100

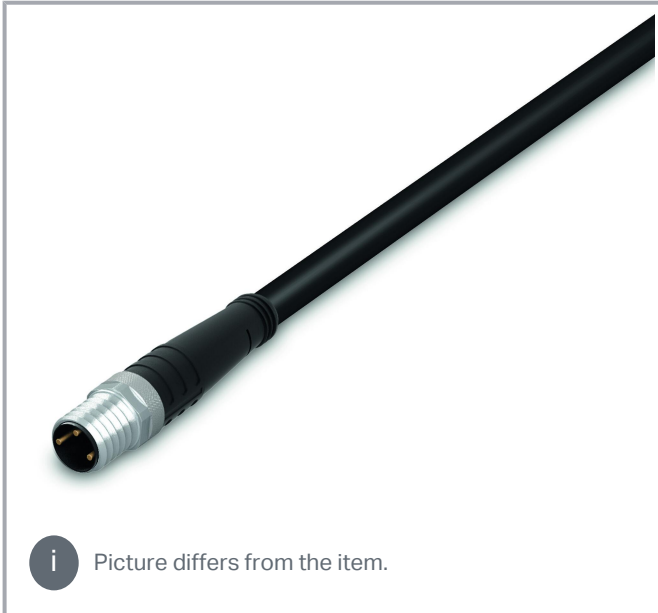

 Picture differs from the item.

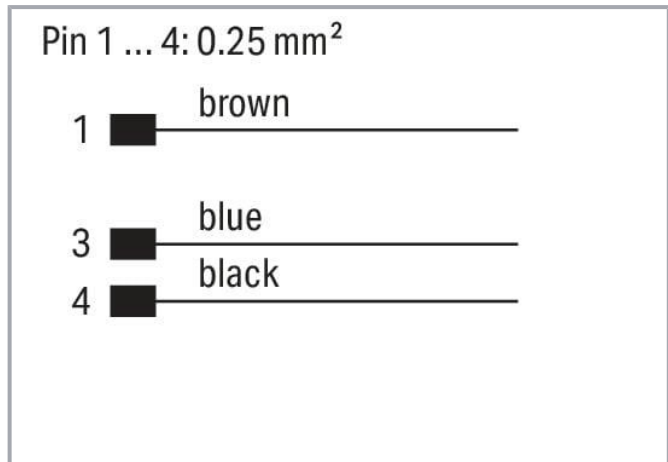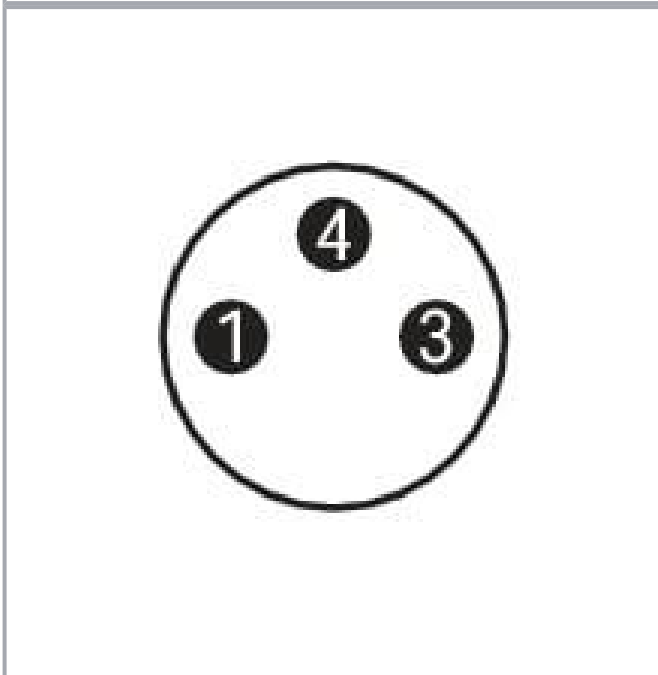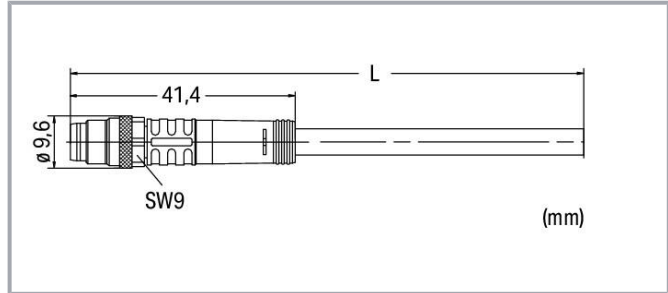

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Data

Technical data

General

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	10 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M8 plug - free end
Cable connection direction to mating direction	0°
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454941932
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	27eac7d3-82ff-4494-802b-e15cce866d97
SCIP notification number (Belgium)	5b469b7d-bfcb-46ad-bee3-9c53b7eb7985
SCIP notification number (Bulgaria)	520f57e7-5317-4df6-8cb8-ba8ed4ca131a
SCIP notification number (Czech Republic)	9aa7fa3e-caa4-420e-b750-2c3f6e05e96b
SCIP notification number (Denmark)	9de47f38-4a60-4f18-a818-d855123886da
SCIP notification number (Finland)	69971b32-c8a4-410a-bf8a-2c2c5de13349
SCIP notification number (France)	978b530b-361e-4144-9f3b-284714cbb37a

Subject to changes. Please also observe the further product documentation!


WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

SCIP notification number (Germany)	7044906c-7dfd-48a4-b782-3b27f6b7d20f
SCIP notification number (Hungary)	6609bb1f-e74a-495b-9015-f15c8741028e
SCIP notification number (Italy)	22b26c15-b736-46dc-a561-06d262d93baf
SCIP notification number (Netherlands)	422f8eda-f38d-4418-98cd-cf34aad9c994
SCIP notification number (Poland)	cc1fd63e-312e-4ad8-aef6-1f1eaa7e40b8
SCIP notification number (Romania)	bdecba1d-e967-4f4f-ba9d-d6e9be9e0af1
SCIP notification number (Sweden)	a9f3941f-b551-4e9c-ad16-f0a2db7b7f8f

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5111/030-100 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5111/030-100 doc - Datei	2017 Sep 20	doc 26.1 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5111/030-100	URL	Download
WSCAD Universe 756-5111/030-100	URL	Download

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5111/030-100
Sensor/Actuator cable; M8 plug; straight; 3-pole; Length: 10 m

[URL](#)

[Download](#)

Installation Notes

Subject to changes. Please also observe the further product documentation!