



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/05/17	E	DIM. 9.2 WAS 10.54 ADDED DIM. 11.9, Ø3.10	T.B.	B.S.	
05/12/17	F	DIM. 57.50 WAS 57.40	T.B.	B.S.	
05/19/18	G	Dim. 12.80 WAS 15.80	T.B.	B.S.	
02/13/19	H	Dim. 0.80 WAS 0.90 Dim. 050 WAS 0.51	T.B.	B.S.	
03/06/19	J	Updated to "ROHS Compliant"	T.B.	B.S.	

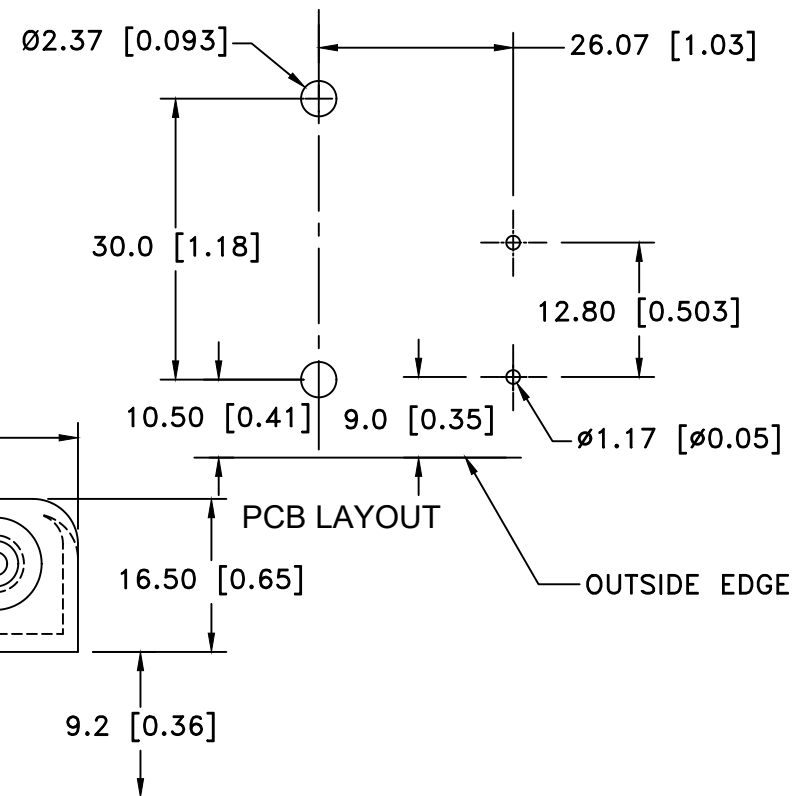

NOTES:

1. MATERIAL:

HOUSING : POLYPROPYLENE
 FLAMMABILITY RATING: UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C TO +100°C
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: SPRING STEEL, NICKEL PLATED.
 PC PINS: STEEL, NICKEL PLATED
 CONTACT RESISTANCE: UNDER 50m Ω FOR ± CONTACTS PER
 EIA-540J000
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title THREE "AA" CELL HOLDER		
Angular ± 3°	Date 03/06/19	Drawing Number BC3AAPC	