
# DTCE04-1-4P-E003 - ACTIVE

#### DEUTSCH | DEUTSCH DT, DEUTSCH DTHD

TE Internal #: DTCE04-1-4P-E003 Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid View on TE.com >



Connectors > Automotive Connectors > Automotive Housings

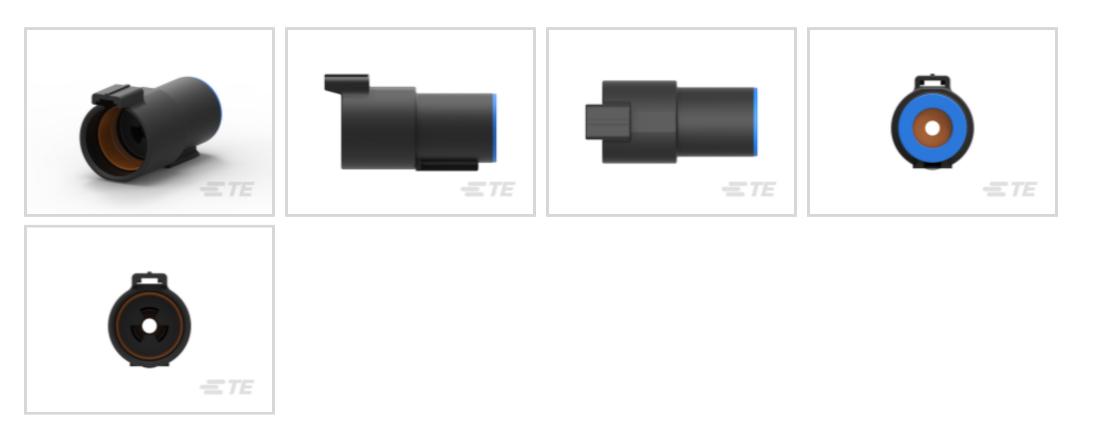

Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 5.72 mm [.225 in ]

Connector System: Wire-to-Wire

Number of Positions: 1

Sealable: Yes

### Features

Product Type Features

Connector Shape	Circular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	1
Number of Rows	0
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	Size 4
Contact Type	Pin
Mating Pin Diameter	5.72 mm[.225 in]
Contact Current Rating (Max)	100 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	With
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PEI (Polyetherimide)
Dimensions	
Connector Height	29.72 mm[1.17 in]

Product Width	26.54 mm[1.045 in]
Product Length	55.07 mm[2.168 in]
Accepts Insulation Diameter Range	6.63 – 10.67 mm[.261 – .42 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Degree of Protection	Not Tested
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	500
Packaging Method	Box
Other	

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### **Compatible Parts**




Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



 TE Part # 4060-006-04141
 TE Part # 4060-005-04141
 TE Part # 4011-201-0400
 TE Part # 4060-009-04141


 PIN, SOLID, SIZE 4, 6AWG, NI
 TE Part # 4011-201-0400
 EXT TOOL, SIZE 4, 4-6 AWG, CE, GRY
 TE Part # 4060-009-04141

# Also in the Series | DEUTSCH DT

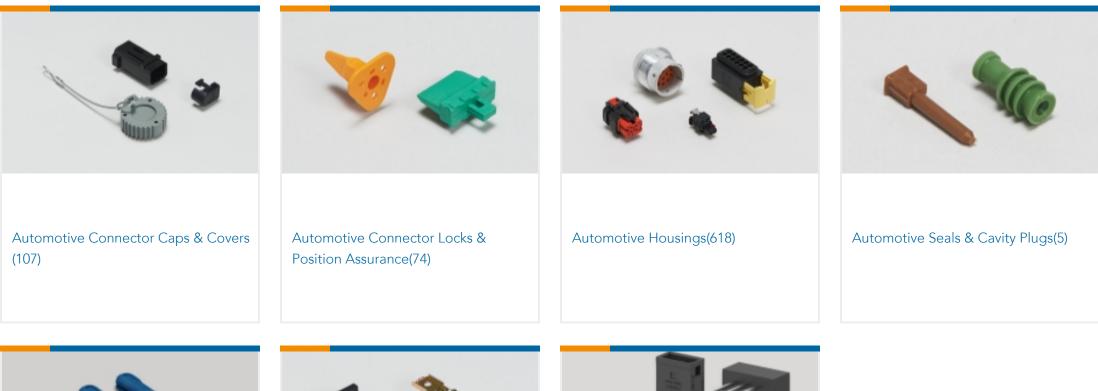








Insertion & Extraction Tools(3)

Other Automotive Connector Accessories(16) PCB Headers & Receptacles(102)


## Also in the Series | DEUTSCH DTHD

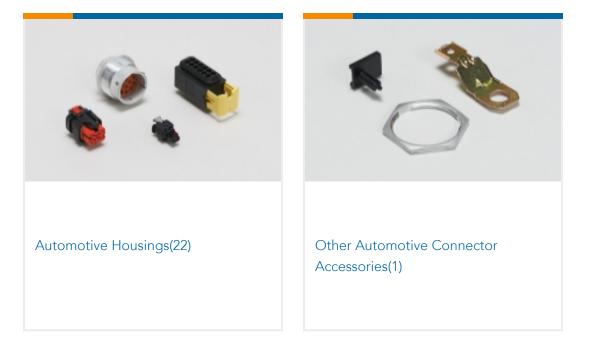

Customers Also Bought

Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



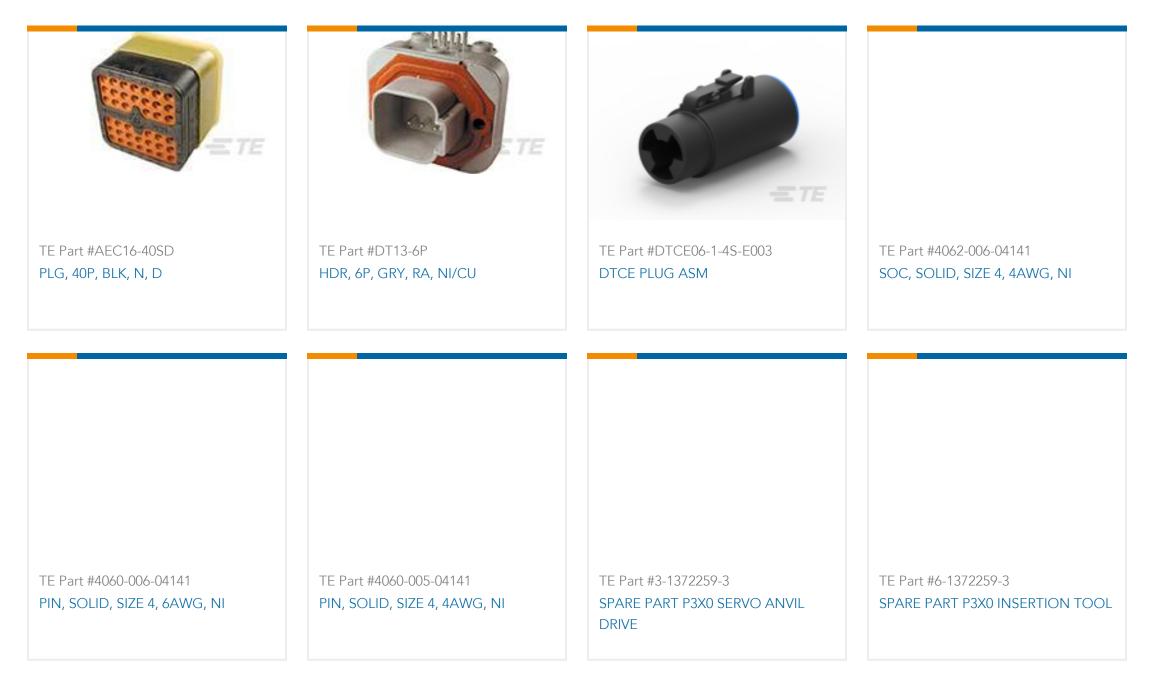



TE Part #7001003-ZZ RESISTOR ASSMB PL TE Part #171363-7 MULTI INTERLOCK CONNECT HSG

### Documents

Product Drawings

DTCE RECP ASM

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_DTCE04-1-4P-E003\_99\_c-dtce04-1-4p-e003-99.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_DTCE04-1-4P-E003\_99\_c-dtce04-1-4p-e003-99.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_DTCE04-1-4P-E003\_99\_c-dtce04-1-4p-e003-99.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

#### Datasheets & Catalog Pages

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



#### CONNECTOR SELECTOR

English

Product Environmental Compliance

**Product Compliance** 

English

**Product Compliance** 

English

Agency Approvals UL Report

English