



**Electrical Specifications**

**Center Frequency:** 10560 MHz  
**3dB Bandwidth:** 800 MHz  
**Pass Band:** 10160-10960 MHz  
**Insertion Loss:** 1.0 dB Max  
**Return Loss:** 15 dB Min  
**Rejection:** >20 dB @ 9960 MHz  
               >35 dB @ 9730 MHz  
               >20 dB @ 11160 MHz  
               >35 dB @ 11360 MHz  
**Power:** 10 W Max


**Mechanical**

**Connector Type:** RF Pins  
**Dimensions:** 1.83 x 0.47 x 0.34 Inches

**Environmental**


**Operating Temperature:** -40 to +85° C  
**Storage Temperature:** -50 to +95° C

**Outline Drawing:**

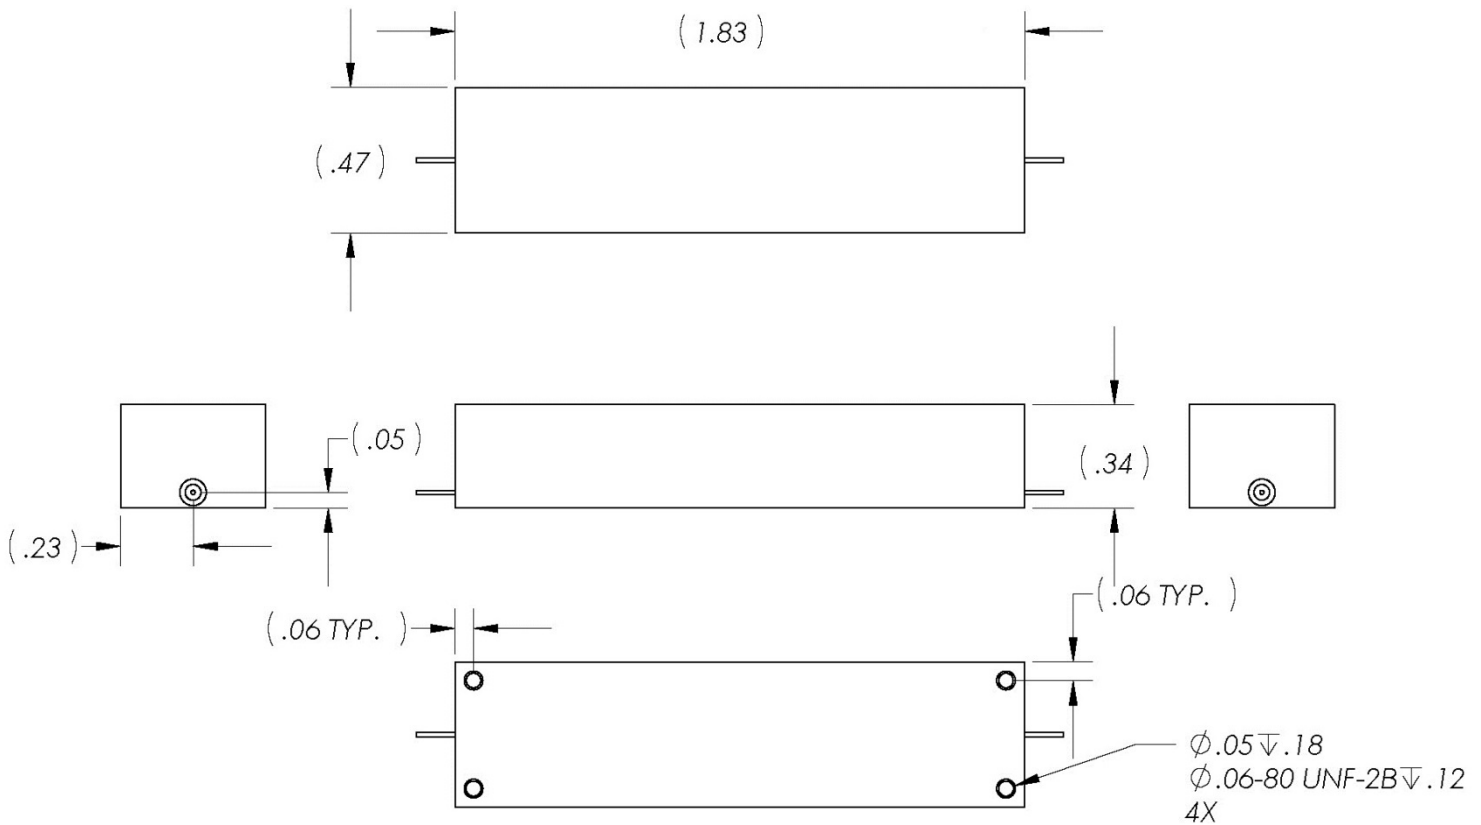



### Response Plot:

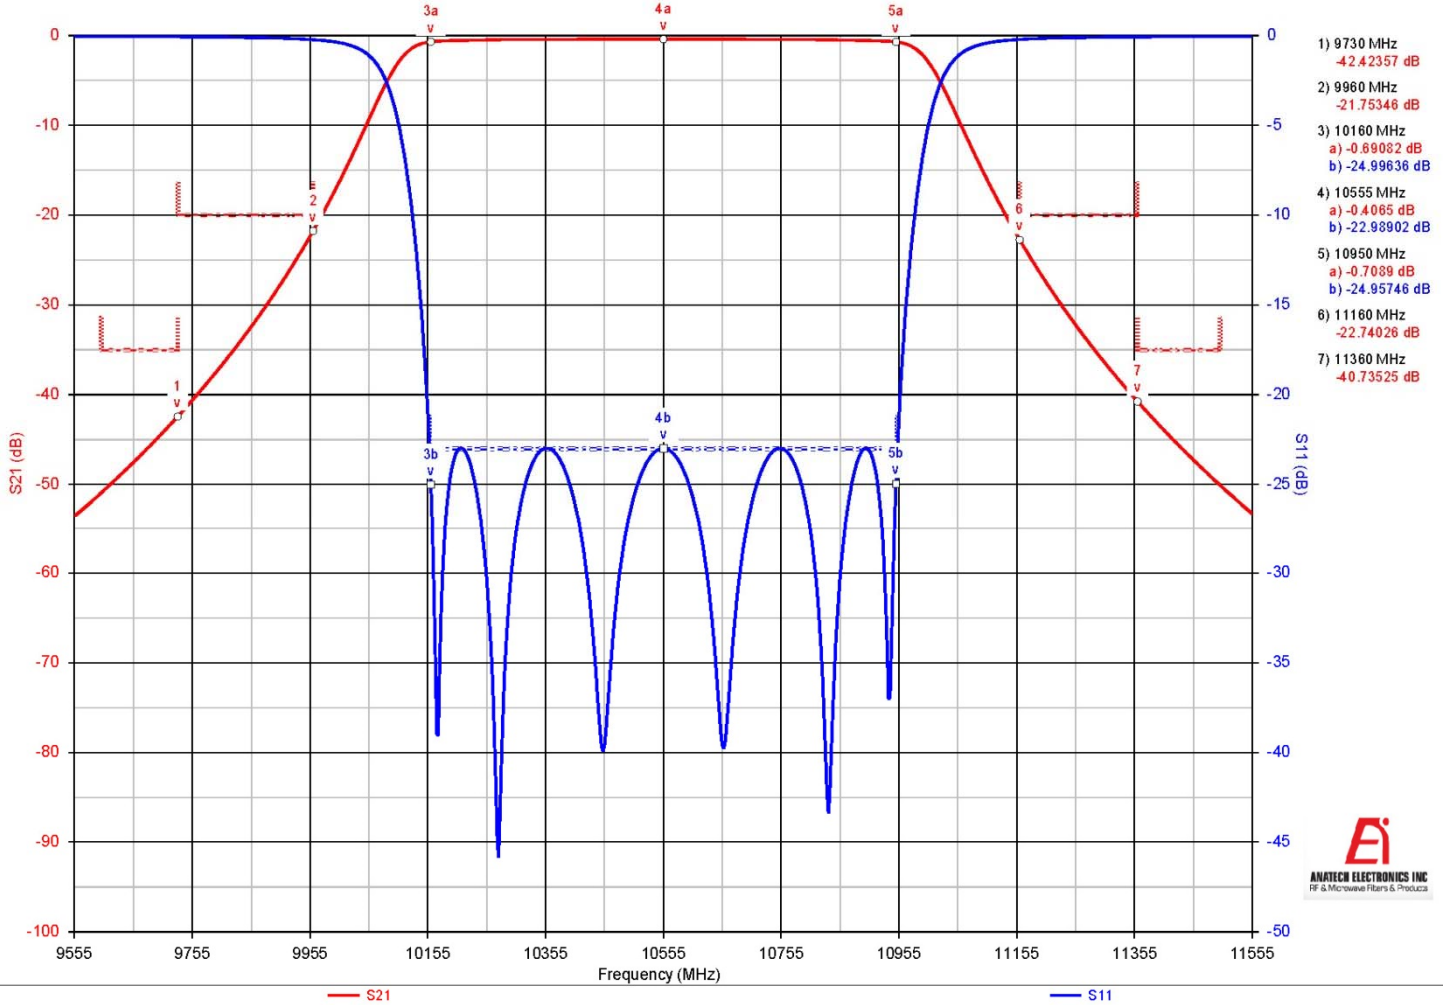

**Note:** This is a simulation plot. Actual results may differ once the product is implemented.