


REV. 0  
DCO 64175

COIL: @ <del>25°C</del> 20°C	
SET	RESET
500 OHMS ±10% @ 25°C	500 OHMS ±10% @ 25°C
24 VDC NOMINAL VOLTAGE	24 VDC NOMINAL VOLTAGE
12 VDC MUST OPERATE	12 VDC MUST OPERATE

CUSTOMER DATA SHEET

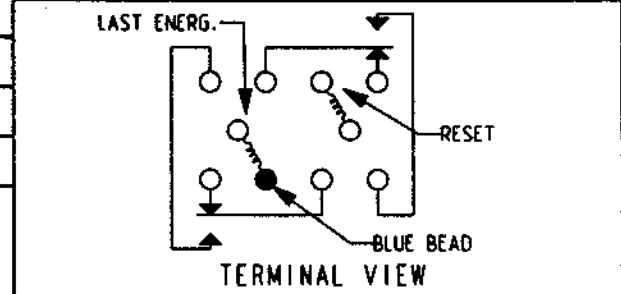

ENVIRONMENT:

VIBRATION 55 Hz 3000 Hz 30 g's

SHOCK 150 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET & RESET TIME 4 MS MAX.  
BOUNCE 2 MS MAX.

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 11/9/01 CK 1/2/01 *[Signature]*



CUST. C.I.I. STD.

CUST. NO. \_\_\_\_\_

TYPE 3SDM RELAY

3SDM5004H1