
<u>م</u> <u>ت</u>	т (п		0	σ			
	S The second sec						
			LAYOUT SHO	WN AS EXAMPLE			
	Keying Shown as example						
CHARACTERISTICS	Connector dimension	7					
Standard : Based on MIL-DTL-38999 Series III	Dim Nominal ØS 25 Max	-					
-Shell Material       : Composite         -Shell Plating       : Nickel         -Insulator       : Thermoplastic         -Contacts       : Copper Alloy	Z'31.5 MaxVV THREADM15x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet : Silicon Elastomer					& Control List		
-Contact Plating : Gold over copper Alloy 0.8µm minimum				FR Not	Listed		
-Durability : 500 Mating cycles -Delivered without Souriau contacts			PN: 8D511M02PEL				
-Temperature Range : -65°C to +200°C		A 16-10	D-2016 First Release				
-Salt Spray : 2000 hours			ATE Latest modification - by		MOE		
- Mass : 10.9 g ± 10%		ISS D/ Designed By:	Date:	CUS	TOMER DRAWING	211	
		ТІТЦ	Composite Plug 8D series				
BASIC SERIES:         8D         5         -         11         M	02 P E L	SCALE		al linear N ances:	PRDS / PROJECT 859		
SHELL TYPE : Plug with RFI Shielding	Delivered V	I/O Contacts NA			This document is the property of		
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11	ORIE CONTACT TYPE : PIN(!		SOURIAU         WWW.SOURIAU.COM         SOURIAU           it must not be reproduced or communicated without permission         communicated without permission				
PLATING : M = Nickel	CONTACT TIPE - PIN(.			RIAU DRG N°	SHE		
	CUNTACT LA	A3		11M02PEL-C	1/		

r	Ŧ	ര	т	m		0
		Contact Layout				
4	(2)	+Y IB IA + + + + + + + + + + + + +				
	Shell Arrangement no. 11 -2	X-axis         Y-axis           (mm)         (mm)           +         -0.95 (2.41)          095 (2.41)         +.000 (.00)				
ယ						
	-					SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend
N						PN: 8D511
					A 16-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:
					TITLE SCALE NA	General linear Tolerances:
_					SOURIA	U WWW.SOURIAU.
				_	FORMAT A3	SOURIAU 8D511N
L	Н	G	F	E	D	C

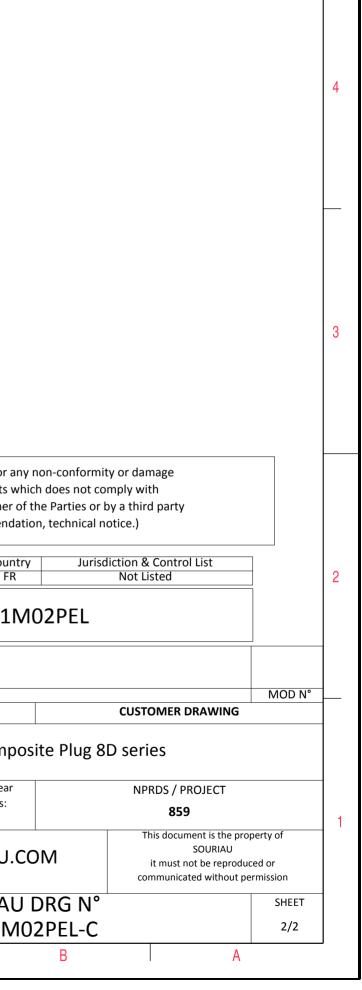

 $\triangleright$ 

σ