


## C-PCIE4-2QSFP28

100Gbs Dual Open QSFP28 Port PCIe 4.0 x16 Network Interface Card w/PXE boot

### Features

- PCI Express v4.0 x16 dual-port 100G fiber Ethernet network adapter card
- iWARP and RoCEv2 Remote Direct Memory Access (ROMA)
- Intel® Ethernet Adaptive Virtual Function (Intel® Ethernet AVF)
- Enhanced server virtualizations: 256 VFs, 768 VSIs
- IEEE 1588 Precision Time Protocol (v1 and v2) with per-packet time stamping.

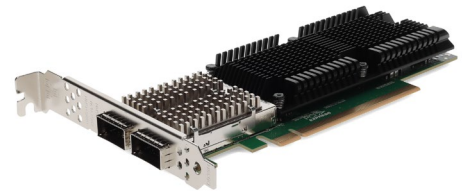


### Product Description

This is a 100-Gigabit Ethernet PCIe 4.0 x16 network interface card with dual open QSFP28 ports that comply with IEEE 802.3 standards. It is based on an Intel XL710 chipset and is compatible with a variety of different applications and operating systems, including Windows, Linux and Unix-like systems. Providing 100Gbs of network speed, it fully supports high-end servers and various other networking applications. In addition, this card supports high level VLAN filtering, iWarp, and RoCE. The dual open QSFP28 ports allow users to choose from a range of QSFP28 transceivers to accommodate multi-mode (MMF) and single-mode (SMF) fiber, granting customizable reach. This product includes both half-height and full-height brackets. Our network interface cards are 100% compliant, and offer a cost effective solution for all of your network upgrade needs. With our certification test program, we guarantee your product will work right the first time.

## Specifications

Parameter	Specification
<b>Controller</b>	Intel Chip
<b>Baffle Height</b>	Half height & full height baffle
<b>Power Consumption</b>	15.0W
<b>System Support</b>	Windows 7/8/8.1/10
	Windows Server 2008 R2/2012 R2/2016 R2/2019 R2;
	Linux Stable Kernel version 2.6.32.x/3.x/4.x/5.x or later;
	CentOS/RHEL 6.x / 7.x or later;
	Ubuntu 14.x/15.x/16.x or later;
	VMware ESX/ESXi 4.x/5.x/6.x or later
<b>Bus Type</b>	PCI Express v4.0 x16, Compatible with PCI Express v3.0
<b>Data rate supported per port</b>	100GbE
<b>Connector</b>	2*QSFP28
<b>Technical Features</b>	
<b>Protocol Support</b>	IEEE 802.3bj 100GBASE Ethernet IEEE 802.3x Full Duplex and flow control IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.3AS IEEE 802.1Q VLAN IEEE 802.1Qaz IEEE 802.1Qbb IEEE 802.1x IEEE 802.1bd IEEE 1588 v1&v2
<b>iSCSI</b>	Yes
<b>Wal</b>	No
<b>Jumbo Frames</b>	Yes
<b>DPDK</b>	Yes
<b>PXE</b>	Yes
<b>FCoE</b>	No
<b>ROMA (iWARP,RoCEv2)</b>	Yes
<b>Network Virtualization</b>	SR-IOV, VxLAN, GENEVE, GRE
<b>Environment Features</b>	
<b>Operating Temperature</b>	0 °C to +55 °C (-40 °F to +131 °F)
<b>Storage Temperature</b>	-55 °C to +105 °C (-67 °F to +221 °F)
<b>Storage Humidity</b>	Maximum: 90% non-condensing relative humidity at 35 °C
<b>LED Indicators</b>	
<b>LED Indicators</b>	100Gbps, Yellow Link + Green Blink
<b>Physical Features</b>	
<b>Size (mm)</b>	1171.5"120"21

**Mechanical Specifications**

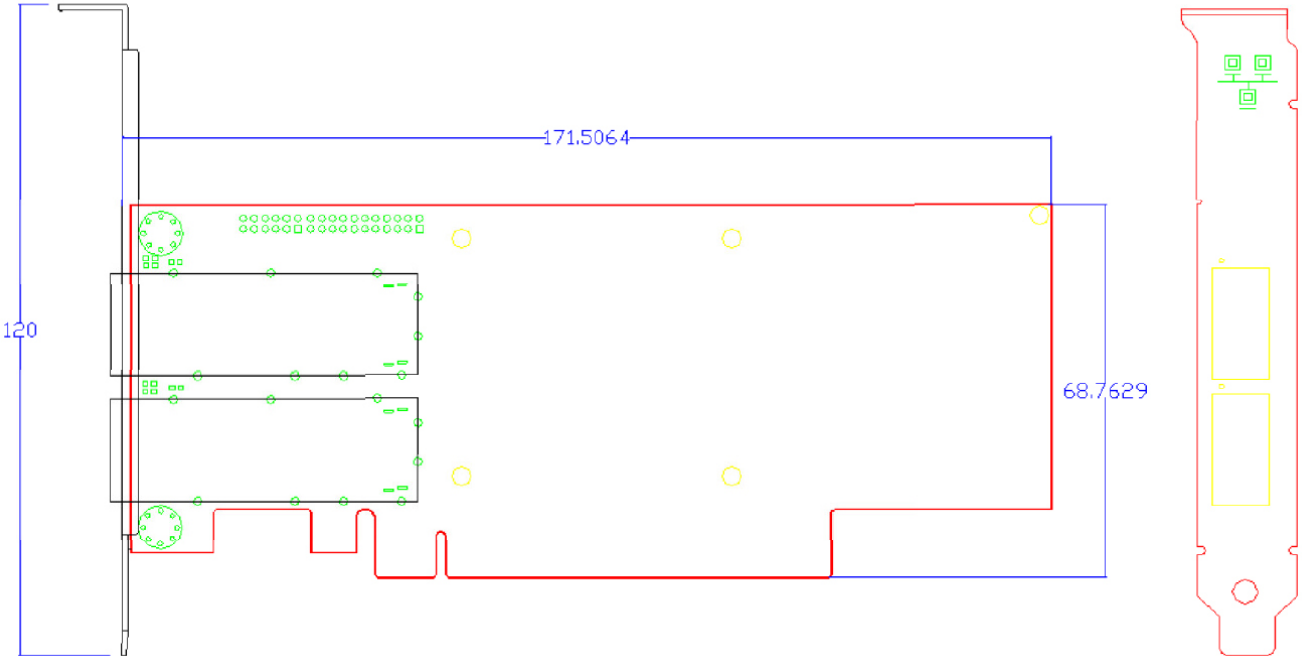

## **About ProLabs**

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

## **Complete Portfolio of Network Solutions**

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

## **Trusted Partner**

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.

## **Contact Information**

ProLabs US

Email: [sales@prolabs.com](mailto:sales@prolabs.com)

Telephone: 952-852-0252

ProLabs UK

Email:

[salesupport@prolabs.com](mailto:salesupport@prolabs.com)

Telephone: +44 1285 719

600