

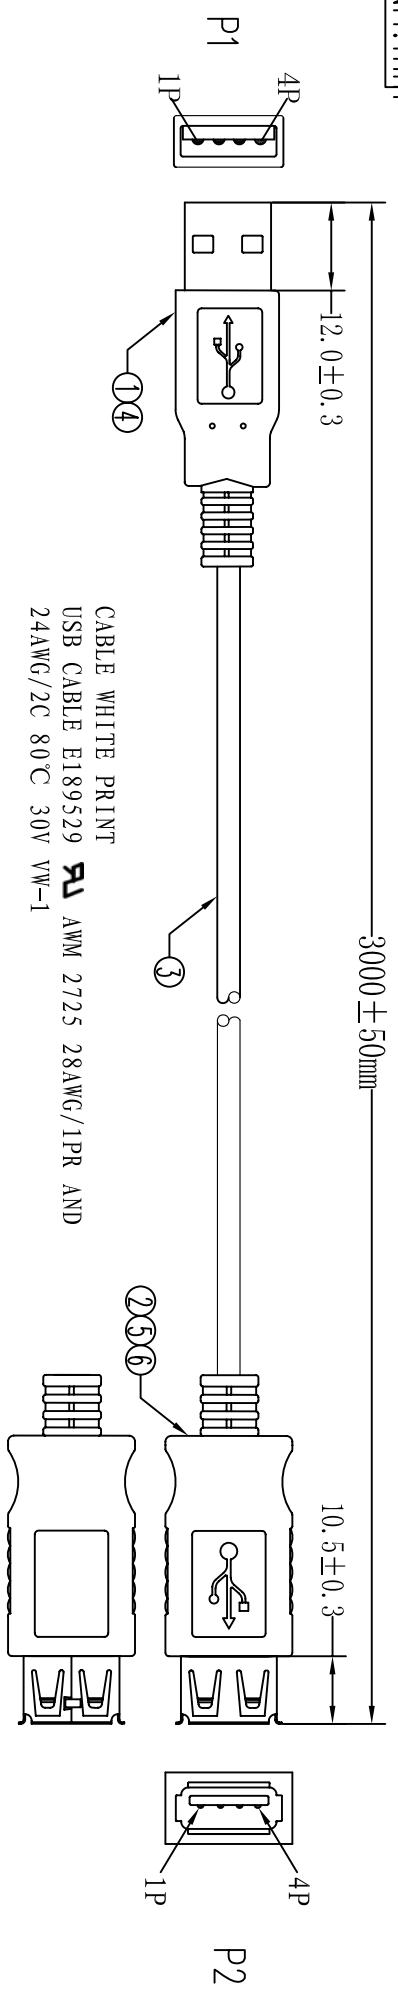


UNIT: mm

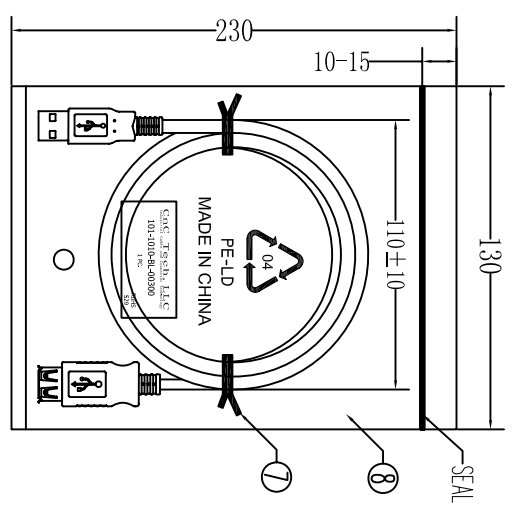

CABLE WHITE PRINT  
 USB CABLE E189529  
 24AWG/2C 80°C 30V VW-1  
 AWM 2725 28AWG/1PR AND

PIN ASSIGNMENT:

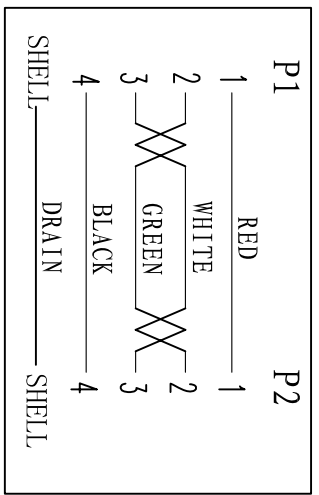

1PC/PE BAG

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK "MADE IN CHINA" + "10PCS".
⑧	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK "MADE IN CHINA" + "1PC".
⑦	TIE	2	BLACK L=100mm
⑥	IN JACKET	3g	CLEAR LDPE (MOULD NO: NM-027)
⑤	OUT JACKET	7g	BLACK PVC-40P (MOULD NO: WM-83)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-40)
③	CABLE	1	BLACK USB1. 1 UI.2725 28#/1P+24#/2C+A+B3 OD: 4.7mm L=3000±10mm
②	CONN	1	USB A FEMALE SHELL: NICKEL PIN G/F SHORT TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB A MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE
NO.	NAME	QTY	SPECIFICATION

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN	Andy	DRAWING NO	VG/LJQ-094-009-A
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1010-BL-00300
DECIDED		DATE	2013-8-23
VERSIONS/EDITION	A/0	PROJECTION	