

RJ45 socket insert - CUC-K-J1ZNI-S/R4IDC8 - 1419021

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



RJ45 socket insert, type: RJ45, degree of protection: IP20, number of positions: 8, 10 Gbps, CAT6_A, material: Zinc die-cast, connection method: IDC connection, connection cross section: AWG 26- 22, Keystone design for use with IP20 panel mounting frame or integrated directly into the housing panel

Product Description


Keystone system

Your advantages

- assembly without special tools
- Compact design
- Rugged design



Key Commercial Data

Packing unit	1 pc
GTIN	 4 0 5 5 6 2 6 2 5 1 4 4 8
GTIN	4055626251448

Technical data

Mechanical characteristics

Number of positions	8
Number of slots	1
Connection profile	RJ45
Insertion/withdrawal cycles	≥ 750
Connection method	IDC connection
Connection cross section AWG	26 ... 22 (solid)
	26 ... 22 (flexible)
External cable diameter	4.5 mm ... 9 mm
Wire diameter	0.4 mm ... 0.65 mm
Wire diameter including insulation	0.8 mm ... 1.6 mm

RJ45 socket insert - CUC-K-J1ZNI-S/R4IDC8 - 1419021

Technical data

Mechanical characteristics

Insulation resistance	> 500 M Ω (100 V DC)
Degree of protection	IP20

Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Degree of protection	IP20

Material data

Housing material	Zinc die-cast
Contact carrier material	PC
Contact material	CuSn
Contact surface material	Gold over nickel

Electrical characteristics

Number of positions	8
Nominal voltage U_N	72 V (DC)
Nominal current I_N	1.5 A
GRP transmission properties	CAT6 _A
Transmission speed	10 Gbps
Frequency range	500 MHz
Rated voltage (III/3)	72 V (DC)


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


RJ45 socket insert - CUC-K-J1ZNI-S/R4IDC8 - 1419021

Drilling diagram

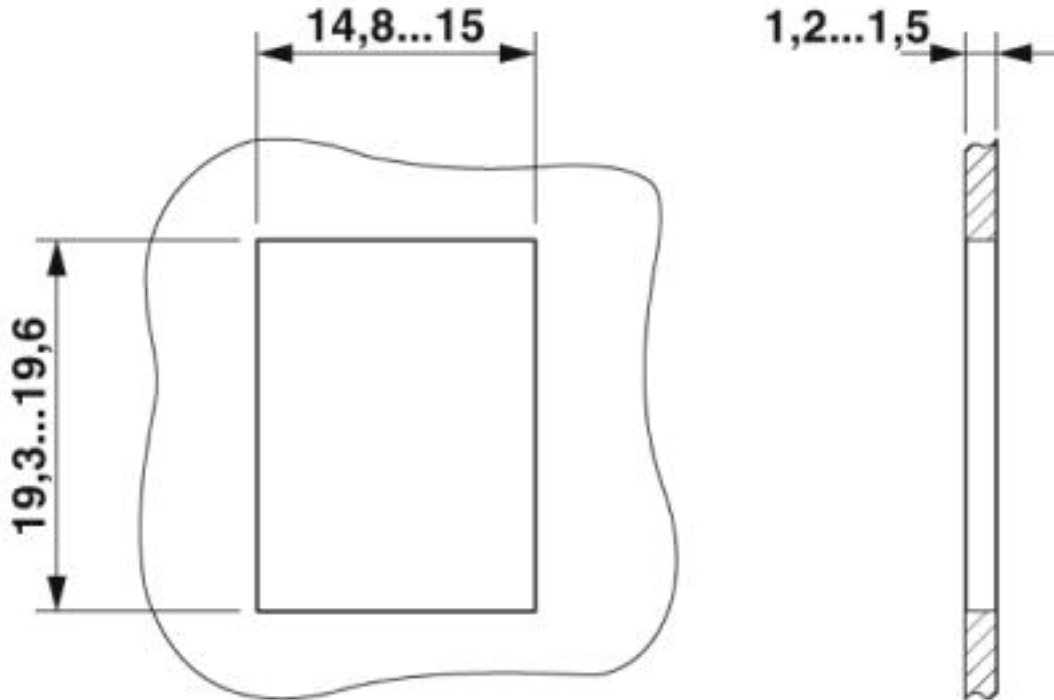

Panel cutout

Dimensional drawing

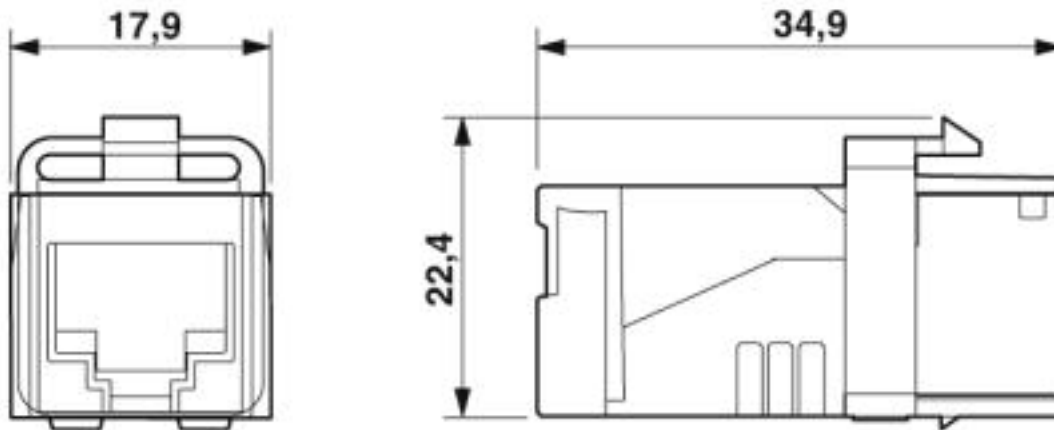

RJ45 socket insert, keystone

Approvals

Approvals

RJ45 socket insert - CUC-K-J1ZNI-S/R4IDC8 - 1419021






Approvals

Approvals

DNV GL / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

DNV GL		https://approvalfinder.dnvgl.com/	TAE000029B
UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 335024
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 335024
EAC			B.01742
cULus Recognized			

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>