
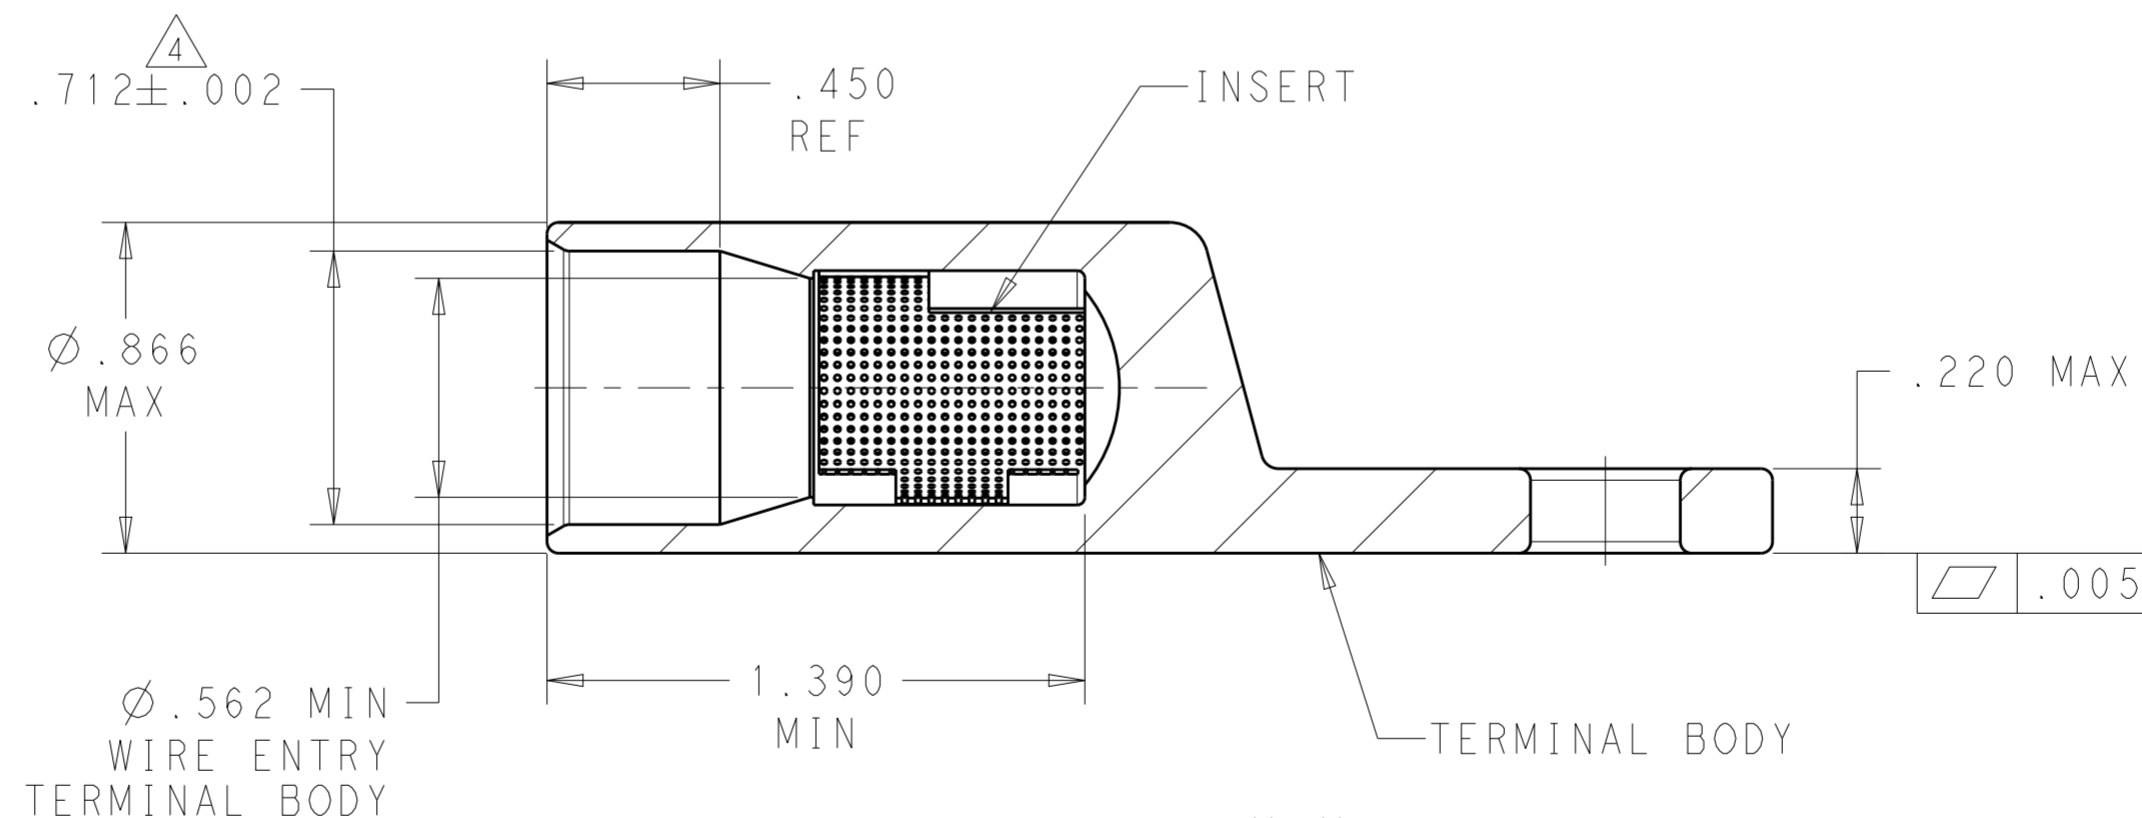
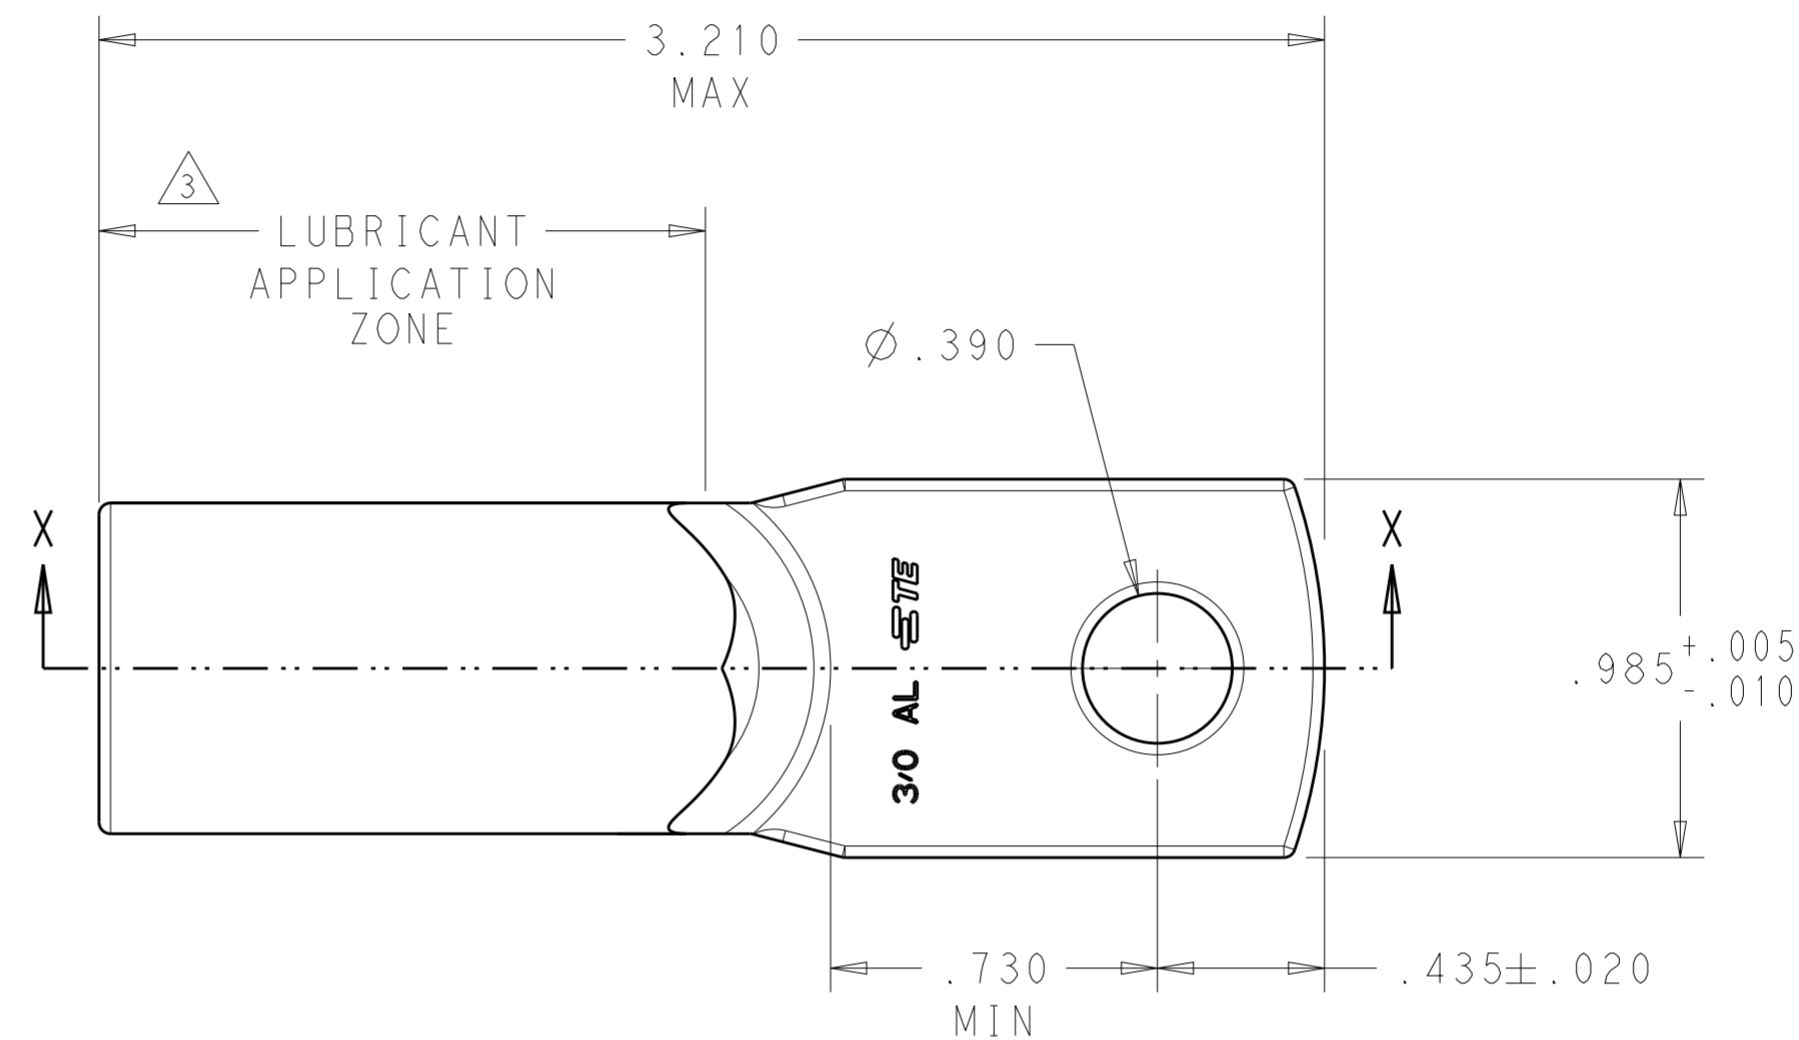


1. MATERIAL:  
BODY: ALUMINUM PER ASTM B317  
INSERT: BRASS PER ASTM B36
2. FINISH:  
BODY: .000600 MIN MATTE TIN PER ASTM B545  
OVER .000060 MIN NICKEL PER ASTM B733.  
INSERT: .000150 MIN MATTE NICKEL PER QQ-N-290
3. PTFE DRY LUBRICANT 360 DEGREE ON OUTER DIAMETER OF CRIMP BARREL IN ZONE SHOWN.
4. WIRE INSULATION RANGE: .520-.633.
5. SEE TE CONNECTIVITY APPLICATION SPEC. 114-32098 FOR APPLICATION REQUIREMENTS.
6. SEE TE CONNECTIVITY INSTRUCTION SHEET 408-32087 FOR TOOLING AND CRIMP INSTRUCTIONS, FIGURE 3 FOR WIRE STRIPPING DETAIL.

P	LTR	DESCRIPTION	DATE	DWN	APVD
C		REV PER ECO 19-019314	2-27-20	CT	PD

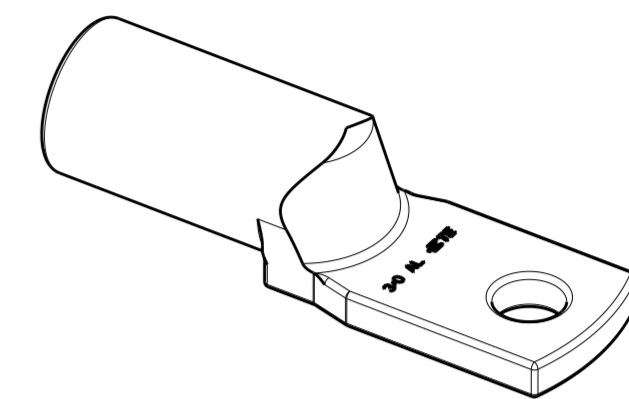

SECTION X-X

2102574-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. FABIAN 15NOV2011	TE Connectivity	
DIMENSIONS: IN		CHK DEBOCK, KIM 28NOV2012		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD DEBOCK, KIM 28NOV2012	NAME ASSEMBLY, ALUMINUM TERMINAL, STRAIGHT, SINGLE HOLE, 3/0	
0 PLC ±-		PRODUCT SPEC	SIZE	
1 PLC ±.1		APPLICATION SPEC	CAGE CODE	
2 PLC ±.01		WEIGHT	DRAWING NO	
3 PLC ±.005		CUSTOMER DRAWING	RESTRICTED TO	
4 PLC ±.0005		SCALE 2:1	SHEET 1 OF 1	
ANGLES ±1°		REV C		
FINISH				
SEE CALL-OUT				