



.XX ±0.13 .XXX ±0.05 DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

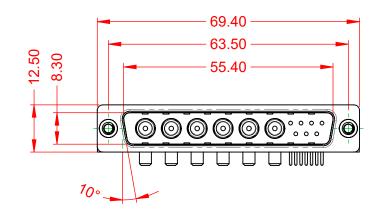




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE:	$5000M\Omega$ min.

DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms



	SW				SW REFERENCE NO.: 629 COMBO ASSEMBLY					
	-		COMBINATION D-SUB DRAWN: C.B		В	DATE: JAN. 01/2019		19		
			CHECKED:		DATE:					
	EDAC INC TORONTO, ONTARIO CANADA VOLID CONNECTION TO CLIMATIVA & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN O	C.A.D. 1:1)	SHEET 1	OF	2			
		MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-13W6640-3N4				ISSUE			
YOUR CONNECTION TO			PART NUMBER	R: 629-13W6	640-3N4		1			



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

