

T	Q	п –	m	0



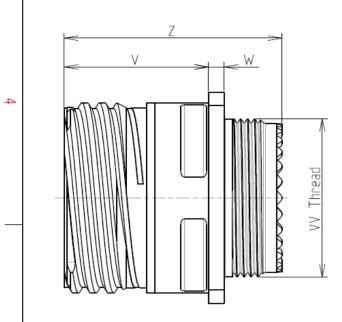

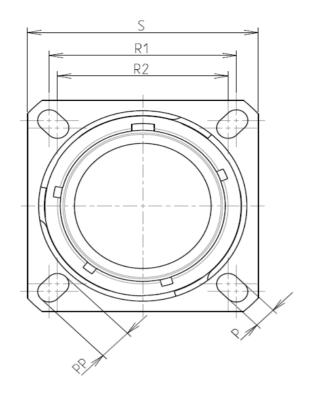

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8 $\mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	-65℃ to +175℃				

: 500 hours

8D 0

G

13

Ζ

03

А

F


В


Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-03



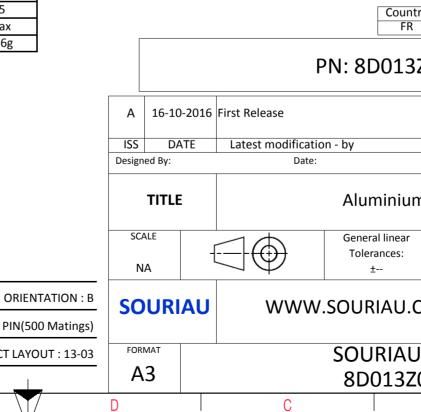

	Φ		A		
					4
AS EXA	AMPLE				3
s whic er of t idatio	non-conformit th does not co he Parties or t on, technical n	mply with by a third par otice.)	ty		
Intry R	Jurisd	liction & Con Not Listed		1	2
3Z03AB					
				MOD N°	
um	CUSTOMER DRAWING				
ar	NPRDS / PROJECT				
-			359		1
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°	1		SHEET	
020.	3AB-C B		A	1/2	J

	<b>工</b>	۵	н <b>т</b>	m		0	
		Contact Layout					Panel Cuto
4		03 () ) ) 3#16			ï	SQUARE FLANGE RECEPTACLE (TYPREAR MOUNTING	DE 0)
	Ctc A B C	13-03   X Y   2.39 1.47   0 -2.79   -2.39 1.47					ØA
ယ							ØA ØAA R1 ØT
	-						
	<b>a</b>					SOURIAU shall not due to a use of the Specifications iss (profession)	the Products w
N							Count FR
						PN	N: 8D013
					A 16-1	0-2016 First Release	
					ISS D Designed By:	ATE Latest modification - Date:	- by
					TITL	E	Aluminiur
<b>_</b>					SCALE NA		General linear Tolerances: ±
					SOUR	AU WWW.S	OURIAU.(
					FORMAT A3		SOURIAU 8D013Z
	Н	G	F	E	D	С	

