

т	۵	н т	m	D	O



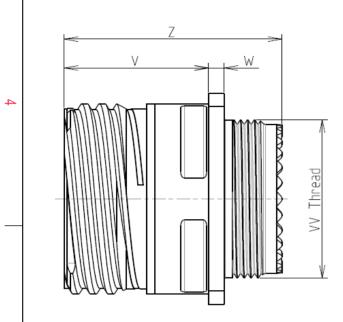



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau	contacts and Accessories			
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 500 hours			

8D 0

G

21

W

72


S


F

D

Connector	r dimension		
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	31.75		
R2	29.36		
S	39.7±0.3		
V	20.07+0/-1.25		
W	2.1/3.2		
Z	31.5 Max		
VV THREAD	M31x1-6g		

Е



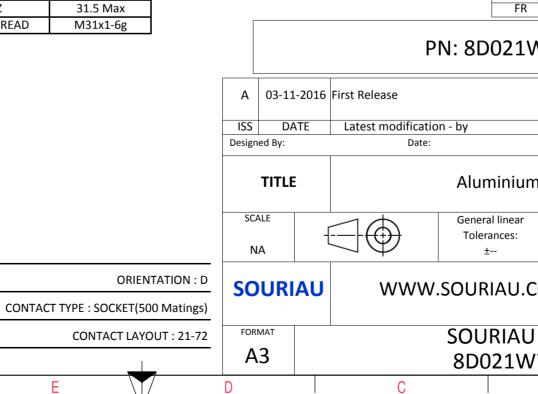

	Ξ		А			
		I				
-						
					4	
1	6 50					
	A STATES	7				
	a series					
0		de la				
	1					
S EXA	AMPLE				3	
-						
	non-conformit ch does not co					
er of t	he Parties or b on, technical n	by a third part	ÿ			
untry FR	Jurisd	liction & Cont Not Listed	rol List		2	
1\^/						
τvv	72SD					
	1			MOD N°		
		CUSTOME	RDRAWING			
um Receptacle 8D series						
ar :	NPRDS / PROJECT					
859 This document is the property of						
J.CC	M		SOURIAU t not be reproduc			
			cated without per	rmission		
	DRG N°			SHEET 1/2		
W72SD-C 1/2 B A					J	
	D	I	A			

-	т	۵	н п	m		0
4		Contact Layout 72			<u>ح</u> –	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		2#4 Power 6#16 21-72]		V	
c.s	Ctc A B C D E F G H	X Y 0 6.19 8.5 4.3 6.25 0 8.5 -4.3 0 -6.19 -8.5 -4.3 -6.25 0 -8.5 4.3				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						PN: 8D021
					A 03-11-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:
_					SCALE NA	Aluminiun General linear Tolerances: ±
					FORMAT A3	SOURIAU 8D021W
	Н	G	F F	E	D	C

