

6

5

4

3

2

1


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/18	




D

D

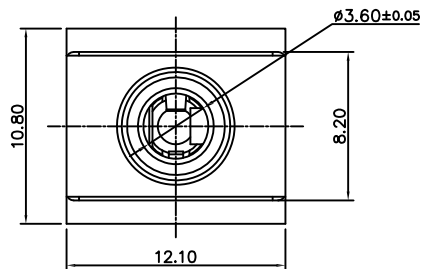

C


C

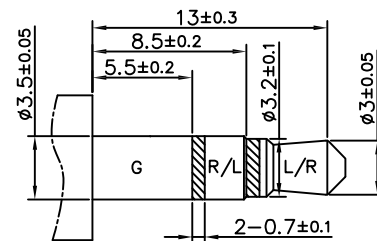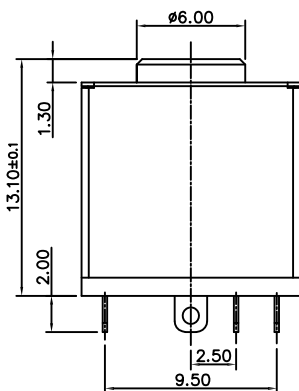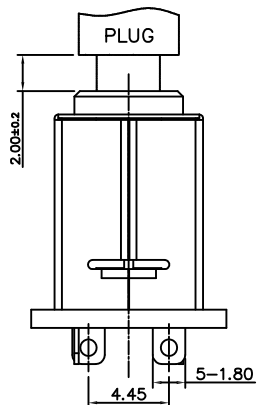

MATE PLUG

B

B



Model No.	ASJ-194-L-RD-30
Schematic	

SPECIFICATIONS:

Material:  
Housing: PA66, rated UL 94V-0, Color: Black  
Cover: PBT, rated UL 94V-0, Color: Red  
Contacts: Phosphor Bronze  
Shell: Steel Alloy  
Plating:  
30u" Gold over Nickel underplate on contact area,  
Matte Tin over Nickel underplate on solder tails  
Electrical:  
Rating: 30V, 0.5A  
Contact resistance: 30 mohms max.  
Insulation resistance: 100 Mohms min. @ 500 VDC  
Dielectric withstanding voltage: 500 VAC  
Temperature Rating:  
Operating temperature: -20°C to +70°C  
Environmental:  
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MM ANGLE .X ± 0.50 X ± 5° .XX ± 0.30 .X ± 3° .XXX ± 0.15 .XX ± 2°		<b>ADAM TECH</b> INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	HR	11/16/18		STEREO JACK, 3.5MM, VERTICAL, RED COVER	
CHECKED	AC1	11/16/18		SOLDER TERMINAL, 30u" GOLD PLATED	
APPROVED		SIZE	PART NO.	REV.	
		X	ASJ-194-L-RD-30	-	
REF: S00002C		SCALE: NTS	SHEET 1 OF 1		

6

5

4

3

2

1

A

A