
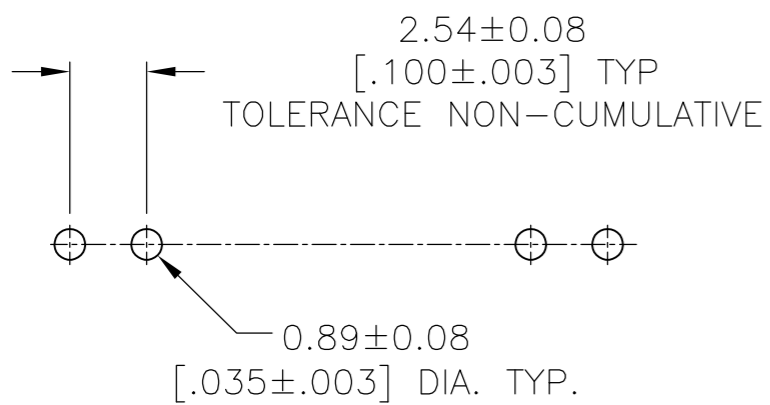


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	J	REVISED PER ECO-14-000066		30JUN2014	NK	MM	

- 1 TRUE POSITION TOLERANCE OF THE POSTS TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 FINISH: 0.000127 [.000005] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL ALL OVER 0.00127 [.000050] NICKEL.
- 4 FINISH: 0.000127 [.000005] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL ALL OVER 0.00127 [.000050] NICKEL.
- 5 HIGH TEMPERATURE CONFIGURATION
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

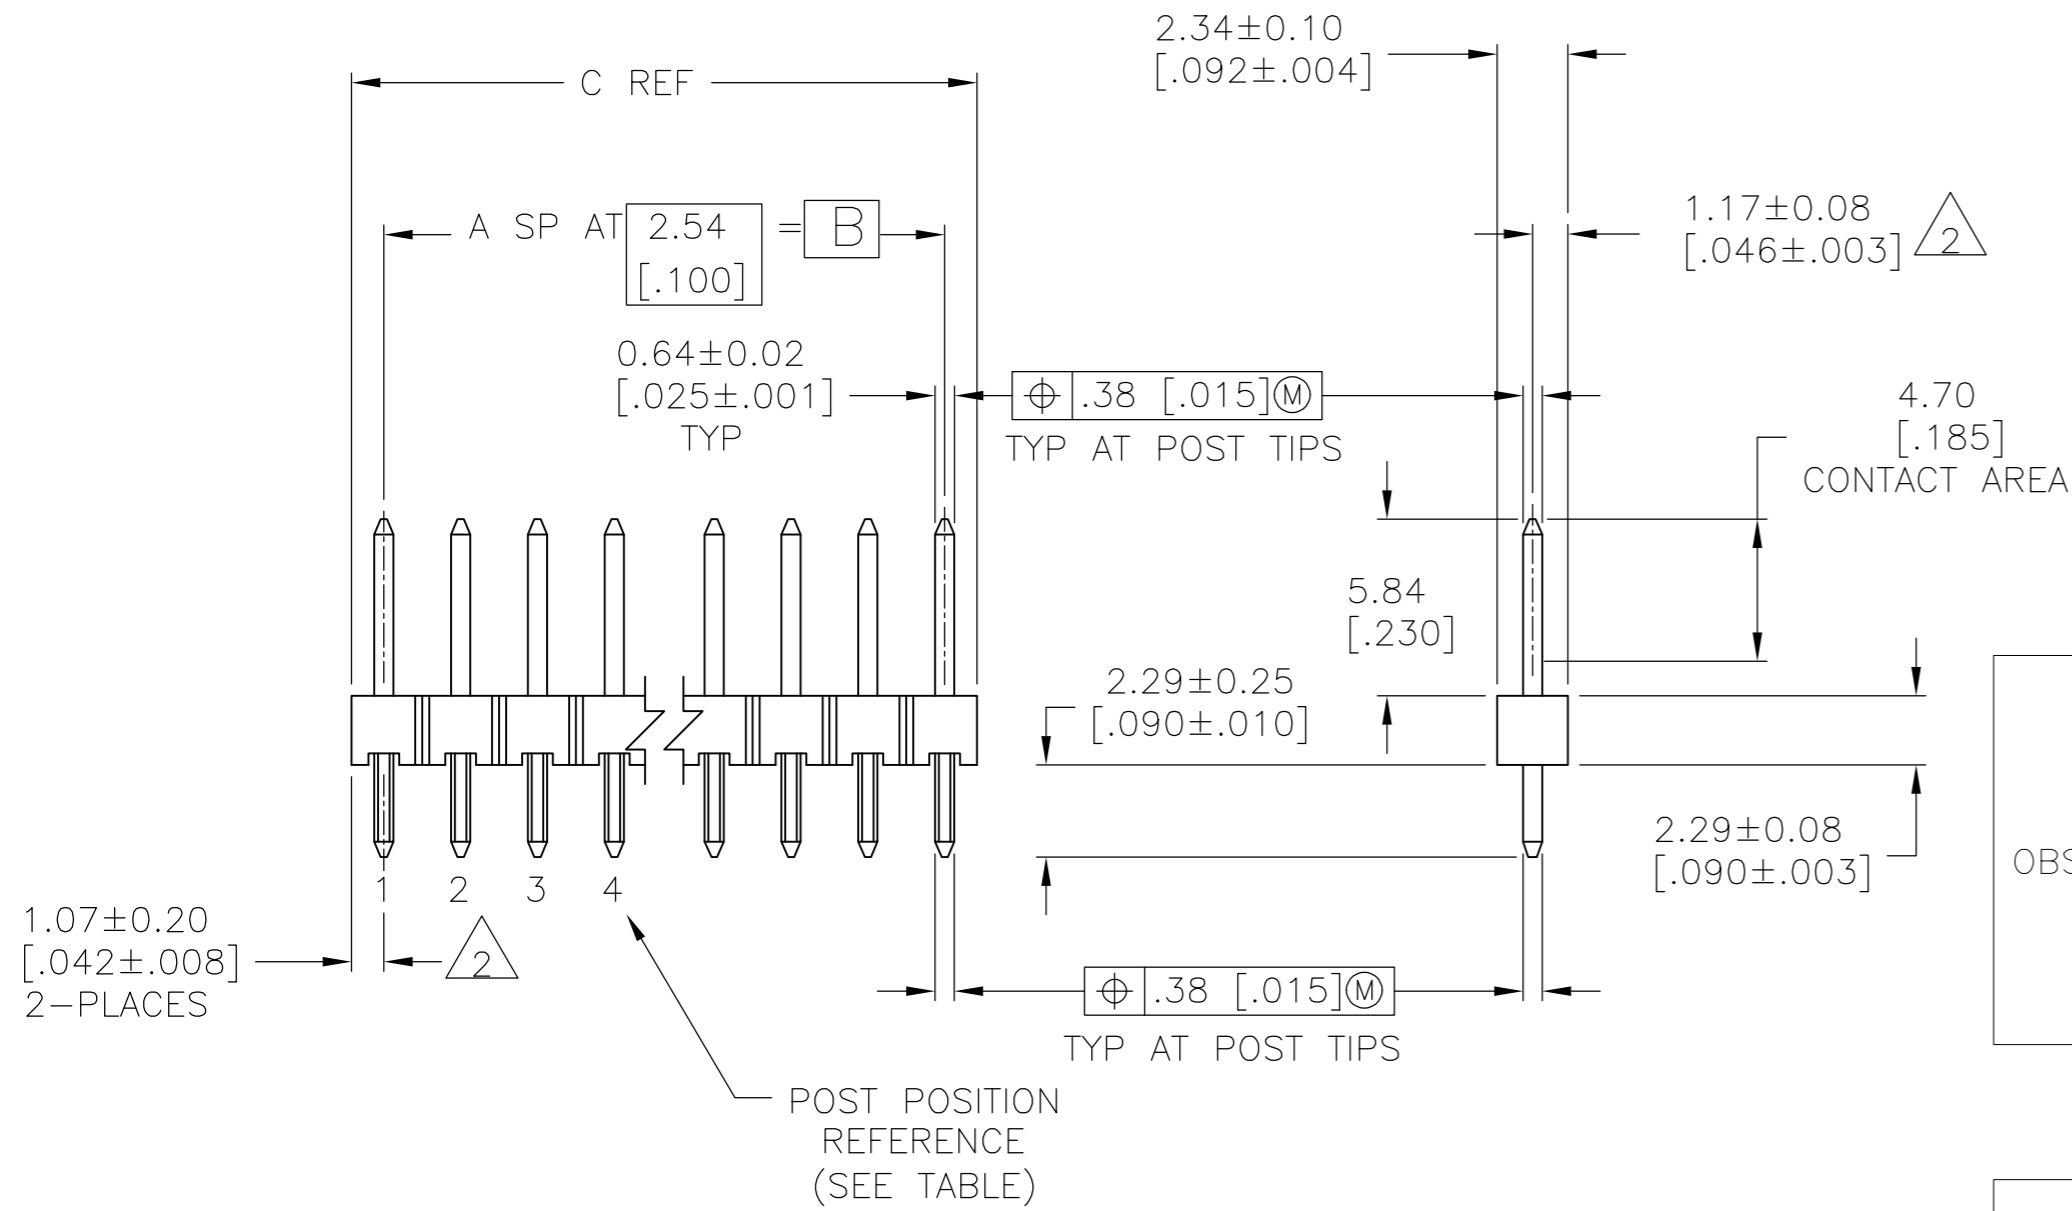

OBSOLETE	4	5	NONE	7.21 [.284]	5.08 [.200]	2	3	3	5-146225-3
	4	5	2	19.91 [.784]	17.78 [.700]	7	7	8	5-146225-2
	4	5	NONE	9.75 [.384]	7.62 [.300]	3	4	4	5-146225-1
OBSOLETE	3		NONE	7.21 [.284]	5.08 [.200]	2	3	3	146225-3
	3		2	19.91 [.784]	17.78 [.700]	7	7	8	146225-2
	3		NONE	9.75 [.384]	7.62 [.300]	3	4	4	146225-1
PLATING	REMARKS	POST OMITTED	C	B	A	NO. OF ACTIVE POSN	NO. OF POSN	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: T. HOFFMAN 3/6/95
 CHK: G.DUBNICZKI 3/15/95
 APVD: G.DUBNICZKI 3/15/95

TE Connectivity

NAME: G.DUBNICZKI
 PRODUCT SPEC: APPLICATION SPEC

HEADLINE: HEADLINE ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, .100 , VERTICAL, .025 SQ.POST, SELECT LOAD

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=146225 RESTRICTED TO: -

MATERIAL: HOUSING : FLAME RETARDANT THERMOPLASTIC COLOR : BLACK POSTS : COPPER ALLOY FINISH: SEE TABLE WEIGHT: -

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: J