


Data sheet | Item number: 2022-2233

1-conductor/1-pin double deck receptacle terminal block; Through/through terminal block; 2.5 mm²; L/N; with marker carrier; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; gray



www.wago.com/2022-2233

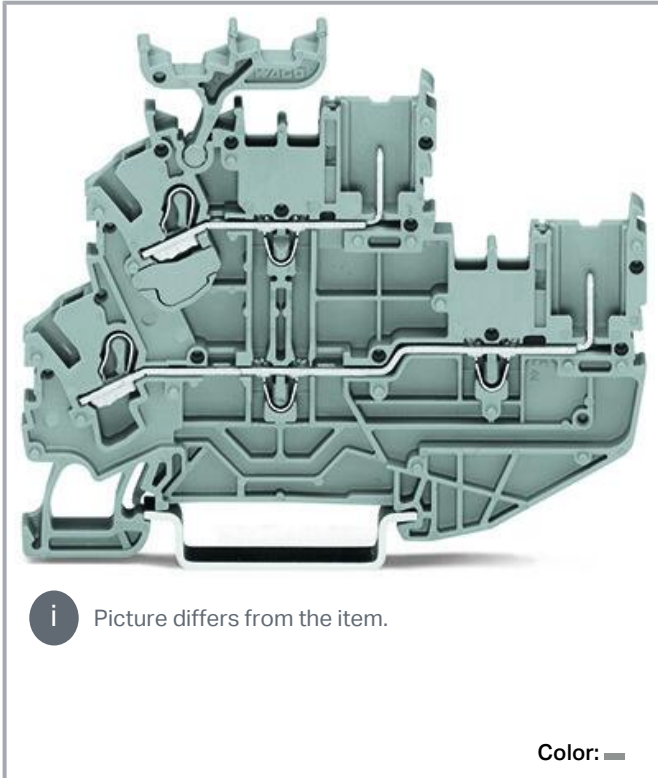

Data

Electrical data

Ratings per IEC/EN

| | |
|---|---|
| Ratings per | IEC/EN 60947-7-1 |
| Nominal voltage (III/3) | 690 V |
| Rated impulse voltage (III/3) | 6 kV |
| Rated current | 24 A |
| Current at conductor cross-section (max.) mm ² | 28 A |
| Legend (ratings) | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Ratings per UL 1059

| | |
|--------------------------------|---------|
| Approvals per | UL 1059 |
| Rated voltage UL (Use Group B) | 600 V |
| Rated current UL (Use Group B) | 20 A |
| Rated voltage UL (Use Group C) | 600 V |
| Rated current UL (Use Group C) | 20 A |

Ratings per CSA

| | |
|---------------------------------|-----------------|
| Approvals per | CSA 22.2 No 158 |
| Rated voltage CSA (Use Group C) | 600 V |
| Rated current CSA (Use Group C) | 20 A |

Power loss

| | |
|--|----------------|
| Power loss, per pole (potential) | 0.766 W |
| Rated current I_N for specified power loss | 24 A |
| Resistance value for specified, current-dependent power loss | 0.001 Ω |

Connection data

| | |
|------------------------------|---|
| Connection points | 2 |
| Female plug slots | 2 |
| Total number of potentials | 2 |
| Number of levels | 2 |
| Number of jumper slots | 4 |
| Anzahl Brückeraufnahmen Rang | 1 |

Connection 1

| | |
|---|--|
| Connection technology | Push-in CAGE CLAMP® |
| Actuation type | Operating tool |
| Connectable conductor materials | Copper |
| Nominal cross-section | 2.5 mm ² |
| Solid conductor | 0.25 ... 4 mm ² / 22 ... 12 AWG |
| Solid conductor; push-in termination | 0.75 ... 4 mm ² / 18 ... 12 AWG |
| Fine-stranded conductor | 0.25 ... 4 mm ² / 22 ... 12 AWG |
| Fine-stranded conductor; with insulated ferrule | 0.25 ... 2.5 mm ² / 22 ... 14 AWG |

Subject to changes. Please also observe the further product documentation!



| | |
|--|---|
| Fine-stranded conductor; with ferrule; push-in termination | 1 ... 2.5 mm ² / 18 ... 14 AWG |
| Note (conductor cross-section) | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length | 10 ... 12 mm / 0.39 ... 0.47 inches |
| Wiring direction | Front-entry wiring |

Physical data

| | |
|-----------------------------------|------------------------|
| Width | 5.2 mm / 0.205 inches |
| Height | 80.1 mm / 3.154 inches |
| Depth from upper-edge of DIN-rail | 61.4 mm / 2.417 inches |

Mechanical Data

| | |
|-------------------|-----------------|
| Potential marking | L/N |
| Design | horizontal type |
| Mounting type | DIN-35 rail |
| Marking level | Side marking |

Material Data

| | |
|-----------------------------|--|
| Note (material data) | Information on material specifications can be found here |
| Color | gray |
| Material group | I |
| Insulation material | Polyamide (PA66) |
| Flammability class per UL94 | V0 |
| Fire load | 0.267 MJ |
| Weight | 12.2 g |

Environmental requirements

| | |
|----------------------------------|-----------------|
| Processing temperature | -35 ... +85 °C |
| Continuous operating temperature | -60 ... +105 °C |

Commercial data

| | |
|---------------|-------------------|
| Product Group | 18 (X-COM-System) |
| eCl@ss 10.0 | 27-14-11-20 |
| eCl@ss 9.0 | 27-14-11-20 |
| ETIM 8.0 | EC000897 |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.




| | |
|-----------------------|---------------|
| ETIM 7.0 | EC000897 |
| PU (SPU) | 50 pcs |
| Packaging type | Box |
| Country of origin | DE |
| GTIN | 4045454916572 |
| Customs tariff number | 85369010000 |

Environmental Product Compliance



| | |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

Approvals / Certificates

General approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|--|---------------------------------------|--------------------------|------------------|
|  | CSA DEKRA Certification B.V. | C22.2 No. 158 | 2437422 |
|  | KEMA/KEUR DEKRA Certification B.V. | EN 60947 | 71- 116567 |
|  | UL Underwriters Laboratories Inc. | UL 1059 | E45172 |

Declarations of conformity and manufacturer's declarations

| Logo | Approval | Additional Approval Text | Certificate name |
|--|--|--------------------------|------------------|
|  | EU-Declaration of Conformity WAGO GmbH & Co. KG | - | - |
|  | UK-Declaration of Conformity WAGO GmbH & Co. KG | - | - |





Approvals for marine applications

| Logo | Approval | Additional Approval Text | Certificate name |
|------|----------|--------------------------|------------------|
| | | | |


Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

| | | | |
|---|---|----------|--------------------------|
|  | ABS American Bureau of Shipping | EN 60947 | 20- HG1941090- PDA |
|  | BV Bureau Veritas S.A. | EN 60947 | 38586/B0 BV |
|  | DNV GL Det Norske Veritas, Germanischer Lloyd | - | TAE00001V2 |
|  | LR Lloyds Register | EN 60947 | 91/20112 (E9) |



Counterpart

| | | |
|---|--|--|
|  | Item no.2022-101 1-conductor female connector; Push-in CAGE CLAMP®; 4 mm²; Pin spacing 5.2 mm; 1-pole; 4,00 mm²; gray | www.wago.com/2022-101 |
|---|--|--|

Required accessories

End plate


End plate

| | | |
|--|--|--|
|  | Item no.: 2022-2291 End and intermediate plate; 1 mm thick; gray | www.wago.com/2022-2291 |
|  | Item no.: 2022-2292 End and intermediate plate; 1 mm thick; orange | www.wago.com/2022-2292 |

Optional accessories

Testing and measuring

Testing accessories

| | | |
|--|--|--|
|  | Item no.: 859-500 WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 10 mm uninsulated; Test lead for soldering up to 0,5mm² | www.wago.com/859-500 |
|--|--|--|

Ferrule

Ferrule

| | |
|---|--------------------------|
|  | Item no.: 216-241 |
|---|--------------------------|

Subject to changes. Please also observe the further product documentation!

| | | |
|---|--|--|
| | Ferrule; Sleeve for 0.5 mm ² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | www.wago.com/216-241 |
|  | Item no.: 216-242 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | www.wago.com/216-242 |
|  | Item no.: 216-243 Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red | www.wago.com/216-243 |
|  | Item no.: 216-244 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | www.wago.com/216-244 |
|  | Item no.: 216-263 Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red | www.wago.com/216-263 |
|  | Item no.: 216-246 Ferrule; Sleeve for 2.5 mm ² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue | www.wago.com/216-246 |
|  | Item no.: 216-266 Ferrule; Sleeve for 2.5 mm ² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue | www.wago.com/216-266 |
|  | Item no.: 216-264 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | www.wago.com/216-264 |
|  | Item no.: 216-284 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | www.wago.com/216-284 |
|  | Item no.: 216-286 Ferrule; Sleeve for 2.5 mm ² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue | www.wago.com/216-286 |
|  | Item no.: 216-262 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | www.wago.com/216-262 |

Protective warning marker

Cover



Item no.: 2002-115
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

www.wago.com/2002-115

Coding

Coding




Item no.: 2022-100
Carrier with 6 coding pins; for coding of female plugs; orange

www.wago.com/2022-100

Push-in type wire jumper

Jumper

Subject to changes. Please also observe the further product documentation!

| | | |
|--|---|--|
|  | Item no.: 2009-412 Push-in type wire jumper; insulated; 60 mm long; black | www.wago.com/2009-412 |
|  | Item no.: 2009-414 Push-in type wire jumper; 1.5 mm ² ; insulated; 110 mm long; black | www.wago.com/2009-414 |
|  | Item no.: 2009-416 Push-in type wire jumper; 1.5 mm ² ; insulated; 250 mm long; black | www.wago.com/2009-416 |
|  | Item no.: 2009-414/000-005 Push-in type wire jumper; 1.5 mm ² ; insulated; 110 mm long; black | www.wago.com/2009-414/000-005 |
|  | Item no.: 2009-414/000-006 Push-in type wire jumper; insulated; 110 mm long; black | www.wago.com/2009-414/000-006 |
| Tool | | |
| Operating tool | | |
|  | Item no.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured | www.wago.com/210-720 |
| Carrier rail | | |
| Mounting accessories | | |
|  | Item no.: 210-197 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored | www.wago.com/210-197 |
|  | Item no.: 210-198 Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored | www.wago.com/210-198 |
|  | Item no.: 210-504 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored | www.wago.com/210-504 |
|  | Item no.: 210-505 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored | www.wago.com/210-505 |
|  | Item no.: 210-506 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored | www.wago.com/210-506 |
|  | Item no.: 210-508 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored | www.wago.com/210-508 |
|  | Item no.: 210-113 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored | www.wago.com/210-113 |

Subject to changes. Please also observe the further product documentation!



Item no.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

www.wago.com/210-118



Item no.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

www.wago.com/210-112



Item no.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored


www.wago.com/210-114



Item no.: 210-115

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

www.wago.com/210-115



Item no.: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

www.wago.com/210-196

Insulation stop

Insulation stop



Item no.: 2002-171

Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray

www.wago.com/2002-171



Item no.: 2002-172

Insulation stop; 0.75 - 1 mm²; 5 pieces/strip; dark gray

www.wago.com/2002-172

Marking accessories

Marking strip



Item no.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

www.wago.com/2009-110

Marker carrier



Item no.: 2009-198

Adaptor; gray

www.wago.com/2009-198

Marker



Item no.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

www.wago.com/2009-145



Item no.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

www.wago.com/2009-115



Item no.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

www.wago.com/248-501



Item no.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

www.wago.com/793-5501

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden














Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Jumpers

| Jumper | | |
|--|--|--|
|  | Item no.: 210-123 Wire commoning chain; insulated; blue | www.wago.com/210-123 |
|  | Item no.: 2002-402 Jumper; 2-way; insulated; light gray | www.wago.com/2002-402 |
|  | Item no.: 2002-402/000-005 Jumper; 2-way; insulated; red | www.wago.com/2002-402/000-005 |
|  | Item no.: 2002-400 Continuous jumper; 2-way; insulated; light gray | www.wago.com/2002-400 |
|  | Item no.: 2002-403 Jumper; 3-way; insulated; light gray | www.wago.com/2002-403 |
|  | Item no.: 2002-404/000-005 Jumper; 4-way; insulated; red | www.wago.com/2002-404/000-005 |
|  | Item no.: 2002-403/000-006 Jumper; 3-way; insulated; blue | www.wago.com/2002-403/000-006 |
|  | Item no.: 2002-404/000-006 Jumper; 4-way; insulated; blue | www.wago.com/2002-404/000-006 |
|  | Item no.: 2002-403/000-005 Jumper; 3-way; insulated; red | www.wago.com/2002-403/000-005 |
|  | Item no.: 2002-405/000-005 Jumper; 5-way; insulated; red | www.wago.com/2002-405/000-005 |
|  | Item no.: 2002-402/000-006 Jumper; 2-way; insulated; blue | www.wago.com/2002-402/000-006 |
|  | Item no.: 2002-405/000-006 Jumper; 5-way; insulated; blue | www.wago.com/2002-405/000-006 |
|  | Item no.: 2002-404 Jumper; 4-way; insulated; light gray | www.wago.com/2002-404 |

Subject to changes. Please also observe the further product documentation!



Item no.: 2002-406/000-006
Jumper; 6-way; insulated; blue

www.wago.com/2002-406/000-006



Item no.: 2002-406/000-005
Jumper; 6-way; insulated; red

www.wago.com/2002-406/000-005



Item no.: 2002-406/020-000
Delta jumper; insulated; light gray

www.wago.com/2002-406/020-000



Item no.: 2002-405
Jumper; 5-way; insulated; light gray

www.wago.com/2002-405



Item no.: 2002-407/000-005
Jumper; 7-way; insulated; red

www.wago.com/2002-407/000-005



Item no.: 2002-408
Jumper; 8-way; insulated; light gray

www.wago.com/2002-408



Item no.: 2002-408/000-006
Jumper; 8-way; insulated; blue

www.wago.com/2002-408/000-006



Item no.: 2002-405/011-000
Star point jumper; 3-way; insulated; light gray

www.wago.com/2002-405/011-000



Item no.: 2002-407/000-006
Jumper; 7-way; insulated; blue

www.wago.com/2002-407/000-006



Item no.: 2002-408/000-005
Jumper; 8-way; insulated; red

www.wago.com/2002-408/000-005



Item no.: 2002-407
Jumper; 7-way; insulated; light gray
















www.wago.com/2002-407


















Item no.: 2002-406
Jumper; 6-way; insulated; light gray

www.wago.com/2002-406








Subject to changes. Please also observe the further product documentation!

| | | |
|---|--|--|
|  | Item no.: 2002-410/000-005 Jumper; 10-way; insulated; red | www.wago.com/2002-410/000-005 |
|  | Item no.: 2002-410/000-006 Jumper; 10-way; insulated; blue | www.wago.com/2002-410/000-006 |
|  | Item no.: 2002-410 Jumper; 10-way; insulated; light gray | www.wago.com/2002-410 |
|  | Item no.: 2002-409/000-006 Jumper; 9-way; insulated; blue | www.wago.com/2002-409/000-006 |
|  | Item no.: 2002-409/000-005 Jumper; 9-way; insulated; red | www.wago.com/2002-409/000-005 |
|  | Item no.: 2002-409 Jumper; 9-way; insulated; light gray | www.wago.com/2002-409 |
|  | Item no.: 2002-423/000-006 Continuous jumper; from 1 to 3; insulated; blue | www.wago.com/2002-423/000-006 |
|  | Item no.: 2002-423 Continuous jumper; from 1 to 3; insulated; light gray | www.wago.com/2002-423 |
|  | Item no.: 2002-433 Jumper; from 1 to 3; insulated; light gray | www.wago.com/2002-433 |
|  | Item no.: 2002-434 Jumper; from 1 to 4; insulated; light gray | www.wago.com/2002-434 |
|  | Item no.: 2002-423/000-005 Continuous jumper; from 1 to 3; insulated; red | www.wago.com/2002-423/000-005 |
|  | Item no.: 2002-435 Jumper; from 1 to 5; insulated; light gray | www.wago.com/2002-435 |
|  | Item no.: 2002-436 Jumper; from 1 to 6; insulated; light gray | www.wago.com/2002-436 |
|  | Item no.: 2002-437 Jumper; from 1 to 7; insulated; light gray | www.wago.com/2002-437 |
|  | Item no.: 2002-438 | www.wago.com/2002-438 |

Subject to changes. Please also observe the further product documentation!

| | | |
|--|--|--|
| | Jumper; from 1 to 8; insulated; light gray | |
|  | Item no.: 2022-439 Jumper; from 1 to 9; insulated; light gray | www.wago.com/2022-439 |
|  | Item no.: 2022-440 Jumper; from 1 to 10; insulated; light gray | www.wago.com/2022-440 |
|  | Item no.: 2022-472 Staggered jumper; 2-way; insulated; light gray | www.wago.com/2022-472 |
|  | Item no.: 2022-473 Staggered jumper; 3-way; insulated; light gray | www.wago.com/2022-473 |
|  | Item no.: 2022-475/011-000 Staggered jumper; 3-way; insulated; light gray | www.wago.com/2022-475/011-000 |
|  | Item no.: 2022-475 Staggered jumper; 5-way; insulated; light gray | www.wago.com/2022-475 |
|  | Item no.: 2022-476 Staggered jumper; 6-way; insulated; light gray | www.wago.com/2022-476 |
|  | Item no.: 2022-474 Staggered jumper; 4-way; insulated; light gray | www.wago.com/2022-474 |
|  | Item no.: 2022-477 Staggered jumper; 7-way; insulated; light gray | www.wago.com/2022-477 |
|  | Item no.: 2022-473/011-000 Staggered jumper; 2-way; from 1 to 3; insulated; light gray | www.wago.com/2022-473/011-000 |
|  | Item no.: 2022-479 Staggered jumper; 9-way; insulated; light gray | www.wago.com/2022-479 |
|  | Item no.: 2022-478 Staggered jumper; 8-way; insulated; light gray | www.wago.com/2022-478 |
|  | Item no.: 2022-479/011-000 Staggered jumper; insulated; light gray | www.wago.com/2022-479/011-000 |
|  | Item no.: 2022-480 Staggered jumper; 10-way; insulated; light gray | www.wago.com/2022-480 |
|  | Item no.: 2022-477/011-000 Staggered jumper; insulated; light gray | www.wago.com/2022-477/011-000 |

Subject to changes. Please also observe the further product documentation!

| | | |
|--|--|--|
|  | Item no.: 2002-492 Vertical jumper; insulated; light gray | www.wago.com/2002-492 |
|  | Item no.: 2002-481/011-000 Staggered jumper; insulated; light gray | www.wago.com/2002-481/011-000 |
|  | Item no.: 2002-481 Staggered jumper; 11-way; insulated; light gray | www.wago.com/2002-481 |
|  | Item no.: 2002-492/000-012 Vertical jumper; insulated; orange | www.wago.com/2002-492/000-012 |
|  | Item no.: 2002-482 Staggered jumper; 12-way; insulated; light gray | www.wago.com/2002-482 |
|  | Item no.: 210-103 Wire commoning chain; insulated; black | www.wago.com/210-103 |
|  | Item no.: 2002-424/000-006 Continuous jumper; from 1 to 4; insulated; blue | www.wago.com/2002-424/000-006 |

Downloads

Documentation

Bid Text

| | | | |
|---------------------------|-------------|-----------------|----------|
| 2022-2233 docx - Datei | 2019 May 14 | docx 15.6 kB | Download |
| 2022-2233 X81 - Datei | 2019 Feb 19 | xml 4.2 kB | Download |

Additional Information

| | | |
|---|---------------|----------|
| Technical Section Technical explanations | pdf 2.2 MB | Download |
|---|---------------|----------|

CAD/CAE-Data

CAE data

| | | |
|-----------------------------|-----|----------|
| EPLAN Data Portal 2022-2233 | URL | Download |
|-----------------------------|-----|----------|

WSCAD Universe 2022-2233

Subject to changes. Please also observe the further product documentation!

[URL](#) [Download](#)

ZUKEN Portal 2022-2233

[URL](#) [Download](#)

CAD data

2D/3D Models 2022-2233

[URL](#) [Download](#)

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 2022-2233

[URL](#) [Download](#)

1-conductor/1-pin double deck receptacle terminal block; Through/through terminal block; 2.5 mm²; L/N; with marker carrier; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm²; gray

Installation Notes

Coding

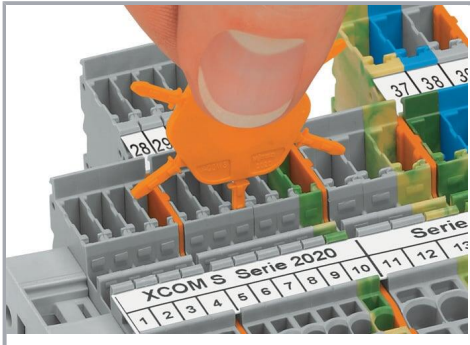


Insert coding pin into the corresponding slot and twist it off.




Coding a female plug: remove coding finger using a suitable tool.

Subject to changes. Please also observe the further product documentation!

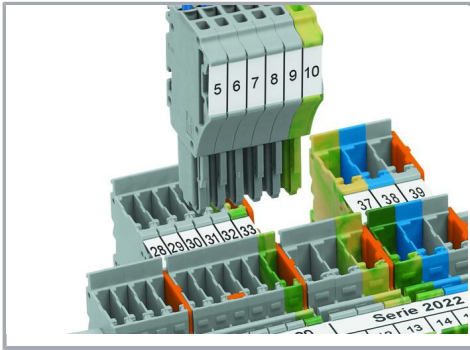

Insert coded female plug into X-COM®S-SYSTEM terminal block assembly.

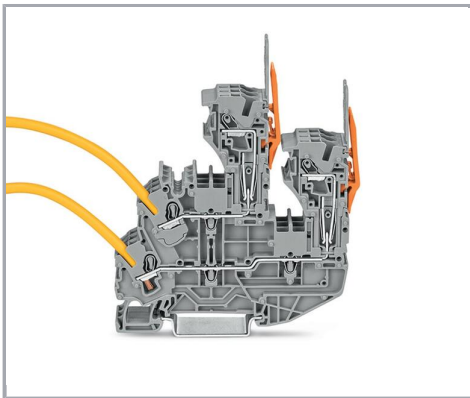


1-conductor female plug


Double-deck carrier terminal blocks can be commoned via 2002 Series Push-In Type Jumper Bars and tested via 859-500 Test Pin.

Marking


Subject to changes. Please also observe the further product documentation!

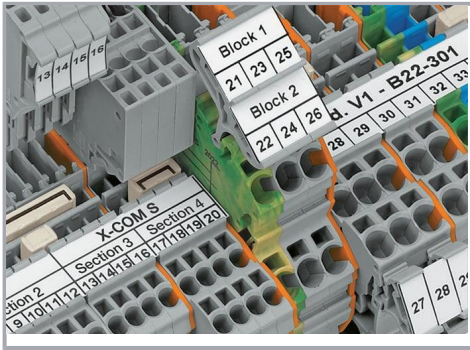

Clear marking via large marking area

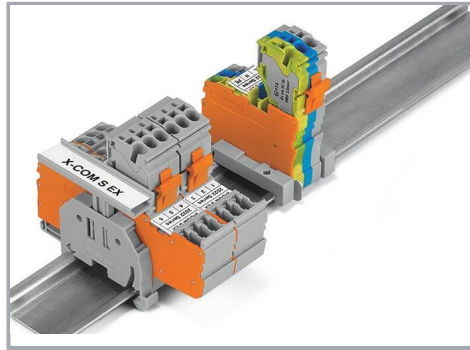

Group marking with height-adjustable group marker carrier (2009-163)

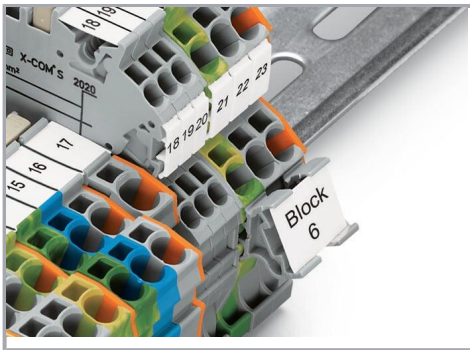

Marking via marker carrier (2009-198)

Product family

X-COM S

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!