
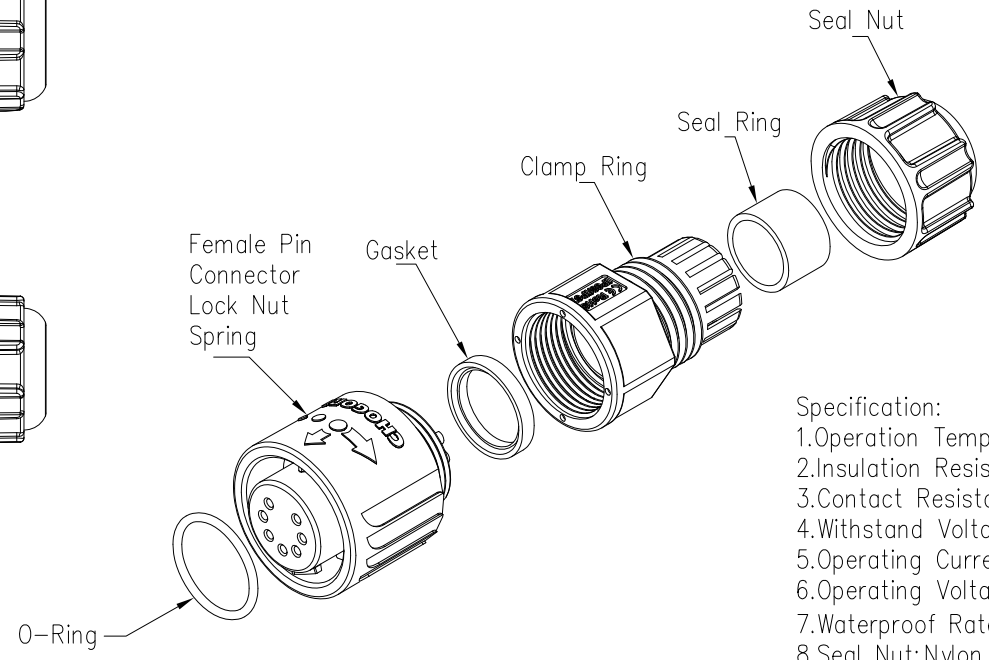
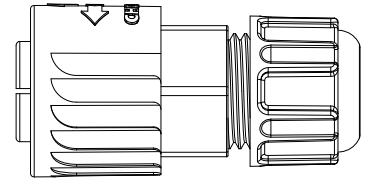



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.

REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Hary	2020/05/18

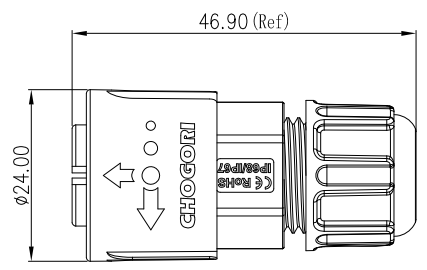


23XXX231-XX Cable Range OD
 01 OD: φ3.5mm~φ6.5mm
 02 OD: φ6.5mm~φ9.5mm
 Pin Number

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance: 100MΩ at DC500V.
 - 3.Contact Resistance: <10mΩ.
 - 4.Withstand Voltage: 1300V AC
 - 5.Operating Current: 5A
 - 6.Operating Voltage: AC 60V
 - 7.Waterproof Rate: IP67 (Mated)
 - 8.Seal Nut: Nylon, Black
 - 9.Seal Ring: Silicon, Black.
 - 10.Clamp Ring: Nylon, Black
 - 11..Gasket: Silicon, Red
 - 12.Female Pin: Copper Alloy, Gold Plated
 - 13.Connector: Nylon+GF, Black
 - 14.Lock Nut: Nylon, Orange
 - 15.Spring: SUS
 - 16.O-Ring: Silicon, Red
 - 14.RoHS Compliant.
 - 15.UL Compliant.
 - 16.Mating Cap: 804-00007-00

7 Pin	8 Pin	9 Pin
P/N: 23007231-XX	P/N: 23008231-XX	P/N: 23009231-XX

Pin Assignments Front View



UNIT: mm		DESCRIPTION Middle Series Push Lock Male Plug With Female Pin	CHOGORI [®]	PART NO 23XXX231-XX	DRAWN BY Hary	DATE 2020/05/18
TOLERANCE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	SCALE: 1:1	SHEET 1 OF 1		DWG NO	CHECKED BY Mo	DATE 2020/05/18
REV. C1	SIZE A4	* : Inspection Item		CUSTOMER	APPROVED BY Panson	DATE 2020/05/18