
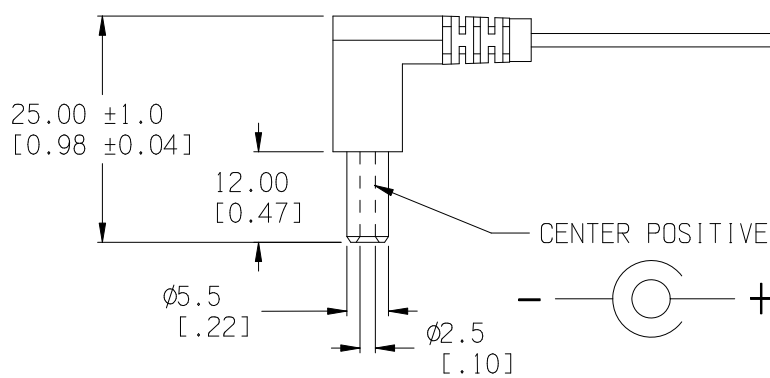



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/20/10	B	Dim. 11.50 Was 12.00	T.B.	B.S.	
08/06/14	C	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
09/18/15	D	UPDATED CORD SPECIFICATION	T.B.	B.S.	
10/23/15	E	DIM. 27.00 WAS 29.50 DIM. 10.00 WAS 9.50 DIM. 25.00 WAS 28.00 DIM. 12.00 WAS 11.50	T.B.	B.S.	

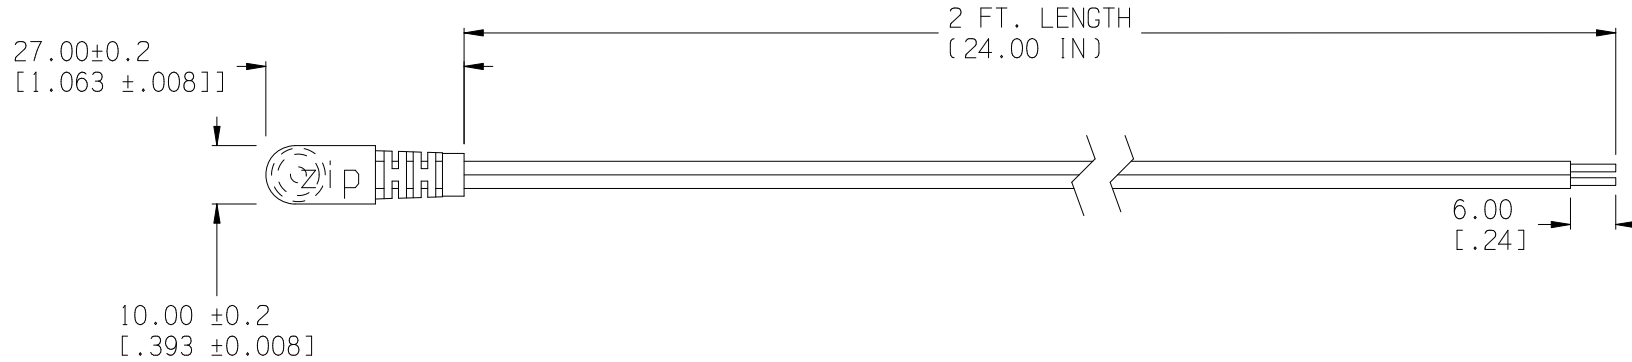

HOUSING: BLACK
 CORD: UL SPT-1 E119741, 105°C, 300V, VW-1, 18AWG, CSA
 CENTER IS POSITIVE CONTACT
 DC MOLDED PLUG: 2.5mm X 5.5mm.
 ROHS 2 COMPLIANT

Tolerance (Inches)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title 2.5mm DC MOLDED PLUG WITH 2' WIRE LEADS		
Angular ± 3°	Date 10/23/15	Drawing Number 172-4208	
		Approved By T.B.	