
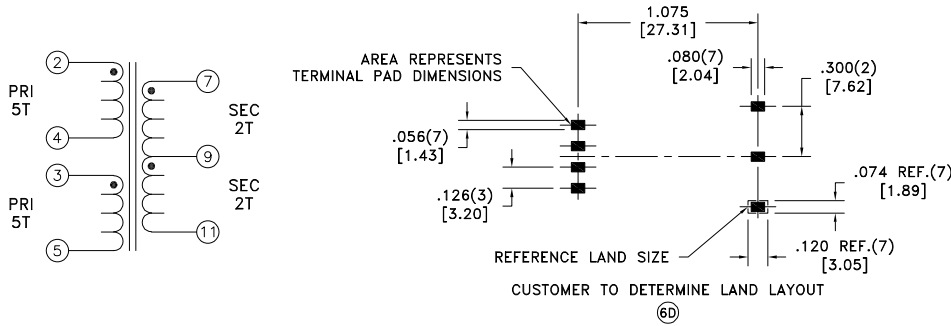


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

more than you expect

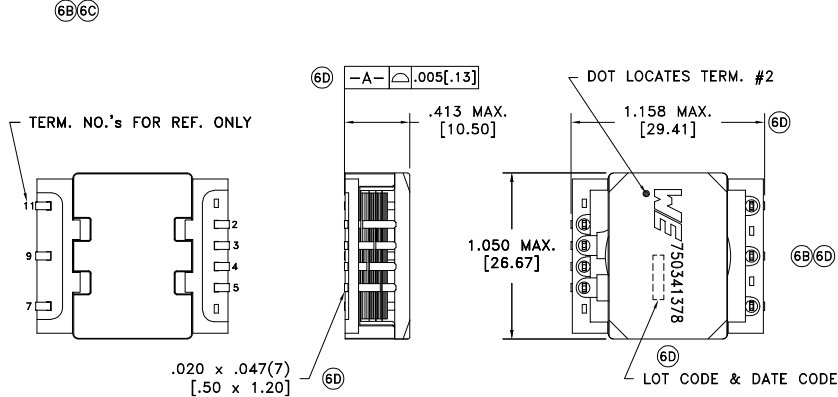

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
6D D.C. RESISTANCE	2-4 @20°C	7.0 mOhms max.
6D D.C. RESISTANCE	3-5 @20°C	7.0 mOhms max.
6D D.C. RESISTANCE	7-11 @20°C	4.5 mOhms max.
6B INDUCTANCE	2-5 tie(3+4), 100kHz, 100mVAC, Ls	410uH min.
6D LEAKAGE INDUCTANCE	2-5 tie(3+4, 7+11), 100kHz, 100mVAC, Ls	650nH max.
6B DIELECTRIC	2-7 tie(3+4), 2500VDC, 1 second	-
6D TURNS RATIO	(2-4):(3-5)	1:1
6D TURNS RATIO	(2-4):(7-11)	1.25:1

**GENERAL SPECIFICATIONS:**

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
6D	1/23	Method: Tape & Reel		Angles: ±1°	<b>TRANSFORMER</b>	<b>750341378</b>
6C	4/20	PKG-0793	Fractions: ±1/64	Decimals: ±.005 [.13]		
6B	8/14	www.we-online.com/midcom	Footprint: ±.005 [.13]	eiSos p/n: 750341378		
6A	4/13	SEE REVISION SHEET FOR REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.			