
<image/>
CHARACTERISTICS Standard: Based on MIL-DTL-38999 Series III Shell Material Connector dimension Shell Plating Colve drab Cadmium Insulator Thermoplastic Scontacts Copper Alloy Seals & Grommet Silicon Elastomer Contact Ivation Soud over copper Alloy 0.8µm minimum Scontact Plating Gold over copper Alloy 0.8µm minimum Contact Ivation Soud Allor over copper Alloy 0.8µm minimum Soud All register Free merature Rame Ourability Ston Mating cycles Proverdurity Rame -Soft to 1175°C
CHARACTERISTICS -Standard: Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : S00 Mating cycles -Delivered with Souriau contacts and Accessories
-Salt Spray : 2000 hours -Salt Spray : 2000 hours ISS DATE Latest modification - by MOD N° Designed By: Date: CUSTOMER DRAWING
BASIC SERIES: 8D 5 - 13 J 04 H A
BASIC SERIES: 8D 5 - 13 J 04 H A SLE SLE SLE Tolerances: 359 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact ORIENTATION : A NA SURIAU SOURIAU This document is the property of SOURIAU.COM SOURIAU SOURIAU This document is the property of SOURIAU.com SOURIAU it must not be reproduced or communicated without permission
PLATING : J = Olive drab Cadmium CONTACT LAYOUT : 13-04 FORMAT SOURIAU DRG N° SHEET H G F E D C B A

ſ	Ŧ	۵	וד	m		0	
		Contact Layout					
4	×	$ \begin{array}{c} $					
		+.000 (0.00) +.150 (0.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)					
ω							
	-					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts wl / either o
N						PN: 8	Count FR
					A 17-10-20 ISS DATE Designed By:	16 First Release	
					TITLE	Genera	Compo al linear rances:
→					SOURIA		£
				_	FORMAT A3	SOU 8D	RIAU 513J(
L	Н	G	F	E	D	С	

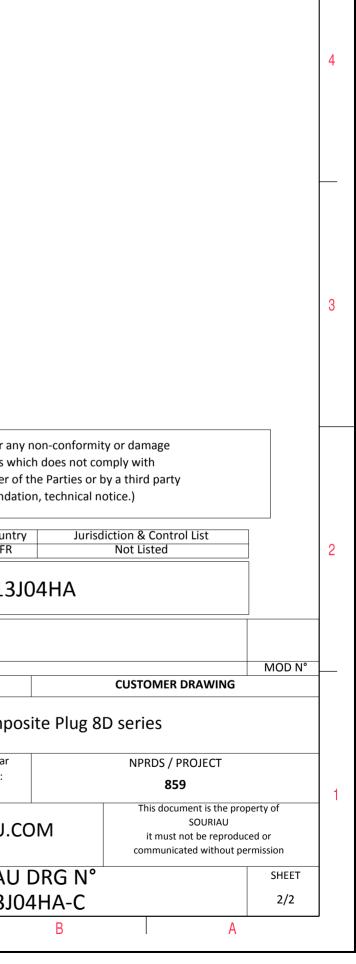

 \triangleright

σ