# HD34-24-31ST - ACTIVE

### DEUTSCH | DEUTSCH HD, DEUTSCH HD30

TE Internal #: HD34-24-31ST Housing for Female Terminals, Wire-to-Wire, 31 Position, Sealable, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 ° C], Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HD30 Housings



Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 1.59 mm [.063 in ]

Connector System: Wire-to-Wire

Number of Positions: **31** 

Sealable: Yes

All DEUTSCH HD30 Housings (358)

### Features

### Product Type Features

Connector Shape

Connector & Housing Type

Connectivity

Circular

Housing for Female Terminals

Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Contact Retainer
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Connector Seal Code	T Seal
Number of Positions	31
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V
Body Features	
Cable Exit Angle	180°

Housing for Female Terminals, Wire-to-Wire, 31 Position, Sealable, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



### **Contact Features**

Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Guide Post
Mating Alignment	With
Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	Aluminum
Dimensions	
Connector Height	47.53 mm[1.875 in]
Product Width	50.8 mm[2 in]
Product Length	41.83 mm[1.647 in]
Accepts Insulation Diameter Range	2.23 – 2.69 mm[.088 – .106 in]
Jsage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
ndustry Standards	
Degree of Protection	IP67
Packaging Features	
Packaging Quantity	200
Packaging Method	Box
Other	
Serviceable	Yes

Housing for Female Terminals, Wire-to-Wire, 31 Position, Sealable, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



### **Product Compliance**


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### **Compatible Parts**

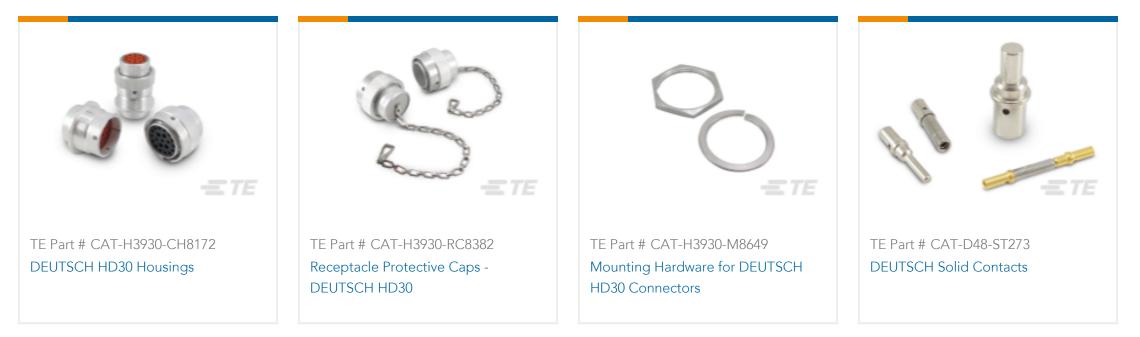

Housing for Female Terminals, Wire-to-Wire, 31 Position, Sealable, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



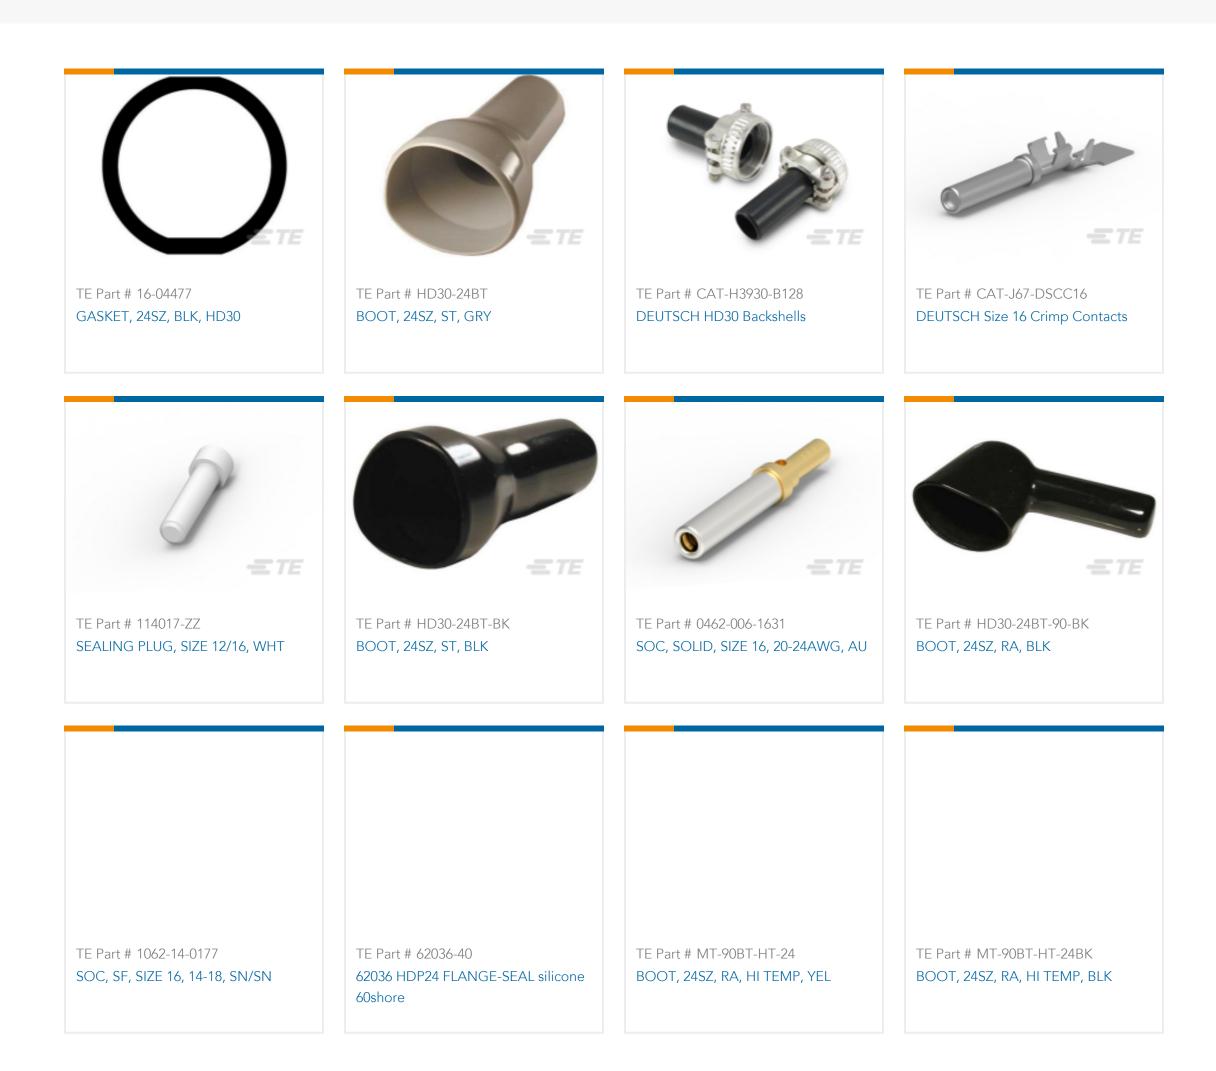

## Also in the Series | DEUTSCH HD

Automotive Connector Caps & Covers (65)	Automotive Housings(741)	Automotive Seals & Cavity Plugs(10)	Insertion & Extraction Tools(11)





Also in the Series | DEUTSCH HD30

**C** For support call+1 800 522 6752


Housing for Female Terminals, Wire-to-Wire, 31 Position, Sealable, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



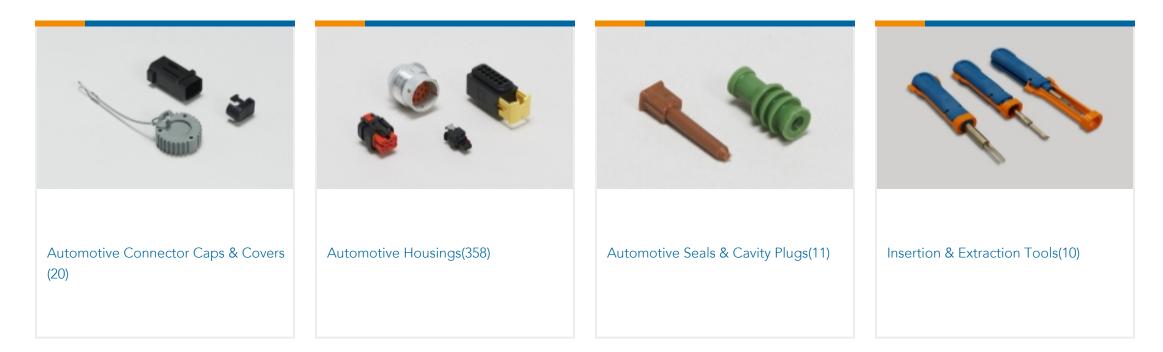

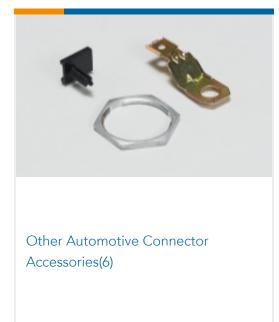

## Customers Also Bought

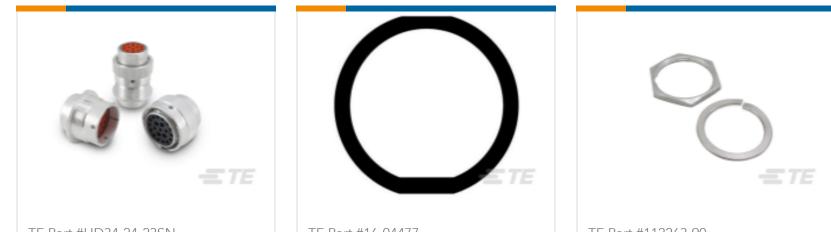

TE Part #HD34-24-23SN DEUTSCH HD30 Housings TE Part #16-04477 GASKET, 24SZ, BLK, HD30 TE Part #112263-90 Mounting Hardware for DEUTSCH HD30 Connectors

### Documents

Product Drawings

REC, 31P, AL, T, 16, S

English

### **CAD** Files

#### 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_HD34-24-31ST\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_HD34-24-31ST\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_HD34-24-31ST\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Housing for Female Terminals, Wire-to-Wire, 31 Position, Sealable, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

Product Specifications Application Specification

English