



ISSUE NUMBER	
ORIGINAL	1

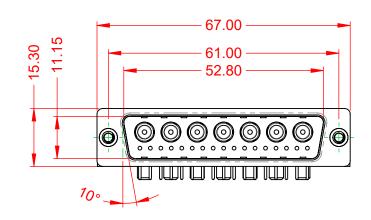




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

**OPERATING TEMPERATURE:** 

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED




COMPLIANT

POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

.XX ±0.13 .XXX ±0.05

1000V AC rms

-55°C ~ 125°C



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 629-24W7650-4N4		ISSUE
			PART NUMBER: 629-24W	7650-4N4	1

