



ISSUE NUMBER	
ORIGINAL	1

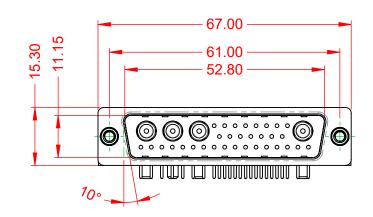




.XX ±0.13 .XXX ±0.05

## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)	
SIGNAL CONTACT CURRENT RATING SIGNAL CONTACT RESISTANCE:	: 5A PER CONTACT 10mΩ MAX.	Ø
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.	

WITHSTANDING VOLTAGE:

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN:	C.B	DATE: JAN. 01/	2019	
			CHECKED:		DATE:		
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (I	IN C.A.D. 1:1)	SHEET 1 O	- 2
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-36W		1240-2T6	ISSUE	
		QUALITY & SERVICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		PART NUME	3ER: 629-36W4	1240-2T6	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

