
| | ت | т (Г | | | |
|--|---|--|---|------------------|--------|
| CHARCTERSTOR Sender distance Sender distance <td>4</td> <td></td> <td></td> <td></td> <td></td> | 4 | | | | |
| CHARCTENSTCS Standard:::Based on MIL-DTL-38999 Series III: Standard:::Based on MIL-DTL-3899 Series III: Standard:::Based on MIL-DTL-389 Series III: Standard:::Based on Comparities III: Standard:::Based on Comparities III: Standard:::Based on Comparities III::Based IIII::Based III::B | | | LAYOUT SHOWN AS | EXAMPLE | |
| CHARCTENSTCS Standard:::Based on MIL-DTL-38999 Series III: Standard:::Based on MIL-DTL-3899 Series III: Standard:::Based on MIL-DTL-389 Series III: Standard:::Based on Comparities III: Standard:::Based on Comparities III: Standard:::Based on Comparities III::Based IIII::Based III::B | | Keving Shown as example | | | |
| Standard : Based on MiL/DTL-38999 Series III Solution interval Shell Material :::::::::::::::::::::::::::::::::::: | CHARACTERISTICS | | | | |
| Shell Matting i. Aufminum Sourchasting i. Mickel -insulator i. Mickel -insulator i. Mickel -insulator i. States - Contacts i. Contacts - Contact Plating i. Gold over copper Alley 0.8µm minimum - Outrability i. Stote and the second over the second o | | Dim Nominal | | | |
| Contact Plating: ::: Gold over copper Alloy 0.8µm minimum Durability: ::: 500 Mating cycles Delivered without Souriau contacts PN:: 8D511F02PNL 2 A 15-10-2016 First Release PN:: 8D511F02PNL A 00 N ⁺ Molt Listed A 15-10-2016 First Release MOD N ⁺ Molt Listed Molt Listed Molt Listed Molt Listed A 15-10-2016 First Release So DATE Latest modification - by Molt N ⁺ <td>-Shell Plating : Nickel -Insulator : Thermoplastic</td> <td>Z 31 Max</td> <td colspan="3">due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party</td> | -Shell Plating : Nickel -Insulator : Thermoplastic | Z 31 Max | due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party | | |
| -Durability : 500 Mating cycles -Delivered without Souriau contacts -Temperature Range : 65°C to +200°C -salt Spray : 48 hours -Mass : 13.99 g ± 10% BASIC SERIES: 8D SHELL TYPE : Slandard Crimp Contact SHELL SIZE : 11 | | | | | |
| -Temperature Range :: -65°C to +200°C -Salt Spray :: 48 hours -Mass :: 13.99 g ± 10% BASIC SERIES: 8D 5 11 F 02 P N L BASIC SERIES: 8D 5 11 F 02 P N L SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL SIZE :: 11 PLATING :: F = Nickel CONTACT TYPE :: Plug with RFI Shielding PLATING :: F = Nickel CONTACT TYPE :: Plug with RFI Shielding CONTACT TYPE :: Plug bit RFI Shielding CONTACT TYPE :: Plug with RFI Shielding CONTACT TYPE :: Plug bit RFI Shielding CONTACT TYPE :: Plu | -Durability : 500 Mating cycles | | | | |
| -Salt Spray : 48 hours -Mass : 13.99 g ± 10% MoD N ^a -Mass : 13.99 g ± 10% BASIC SERIES: 8D 5 - 11 F 02 P N L BASIC SERIES: 8D 5 - 11 F 02 P N L Delivered W/O Contacts SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 PLATING : F = Nickel DELivered W/O Contact LAYOUT : 11-02 CONTACT TYPE : PIN(500 Matings) PLATING : F = Nickel DELivered W/O Contact LAYOUT : 11-02 CONTACT TYPE : PIN(500 Matings) DELivered W/O Contact LAYOUT : 11-02 CONTACT TYPE : PIN(500 Matings) DELivered W/O Contact LAYOUT : 11-02 CONTACT TYPE : PIN(500 Matings) DELivered W/O Contact LAYOUT : 11-02 CONTACT TYPE : PIN(500 Matings) DELivered W/O Contact LAYOUT : 11-02 CONTACT LAYOUT : 11 | | | | | |
| Basic Series: 8D 5 11 F 02 P N L Customer Basic Series: Scale Sca | -Salt Spray : 48 hours | | | | |
| BASIC SERIES: 8D 5 - 11 F 02 P N L Contact SCALE N N Scale N N State | | | | CUSTOMER DRAWING | MOD N° |
| BASIC SLILLS. SB SB I | | | TITLE Aluminium Plug 8D series | | |
| CONTACT TYPE Standard Crimp Contact This document is the property of SOURIAU SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) SOURIAU WWW.SOURIAU.COM It must not be reproduced or communicated without permission PLATING : F = Nickel CONTACT LAYOUT : 11-02 FORMAT SOURIAU DRG N° SHEET A3 8D511F02PNL-C 1/2 | | | | | |
| PLATING : F = Nickel FORMAT SOURIAU DRG N° SHEET A3 8D511F02PNL-C 1/2 | CONTACT TYPE : Standard Crimp Contact | CACT TYPE SOURIAU SOURIAU SOURIAU SOURIAU CACT TYPE SOURIAU SOURIAU SOURIAU SOURIAU SOURIAU it must not be reproduced or | | | |
| A3 8D511F02PNL-C 1/2 | | | | | |
| | | | | | |
| | H G | F E | | B A |] |

| r | Ŧ | ۵ | т | m | D | 0 |
|---|--|--|---|---|--|--|
| | | Contact Layout | | | | |
| 4 | .x .0 (2) | 95 41mm) (2.41mm) | | | | |
| | Cont positi ID A B Sheli Arrangement size no. 11 -2 | X-axis Y-axis (mm) (mm) + -0.95 (2.41) 095 (2.41) +.000 (.00) | | | | |
| ယ | | | | | | |
| | + | | | | | SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda |
| N | | | | | | PN: 8D511 |
| | | | | | A 15-10-20 ISS DATE Designed By: | 16 First Release Latest modification - by Date: |
| | | | | | SCALE | General linear Tolerances: |
| _ | | | | | SOURIA | U WWW.SOURIAU. |
| | | 1 | | 7 | FORMAT A3 | SOURIAU 8D511F |
| | Н | G | F | E | D | C |

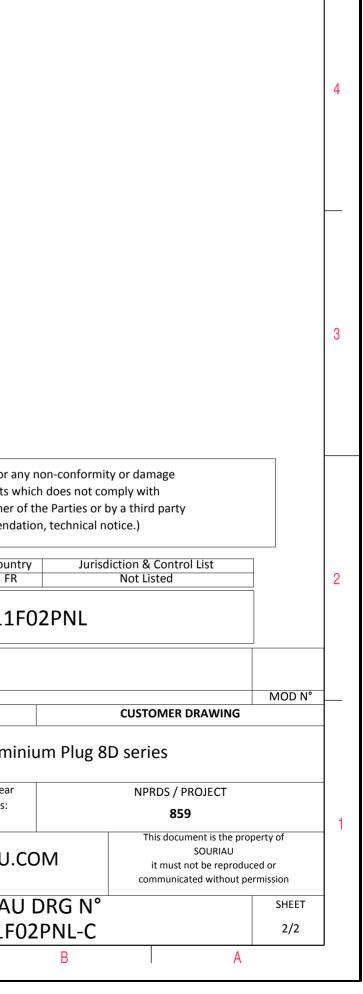

 \triangleright

σ