

т	۵	П	m	0



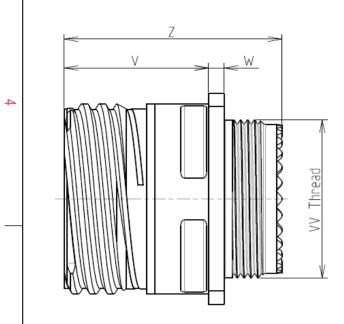

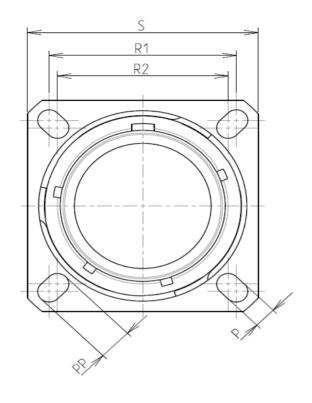

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

<ul> <li>Shell Material : Aluminium</li> <li>Shell Plating : Nickel</li> <li>Insulator : Thermoplastic</li> <li>Contacts : Copper Alloy</li> <li>Seals &amp; Grommet : Silicon Elastomer</li> <li>Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>Durability : 500 Mating cycles</li> <li>Delivered without Souriau contacts</li> <li>Temperature Range : -65°C to +200°C</li> <li>Salt Spray : 48 hours</li> <li>Mass : 30.91 g ± 10%</li> </ul>	_			
<ul> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8μm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered without Souriau contacts</li> <li>-Temperature Range : -65°C to +200°C</li> <li>-Salt Spray : 48 hours</li> </ul>		-Shell Material	: Aluminium	
-Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles -Delivered without Souriau contacts -Temperature Range : -65°C to +200°C -Salt Spray : 48 hours		-Shell Plating	: Nickel	
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles -Delivered without Souriau contacts -Temperature Range : -65°C to +200°C -Salt Spray : 48 hours		-Insulator	: Thermoplastic	
<ul> <li>Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>Durability : 500 Mating cycles</li> <li>Delivered without Souriau contacts</li> <li>Temperature Range : -65°C to +200°C</li> <li>-Salt Spray : 48 hours</li> </ul>		-Contacts	: Copper Alloy	
-Contact Plating E Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered without Souriau contacts -Temperature Range : -65°C to +200°C -Salt Spray : 48 hours		-Seals & Grommet	: Silicon Elastomer	
-Durability       : 500 Mating cycles         -Delivered without Souriau contacts         -Temperature Range       : -65°C to +200°C         -Salt Spray       : 48 hours	N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum	
-Temperature Range : -65°C to +200°C -Salt Spray : 48 hours		-Durability	: 500 Mating cycles	VV
-Salt Spray : 48 hours		-Delivered without Sou	uriau contacts	
		-Temperature Range	65°C to +200°C	
		-Salt Spray	: 48 hours	
		-Mass	: 30.91 g ± 10%	

8D 0

G

17

-

F

75

S

F

B L

P         3.25±0.2           PP         4.93±0.2           R1         26.97           R2         24.61           S         33.3±0.3           V         20.83+0/-1.25
R1         26.97           R2         24.61           S         33.3±0.3
R2         24.61           S         33.3±0.3
S 33.3±0.3
V 20.83+0/-1.25
W 2.1/2.5
Z 31.5 Max
/V THREAD M25x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : B** 



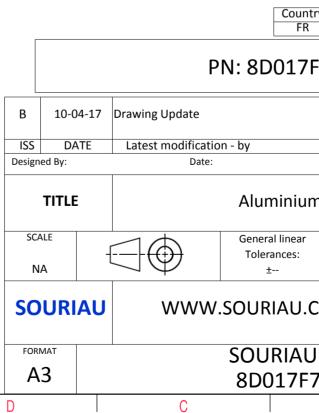

σ		А				
				4		
S EXAMPLE				3		
any non-conformi which does not co						
er of the Parties or ladation, technical n	by a third part	ty				
untry Juriso	diction & Cont Not Listed	trol List	]	2		
7F75SBL						
			1			
	CUSTOME	R DRAWING	MOD N°			
Im Receptacle 8D series						
ar	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N°			SHEET			
F75SBL-C		A	1/2	J		
_						

		۵	г П	m	D	0	
		Contact Layout				F SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cuto
4		75			Σ	REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75				Max. thickness panel for receptacle: Ty	_Ø⊺ ype 0: front m
ယ						Dim ØA ØAA R1 ØT	A
	-					SOURIAU shall not be li	
						due to a use of the P the Specifications issued (professional rec	by either
D						PN: 8	
					ISS DATE Designed By:	Date:	
-					SCALE NA	Gene	uminiu neral linear llerances: ±
					FORMAT		
		1	1		A3	8D	URIAU 0017F
	Н	G	l F	E	D	С	

