

RFID Reader (Passive)

ARRUN5-915.000MHz

RoHS/RoHS II Compliant
MSL level: Not Applicable



120.0 x 120.0 x 9.5mm

FEATURES:

- High Gain
- Easy to install
- RF Cable and Connector
- RoHS Compliant


TYPICAL APPLICATIONS:

RFID systems for Logistic & Inventory Management of Retail, Pharmaceutical, Automotive Industries; Industrial automation, Contactless smart cards.


STANDARD SPECIFICATIONS:

Parameters	Min.	Typ.	Max.	Units	Note
Center Frequency		915±3		MHz	
V.S.W.R		1.5			
Bandwidth	20.0			MHz	V.S.W.R<1.5
Impedence		50		Ω	
Gain		5.5		dBi	Based on 120×120mm ground plane
Polarization		RHCP			
Working Temperature	-40		+80	°C	
Storage Temperature	-45		+85	°C	

SMITH CHART:

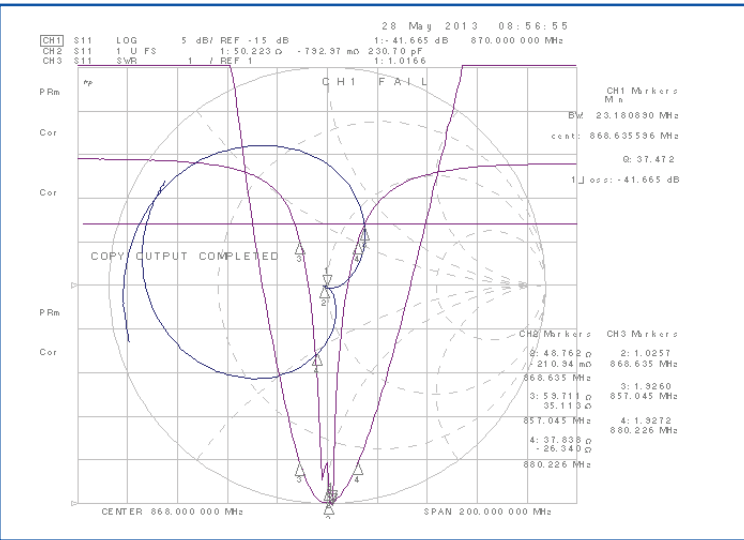

RADIATION PATTERN

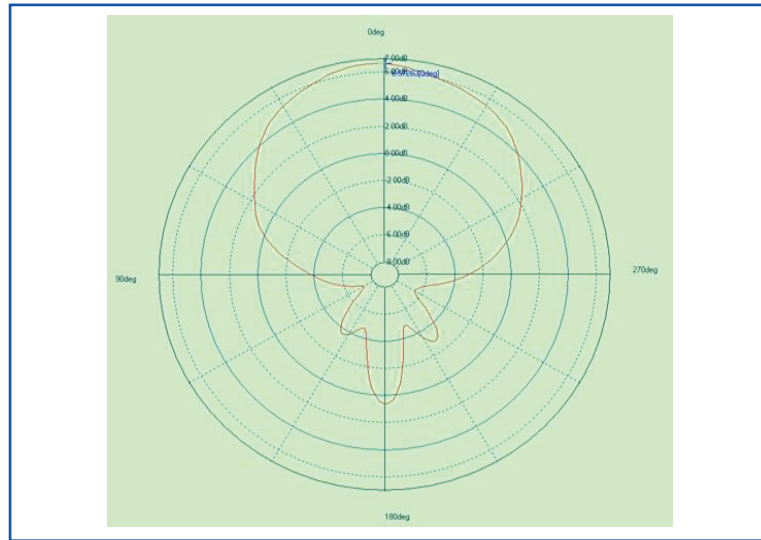

OUTLINE DRAWING:

Description	Material
Antenna Type	Dielectric Ceramics 80x80x6mm
PCB	FR4, 120mm
RF Cable	RG178, Ø 2.7±0.3mm, L1=60±5mm, L=110±5mm
RF Connector	MMCX-JW3
Thickness	9.5mm Max


Other Tolerance: ±0.5mm

Unit: mm

RFID Reader (Passive)

ARRUN5-915.000MHz

RoHS/RoHS II Compliant



120.0 x 120.0 x 9.5mm

TAPE & REEL:

Each small box contains 5pcs of RFID reader. There are 60 pcs per outer box.

Package Type	Quantity
Small Box	5 pcs
Outer Box	60 pcs

Unit: mm

CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

NOTE:

- 1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4) When changing your production process, please notify ABRACON immediately.
- 5) ABRACON Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.
- 6) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.